www.innovair.com C USTER TO US ALE CERTIFIED




## DELUXE 17

Ductless Inverter Heat Pump Mini Split System

## DELUXE 17

## **Key Indoor Features**

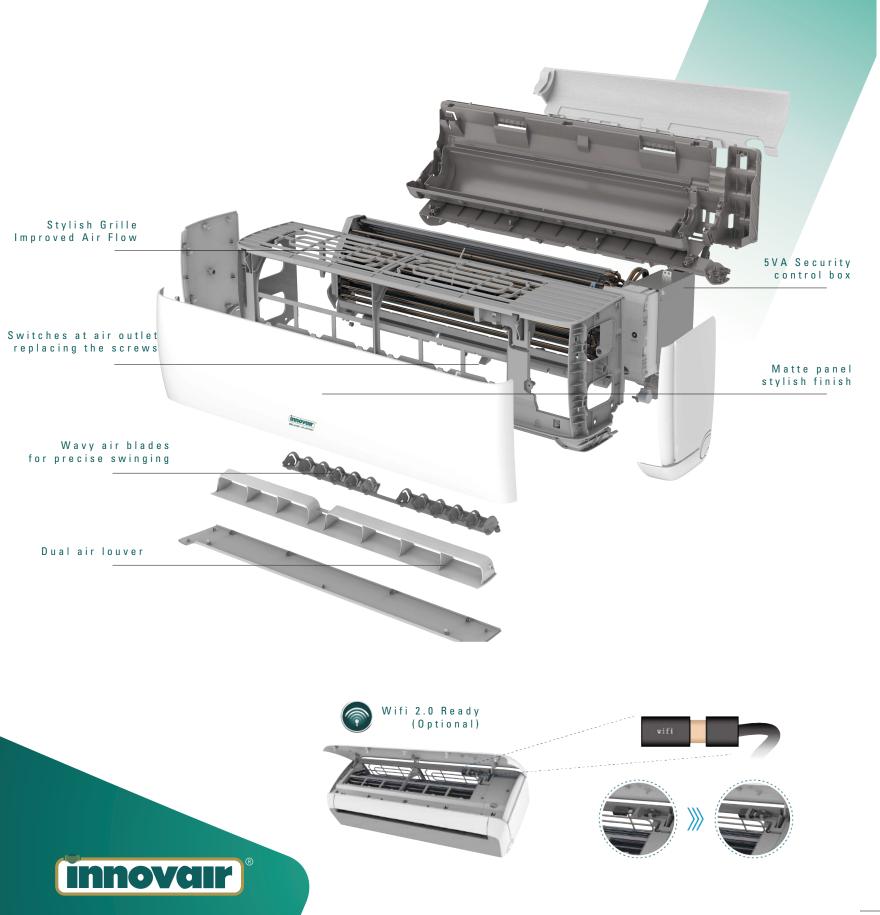

## Removable Underjaw



### **Features**

- Decreases installation time
- Reduce number of installers
- Easy access pipe installation

# Super Voltage Operation



#### **Features**

- Operates as low as 130V
- Operates as high as 270V
- DC outdoor motor

## Self-Cleaning + Evaporator



### **Features**

- Auto-cleaning by frosting and defrosting
- Helps prevent bacterial growth
- Automatically filters out polluition

## Fish-Fin Air Blade



### **Features**

- Extends the air flow and distance
- Distributes a uniform air flow
- Creates a quieter operation

# New Inverter Technology



### **Features**

- 1Hz Compressor Operation
- 0.1°C Temperature Control
- 0.3W Stand by

## Gold-Fin Protective Coils



#### **Features**

- Helps against corrosive environments
- Protection against insects and dust
- Long lasting efficiency



## **DELUXE 17 SERIES SPECIFICATIONS**

	MODEL		LIN13H14A17	LIN13H24A17	LIN18H24A17	LIN24H24A17	LIN36H23A17
SYSTEM	CAPACITY	BTU/H	12,000	12,000	18,000	24,000	36,000
	ELECTRICAL	Volt / Hertz	115V / 60Hz	208~230V / 60Hz	208~230V / 60Hz	208~230V / 60Hz	208~230V / 60Hz
	COOLING	Rated Current (A)	11.4	5.6	8.3	11.1	16.0
		SEER	17.0	17.0	17.0	17.0	16.5
	HEATING	Rated Current (A)	10.2	5.2	7.9	10.2	15.7
		HSPF	9.0	9.0	9.0	9	8.2
	OPER. AMBIENT TEMP.	Cooling (°F)			5 °F~122°F		
		Heating (°F)			5 °F ~ 86 °F		
	CIRCUIT BREAKER SIZE	(A)	20.0	15.0	15.0	20.0	25.0
	MOISTURE REMOVAL	Liter/Hr	1.5	1.5	1.9	2.5	3
	REFRIGERANT	R410A (oz)	30.7	32.1	48.0	60.0	88.2
	REFRIGERANT CONNECTIONS	Liquid (in)	1/4"	1/4"	1/4"	1/4"	1/2"
		Suction (in)	1/2"	1/2"	1/2"	5/8"	5/8"
		Pre-Charged Length (Ft)	25	25	25	25	25
		Maximum Length (Ft)	82	82	82	82	82
		Maximum Height (Ft)	33	33	49	49	49
IND OOR UNIT	AIR FLOW	CFM	215 ~ 375	215 ~ 375	355 ~ 575	525 ~ 755	715 ~ 955
	SOUND LEVEL	dB(A)	30 ~ 42	30 ~ 42	32 ~ 46	34 ~ 49	37 ~ 52
	CONTROL	Remote Control	LCD WIRELES REMOTE CONTROL or WIFI (optional)				
		Auto Restart Protection	YES TIME DELAY				
	DIMENSIONS	Unit W x H x D (in)	34 ½ x 11 ½ x 8	31 x 11 ½ x 8	36 ¾ x 12 ¼ x 8 ¾	44 x 13 x 13	49 ¼ x 10 x 14 ¼
	WEIGHT	Net / Gross (LBs.)	23	18	26	31	35
OUTDOOR UNIT	COMPRESSOR	RLA	6.0	6.0	7.5	9.5	10.5
		LRA	-	-	-	-	-
	SOUND LEVEL	dB(A)	54	54	56	58	60
	DIMENSIONS	Unit W x H x D (in)	28 ½ x 21 ¼ x 11	28 ½ x 21 ¼ x 11	31 ¼ x 21 ¼ x 12 ¼	32 ¼ x 15 ½ x 12	35 ½ x 27 ½ x 14
7	WEIGHT	Net / Gross (LBs.)	57	62	77	93	128

<sup>\*</sup>Specifications are subject to changes without notice. \*\* Model numbers, pictures, and specifications of all products are subject to change without further notice.

#### **ACCESSORIES INCLUDED**



- 10Ft Copper Kit
- Inter-connecting cable kit
- Installation Manual
- Remote Control Holder • LCD Wireless remote control







**KEY FEATURES** 













Turbo Air Flow



Innovative Ideas in Air Conditioning





Gold-Fin Coating

#### **DISTRIBUTED BY**

