


Features & Benefits



- 20 L/min continuous hot water delivery @ 25°C rise
- Remote Temperature Controller options
- 50°C models available (876A20), requiring no tempering valve<sup>1</sup>
- LED display for easy fault diagnosis
- Natural gas & Propane models
- Accessories: Recess Box 299427  
Security Cage 299867  
Wall Mount Security Kit 299868
- 12 year heat exchanger warranty<sup>2</sup>

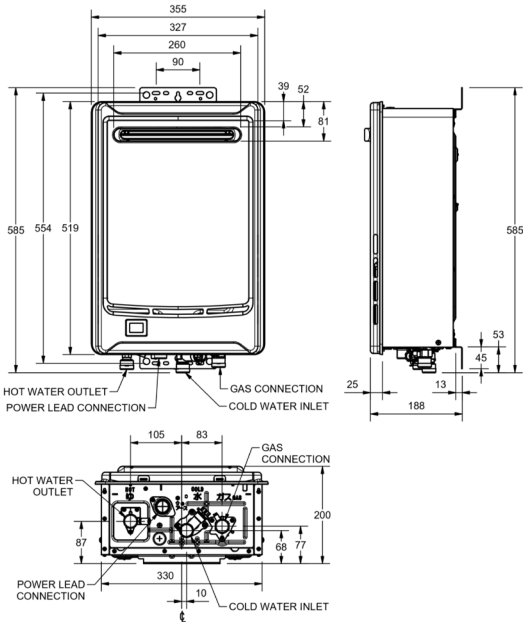

| MODEL                            | 876A20<br>874A20 |
|----------------------------------|------------------|
| Min. Operating Flow rate (L/min) | 2.0              |
| Nom. Gas Consumption (MJ/hr)     | 157              |
| Max Water Supply Pressure (kPa)  | 1000             |
| Min Water Supply Pressure (kPa)  | 120              |
| Water Connections                | R 3/4            |
| Gas Connection                   | R 3/4            |
| Approx. Weight (Empty) kg        | 16               |



<sup>1</sup> 60°C and higher temperature models and some applications require a tempering valve in accordance with AS 3500.4.  
<sup>2</sup> See the Rheem warranty in the product's Owner's Guide or view product warranties at [www.rheem.com.au/warranty](http://www.rheem.com.au/warranty)