




NameLessRC OP400 VTX Transmitter Instructions


[Home](#) » [NameLessRC](#) » NameLessRC OP400 VTX Transmitter Instructions 

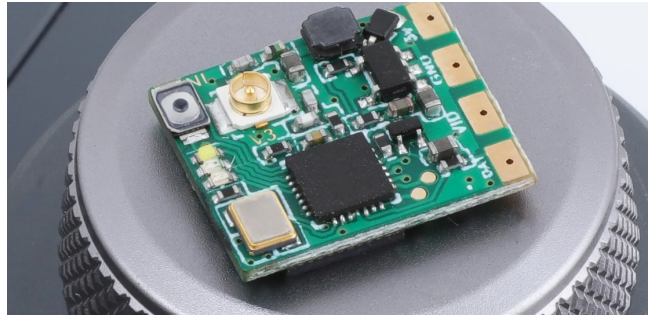

Contents

- [1 NameLessRC OP400 VTX Transmitter](#)
- [2 Specifications:](#)
- [3 # SMARTAUDIO](#)
- [4 # TRAMP](#)
- [5 Package Included:](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)

NameLessRC OP400 VTX Transmitter

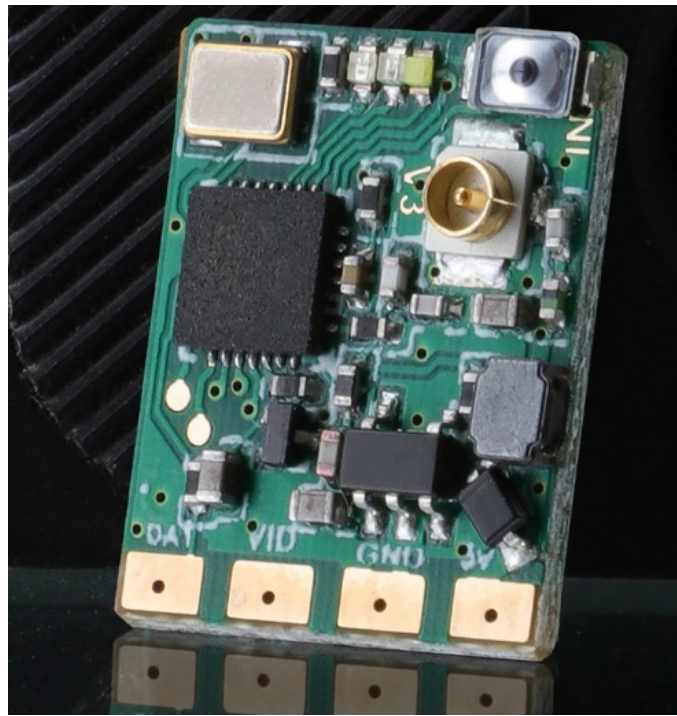

- Open VTx aims to provide firmware with both the
- SmartAudio and Tramp protocols. Either protocol can be
- used on the flight controller and on VTx power up the
- protocol used is automatically detected by OpenVTx.

Main Features

OpenVTX firmware preload
Smartaudio / Tramp ready

Specifications:

- Brand Name:NameLessRC
- Item Name: OP400 VTX
- Transmitting Power: 0/RCE/25mw/100mw/400mw
- BAT: 5V
- Frequency: 5.8G 48CH
- Antenna: IPEX
- Size: 12.5MM*15MM*3.5MM
- Weight: 0.9g
- Copy and paste your choice of protocol VTx table into t
- he Betaflights CLI.


SMARTAUDIO

- # vtxtable
- vtxtable bands 6
- vtxtable channels 8
- vtxtable band 1 BOSCAM_A A FACTORY 5865 5845 5825

- 5805 5785 5765 5745 5725
- vtxtable band 2 BOSCAM_B B FACTORY 5733 5752 5771
- 5790 5809 5828 5847 5866
- vtxtable band 3 BOSCAM_E E FACTORY 5705 5685 5665
- 5645 5885 5905 5925 5945
- vtxtable band 4 FATSHARK F FACTORY 5740 5760 5780
- 5800 5820 5840 5860 5880
- vtxtable band 5 RACEBAND R FACTORY 5658 5695 573
- 2 5769 5806 5843 5880 5917
- vtxtable band 6 LOWRACE L FACTORY 5333 5373 5413
- 5453 5493 5533 5573 5613
- vtxtable powerlevels 5
- vtxtable powervalues 1 2 14 20 26
- vtxtable powerlabels 0 RCE 25 100 400
- save

TRAMP

- # vtxtable
- vtxtable bands 7
- vtxtable channels 8
- vtxtable band 1 BOSCAM_A A CUSTOM 5865 5845 5825
- 5805 5785 5765 5745 5725
- vtxtable band 2 BOSCAM_B B CUSTOM 5733 5752 5771
- 5790 5809 5828 5847 5866
- vtxtable band 3 BOSCAM_E E CUSTOM 5705 5685 5665
- 5645 5885 5905 5925 5945
- vtxtable band 4 FATSHARK F CUSTOM 5740 5760 5780
- 5645 5885 5905 5925 5945
- vtxtable band 4 FATSHARK F CUSTOM 5740 5760 5780
- 5800 5820 5840 5860 5880
- vtxtable band 5 RACEBAND R CUSTOM 5658 5695 5732
- 5769 5806 5843 5880 5917
- vtxtable band 6 LOWRACE L CUSTOM 5333 5373 5413
- 5453 5493 5533 5573 5613
- vtxtable band 7 IMD6 I CUSTOM 5732 5765 5828 584
- 0 5866 5740 0 0
- vtxtable powerlevels 5
- vtxtable powervalues 1 2 25 100 400
- vtxtable powerlabels 0 RCE 25 100 400

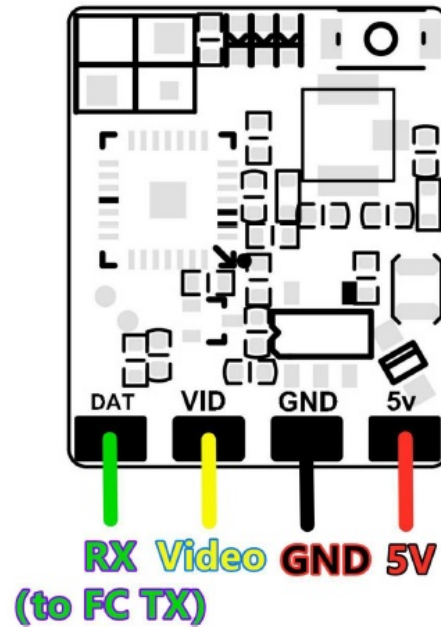

Package Included:

- 1 x OP400 VTX
- 1 x 5.8G Linear Antenna
- 4 x Silicone Wire
- 1 x Heat shrinkable tube

Documents / Resources

 NameLessRC OP400 VTX NameLessRC OP400 VTX Op400 VTX also provides features with both the NameLessRC and Taranis protocols. Other protocol users need to be able to control and use the VTX on the protocol used by automatically identified by Op400 VTX.	NameLessRC OP400 VTX Transmitter [pdf] Instructions OP400 VTX Transmitter, OP400 VTX, Transmitter
---	--