

Contents [[hide](#)]

- [1 OLE MAX490 High Speed Transceiver](#)
- [2 Description](#)
- [3 Ordering Information](#)
- [4 Pin logic diagram and description](#)
- [5 Dc electrical characteristics](#)
- [6 Conversion characteristics](#)
- [7 Feature Sheet](#)
- [8 Package Outline Dimensions](#)
- [9 FAQ](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)
- [11 Related Posts](#)

OLE


OLE MAX490 High Speed Transceiver



Description

The MAX490, which is used for RS-485/RS-422 communication, is a high-speed transceiver with full-duplex communication that includes a driver and a receiver. When the receiver input is open or shorted, it ensures that the receiver output is at a logic high level. If all transmitters attached to the terminated matching bus are disabled (high-impedance), the receiver will output a logic high level.

The MAX490 has a low-rate driver that can reduce EMI and reflections caused by improper terminal matching cables, and achieve error-free data transfer rates up to 2.5Mbps. In addition, the MAX490 has a 1/8 unit load input impedance, and up to 256 transmitters and receivers can be attached to the bus.

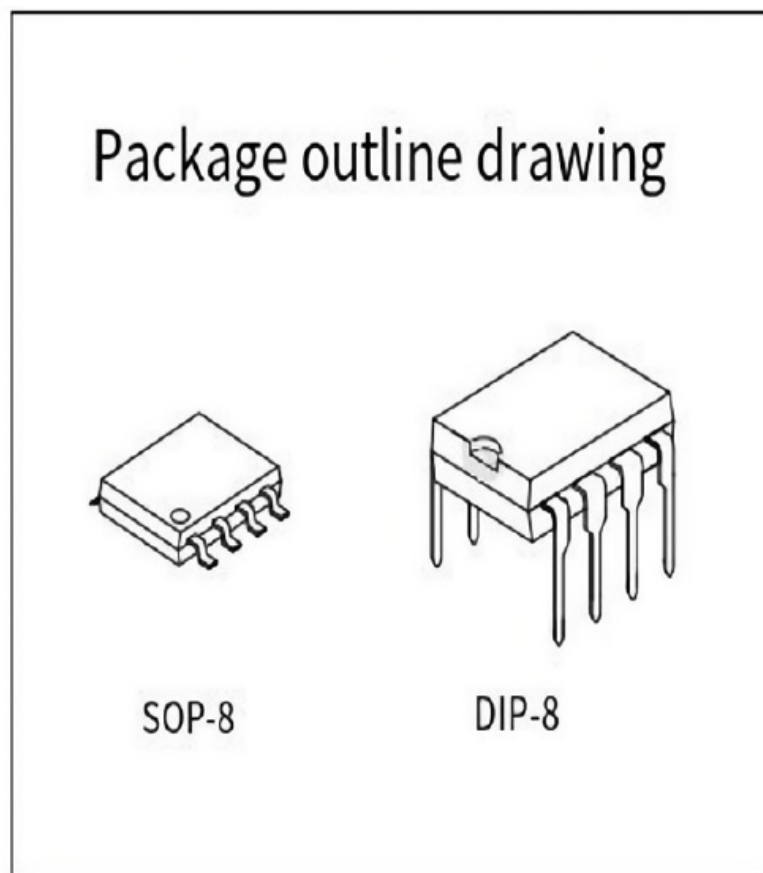

Feature

- Wide power range, full duplex
- Up to 256 transceivers are allowed to be attached on the bus
- Powerful swing rate control function helps to achieve error-free data transmission
- Provide a standard SOP-8 and DIP-8 package

Applications

- Industrial control
- Security system
- Power inverter
- POS machine
- Lighting system

Ordering Information

Product Model	Package Type	Marking	Packing	Packing Qty
XBLW MAX490ESA	SOP-8	MAX490ESA A	Tape	2500Pcs/Reel
XBLW MAX490EPA	DIP-8	MAX490EPA A	Tube	2000Pcs/Box

Pin logic diagram and description

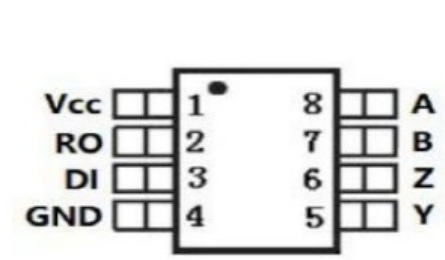


Figure 1: Pin diagram of MAX490

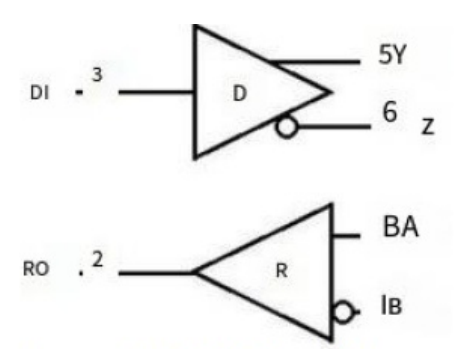


Figure 2: MAX490 logic diagram

Pin Description

lead	Name	Function
Full duplex		
1	VCC	Positive phase supply end : $3.0 \leq VCC \leq 5.5V$

2	RO	Receiver output. If $A-B \geq -50\text{mV}$, RO output is high; If $A-B \leq -200\text{mV}$, RO output is low
3	DI	Drive input. The low level on the DI forces the same phase output to be low level and the reverse phase output to be high level. Similarly, a high level on the DI will force the in-phase output to be high and the anti-phase output to be low
4	GND	Ground
5	Y	Drive in-phase output end
6	Z	Drive inverting output end
7	B	Receiver inverting input
8	A	Receiver in-phase input

Absolute maximum rating

Project	Symbol	Parameter	
Supply voltage	VCC	+ 7	V
Drive input voltage	DI	-0.3 to VCC+0.3	V
Drive output voltage	Y, Z	-8 to + 13	V
Receiver input voltage	A, B	-8 to + 13	V
Receiver output voltage	RO	-0.3 ~ VCC+0.3	V
Continuous power consumption	SOP8	471	mW

Operating temperature range		0 ~ +70	°C
Storage temperature		-65 ~ +150	°C
Welding temperature, 10S	TLEAD	245	°C

Note

Any application attempt above the absolute maximum rating has the potential to cause permanent damage to the product, and the absolute maximum rating does not mean that the product will function properly under conditions other than the calibrated electrical characteristics.

Dc electrical characteristics

(unless otherwise stated, $V_{CC}=+5V\pm5$, $T_A=T_{MIN} \sim T_{MAX}$, typical values at $V_{CC}=+5V$, $T_A=25^{\circ}C$) (Note 1)

Parameter	Symb ol	Test condition	MIN	TY P	MAX	Uni ts
Drives						
Supply voltage	VCC		3.0		5.5	V
Differential driver output (no load)	Vod1	Figure 4	1.5		5	V
Differential driver output	Vod2	Figure 4, R=50Ω(RS-422)	2.0		5	V
		Figure 4, R=27Ω(RS-485)	1.5		5	

Amplitude change in differential output voltage (Note 2)	ΔV_{od}	Figure 4, R=50 Ω or R=27 Ω				0.2	V
Drive common mode output voltage	V_{oc}	Figure 4, R=50 Ω or R=27 Ω		1		3	V
Amplitude change in common mode voltage (Note 2)	ΔV_{oc}	Figure 4, R=50 Ω or R=27 Ω				0.2	V
Input high voltage	V_{ih1}	DE,DI,/RE		2.0			V
Input low voltage	V_{il1}	DE,DI,/RE				0.8	V
DI input lag	V_{hys}				100		mV
Input current (A,B) full duplex	lin4	DE=GND VC C=GND or5.2 5V	VIN= 1 2V			125	μA
			VIN=-7 V	- 75			
Drive short circuit output current	Iosd	-7V \leq VOUT \leq VCC		- 250			mA
		0V \leq VOUT \leq 12V				250	
		0V \leq VOUT \leq VCC		\pm 25			
Receiver							
Receiver differential threshold voltage	V_{th}	-7V \leq VCM \leq 12V		- 200	- 1 10	- 50	mV
Receiver input lag	ΔV_{TH}				30		mV

Receiver output high voltage	Voh	IO=-4mA,VID=-50mV	VCC -1.5			V
Receiver output low voltage	Vol	IO=4mA,VID=-200mV			0.4	V
Three state output current at receiver end	Iozr	$0.4V \leq V_O \leq 2.4V$			± 1	μA
Receiver input impedance	Rin	$-7V \leq V_{CM} \leq 12V$	96			K Ω
Receiver output short-circuit current	Iosr	$0V \leq V_{RO} \leq V_{CC}$	± 7		± 95	mA
Supply current						
Static working current	Icc	No load, DI=0 or VCC		270	600	μA
ESD electrostatic protection						
ESD HBM		ESD HBM			3000	V

Note 1: All current into the device is positive and all current out of the device is negative; All voltages, if without exception, are stated to be correct.

Note 2: When the DI input changes state, ΔV_{OD} and ΔV_{OC} are V_{OD} and V_{OC} changes, respectively.

Note 3: Maximum current is used for peak current only before feedback current limit, minimum current is used during current limit.

Conversion characteristics

(If not stated otherwise, $V_{CC} = +5V \pm 5\%$, $T_A = T_{MIN} \sim T_{MAX}$, typical value at $V_{CC} = +5V$, $T_A = 25^\circ C$)


Parameter	Symb ol	Condition	MIN	TYP	MAX	Uni ts
Drive input to output	Tdplh	Figures 5 6 RDIFF=54 Ω CL1=CL2=100pF	250	720	900	ns
	Tdphl		250	720	900	
Drive output t DPLH – t D P H L	Tdhke w	Figures 5 6 RDIFF=54 Ω CL1=CL2=100pF		– 3	±100	ns
Drive up or down time	t DR, t DF	Figures 5 6 RDIFF=54 Ω CL1=CL2=100pF	200	530	750	ns
Maximum data rate	Fmax				2.5	M
Receiver input to output	Trplh Trphl	Figures 7 a n d 8 , rise and fall times, VID ≥ 2.0V VID≤1 5 n s		127	200	ns
Differential receiver t DPLH – t D P H L	Trskd	FIG. 7 a n d 8 , rise an d fall times of VID ≥2 .0V VID≤1 5 n s		3	±30	ns

Feature Sheet

Send		
Type	Output	
DI	B	A
1	0	1
0	1	0

Receive

Input	Output
A-B	RO
$P - 0.05 - V$	1
0.2 V or less	0
Open/shorted	1

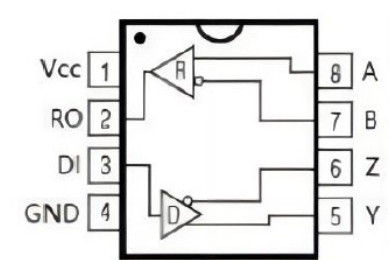

DIP/SOP

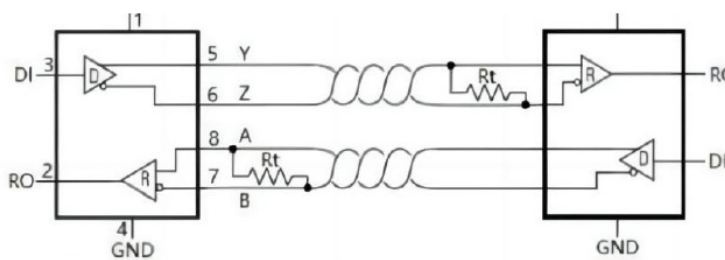


Figure 3: MAX490 typical full duplex application circuit

Expatiate

The MAX490 high-speed transceiver for RS-485 / RS-422 communication contains a drive and receiver. It has a failure protection circuit to ensure that the receiver output logic high level when the receiver input is open or short circuit. If all senders attached to the terminal match bus are disabled (high resistance), the receiver will output the logic high level. MAX490 With a low pendulum rate drive, it can reduce EMI and reflection due to improper cable termination, enabling error-free data transmission of up to 2 . 5 Mbps. MAX490 Is a full-duplex transceiver.

Receiver input filtering

When working in the MAX490 in 2 . 5 Mbps mode its receiver also includes the input filtering function in addition to having the input lag.

This filtering function improves the noise suppression ability of differential signals that rise and fall slowly. The filter increases the receiver transmission delay by 25%.

Fail protect

The MAX490 ensures that the receiver output logic high level when the receiver input is short circuit or open circuit, or when all drives attached to the terminal matching

transmission line are disabled. This was achieved by setting the receiver input threshold to -50 mV and -200 mV, respectively. If the differential receiver input voltage (A-B) is greater than or equal to -50 mV, RO is logic high level; if the voltage (A-B) is less than or equal to -200 mV, RO is logic low level.

When all the transmitters attached to the terminal matching bus are disabled, the receiver differential input voltage is pulled to 0V through the terminal resistance.

According to the receiver threshold, a logical high level with a 50 mV minimum noise tolerance can be achieved. Unlike previous failure protection devices, the -50 mV to -200 mV threshold voltage meets the EIA / TIA-485 standard of ± 200 mV

256 transceivers are attached to the bus

The standard RS-485 receiver has an input impedance of 12 k Ω (1 unit load), and the standard driver drives up to 32 unit loads. MAX490 The receiver of the transceiver has a 1 / 8 unit of load input impedance (96 k Ω), allowing up to 256 transceivers to be attached in parallel to the same communication bus. These devices may be combined arbitrarily or with other RS-485 transceivers and may be attached to the same bus as long as the total load does not exceed 32 unit loads.

Reduce EMI and reflection

MAX490 Low pendulum rate drive can reduce the EMI, and reduce the reflection caused by inappropriate terminal matching cable, figure 9 shows the high frequency harmonic element in amplitude is lower than the general case, the drive along the time related to the length of the terminal, the following equation represents the relationship:

$\text{Length} = t_{\text{RISE}} / (10 \times 1.5 \text{ ns/ft})$, t_{RISE} is the drive along the time.

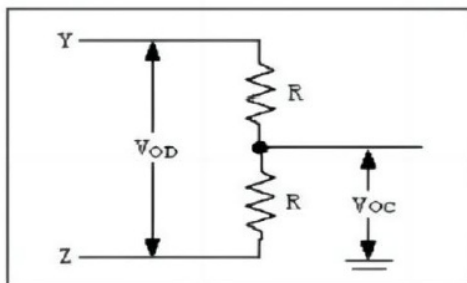


Figure 4: Drive DC test load

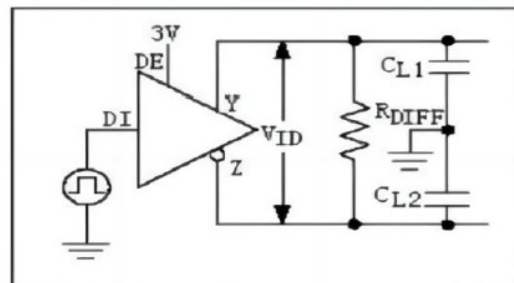


Figure 5: Drive timing test circuit

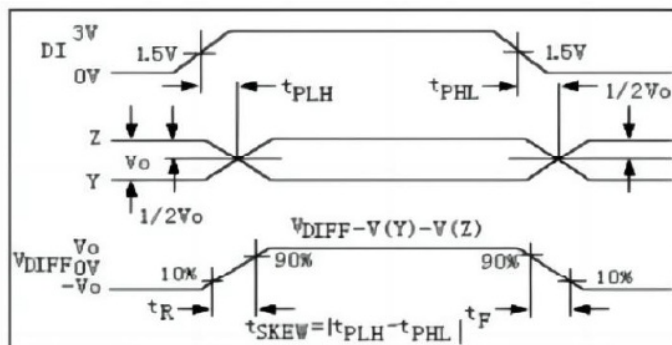


Figure 6: Driver propagation delay

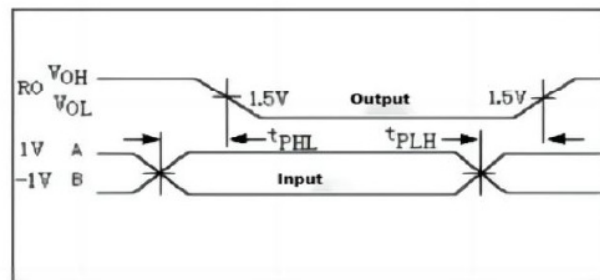


Figure 7: Receiver propagation delay

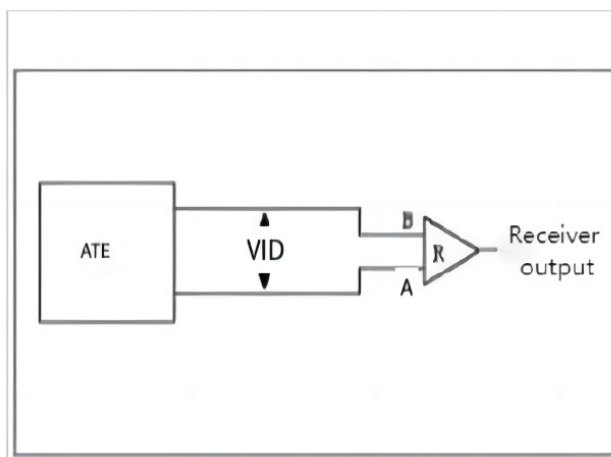


Figure 8: Receiver propagation delay test circuit

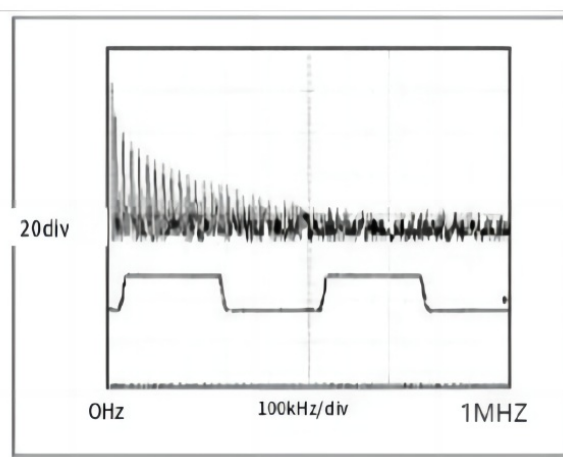


Figure 9: MAX490 driver when transmitting 20kHz signal
FFT diagram of output waveform



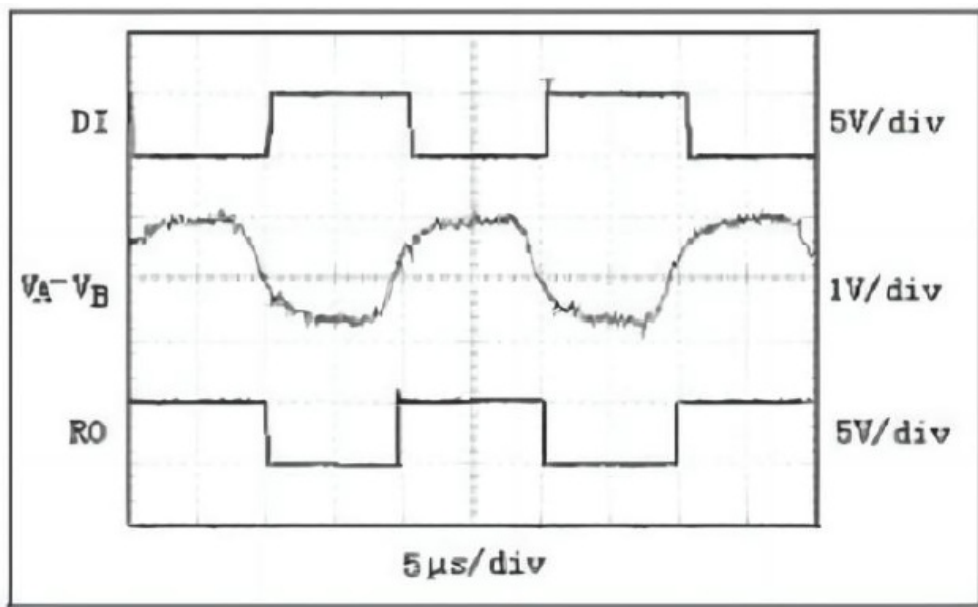


Figure 10: Driving 4000 ft cable at 50kHz MAX490 system differential voltage linear transponder

Package Outline Dimensions

SOP-8

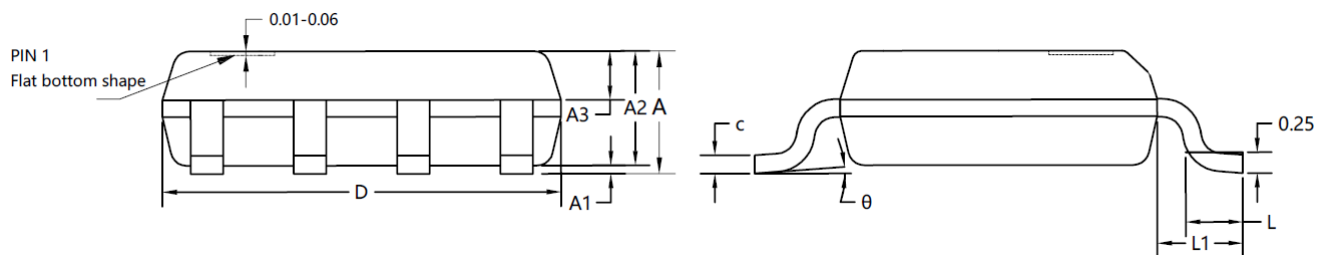


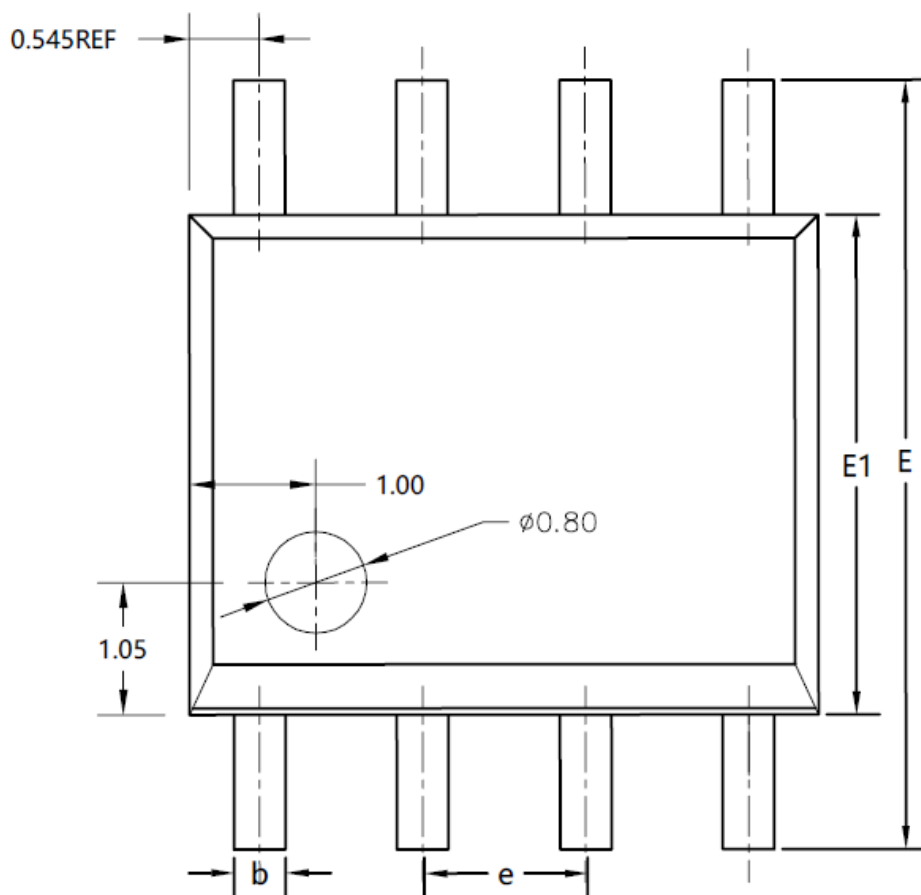

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	1.55	1.65	1.75
A1	0.10	0.15	0.20
A2	1.35	1.45	1.55
A3	0.60	0.70	0.80
b	0.30	0.40	0.50
c	0.17	0.20	0.25
D	4.80	4.90	5.00
E	5.80	6.00	6.20

E1	3.80	3.90	4.00
e	1.27BSC		
L	0.50	0.60	0.70
L1	1.05REF		
	0°	4°	8°

DIP-8

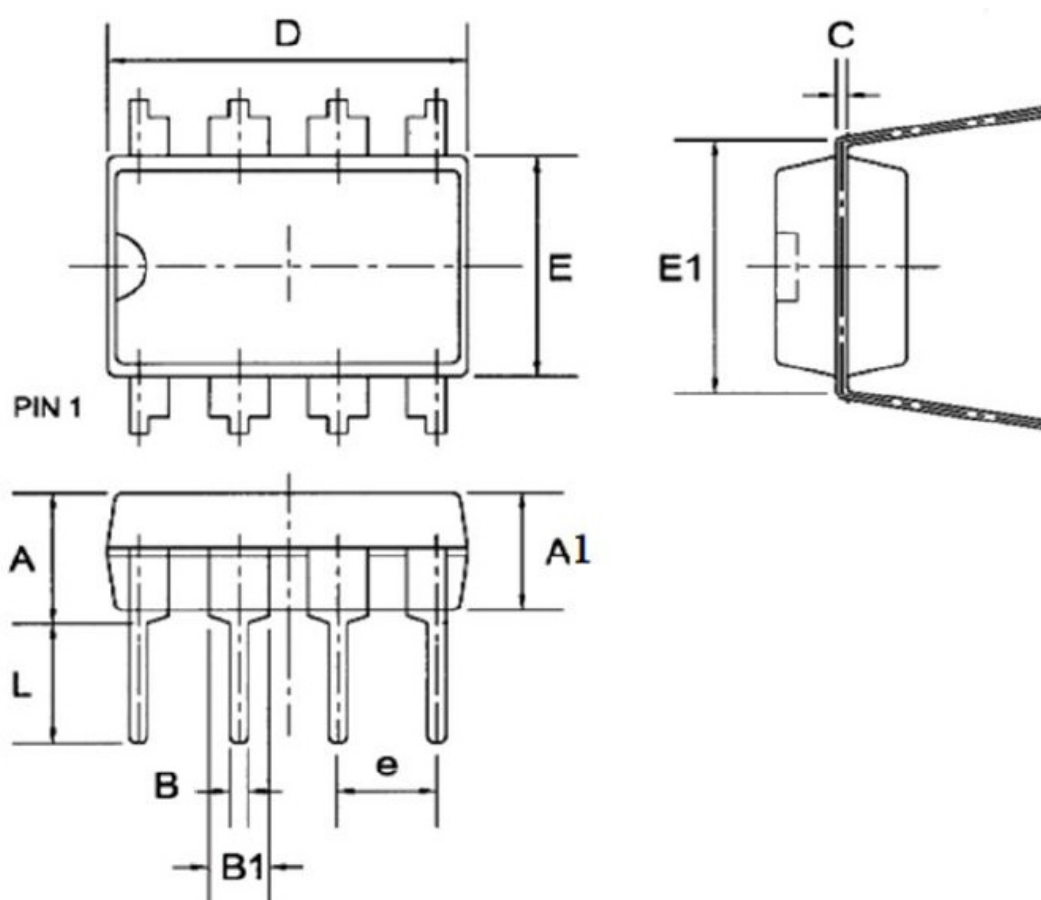

Symbol	Dimensions in Millimeters		
	Min	Nom	Max
A	—	—	4.31
A1	3.15	3.30	3.65

B	0.38	0.46	0.51
B1	1.27	1.55	1.77
C	0.20	0.25	0.30
D	8.95	9.40	9.45
E	6.15	6.20	6.65
E1	—	7.60	—
e	—	2.54	—
L	3.00	3.30	3.60

Statement

- XBLW reserves the right to modify the product manual without prior notice! Before placing an order, customers need to confirm whether the obtained information is the latest version and verify the completeness of the relevant information.
- Any semi-guide product is subject to failure or malfunction under specified conditions. It is the buyer's responsibility to comply with safety standards when using XBLW products for system design and whole machine manufacturing. And take the appropriate safety measures to avoid the potential in the risk of loss of personal injury or loss of property situation!
- XBLW products are not licensed for life support, military, aerospace and other applications, and XBLW will not be responsible for the consequences of the use of products in these fields.
- If any or all XBLW products (including technical data, services) described or contained in this document are subject to any applicable local export control laws and regulations, they may not be exported without an export license from the relevant authorities in accordance with such laws.
- The specifications of any and all XBLW products described or contained in this document specify the performance, characteristics, and functionality of said products in their standalone state, but do not guarantee the performance, characteristics, and

functionality of said products installed in Customer's products or equipment. In order to verify symptoms and conditions that cannot be evaluated in a standalone device, the Customer should ultimately evaluate and test the device installed in the Customer's product device.

- XBLW documentation is only allowed to be copied without any alteration of the content and with the relevant authorization. XBLW assumes no responsibility or liability for altered documents.
- XBLW is committed to becoming the preferred semiconductor brand for customers, and XBLW will strive to provide customers with better performance and better quality products.

www.xinboleic.com

FAQ


- **Q: What is the maximum data transfer rate supported by the MAX490 transceiver?**

A: The MAX490 supports error-free data transfer rates up to 2.5Mbps.

- **Q: How many transmitters and receivers can be attached to the bus?**

A: Up to 256 transmitters and receivers can be attached to the bus.

Documents / Resources

	<p>OLE MAX490 High Speed Transceiver [pdf] Owner's Manual MAX490ESA, MAX490EPA, MAX490 High Speed Transceiver, High Speed Transceiver, Speed Transceiver, Transceiver</p>
---	---

References

- [XBLW - DC-DC, IC, ,](#)
- [User Manual](#)

Related Posts



[ICOM IC-718 Manual TRANSCEIVER Instruction Manual](#)

ICOM IC-718 Manual TRANSCEIVER Instruction Manual



[WIZARD High Speed Dome User Manual](#)

WIZARD High Speed Dome User Manual Model : ON-IP816-20X-5M 20X 5MP H.265 IP IR High Speed Dome 7"...



[wouxun Professional Mobile Transceiver User Manual](#)

Professional Mobile Transceiver



[ICOM IC-718 TRANSCEIVER Instruction Manual](#)

ICOM IC-718 TRANSCEIVER Instruction Manual

OLE

High Speed Transceiver, MAX490 High Speed Transceiver, MAX490EPA, MAX490ESA, OLE, Speed Transceiver, Transceiver

—Previous Post

[OLE SN74LVC1G04 Single Inverter Gate Owner's Manual](#)

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.