


W082098A

WORKPRO

OPERATOR'S MANUAL 4-TIER HEAVY DUTY STEEL GARAGE STORAGE SHELVING 68"W x 24"D x 65"H

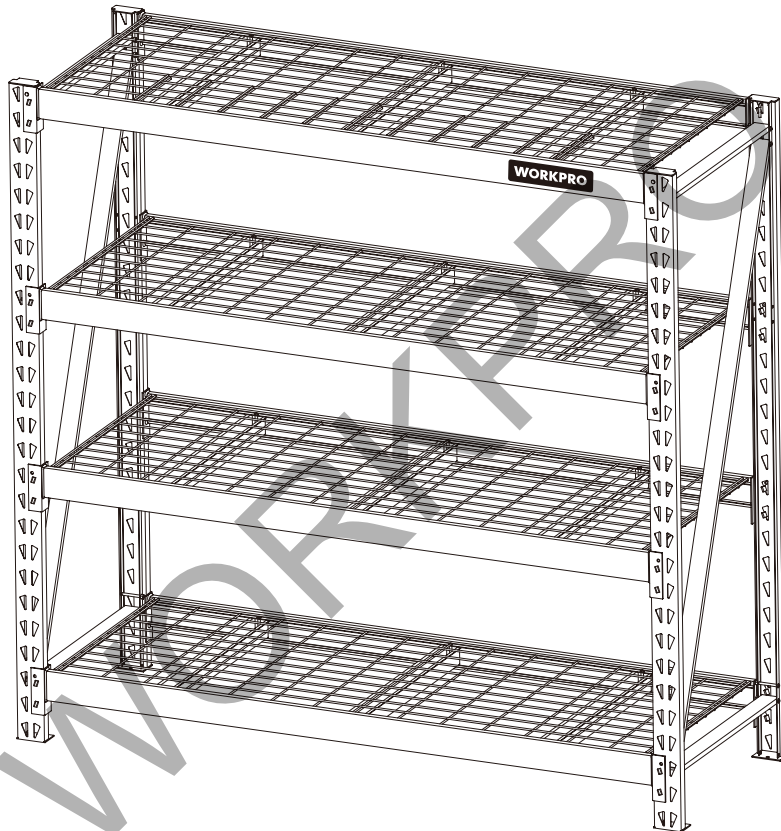

Scan the QR code to get the
installation video of workbench.
Can't connect? Need help?
Email: service@greatstartools.com
Call: 877-876-7562



USE PRECAUTION
For your safety



INSTRUCTION
MANUAL
Read and understand



EYE PROTECTION
Must be worn



PROTECTIVE GLOVES
Must be worn when
assembly



CAUTION:

Read and follow all Safety Rules and Operating instructions before first use of this product.
Save this manual for future reference.



Distributed by:
GREATSTAR Industrial USA, LLC
9836 Northcross Center Court, Suite A,
Huntersville NC 28078, USA
www.greatstartools.com
MADE IN VIETNAM

TABLE OF CONTENTS

Safety Information-----	2
Specifications -----	2
Package Contents -----	3
Pre-installation -----	4-5
Assembly -----	6-12
Cleaning and Maintenance -----	12
Customer Service -----	12

FOR YOUR SAFETY: CAREFULLY READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE USE.

SAFETY INFORMATION

To reduce the risk of serious injury, read and follow the safety instructions below before assembling and using this product.

CAUTION!

- Do not exceed 1800lbs (816.5kgs) per shelf of evenly distributed weight. Do not exceed 7200lbs (3265.9kgs) for the entire unit of evenly distributed weight. Be aware of dynamic loading! Sudden load movement may briefly create excess load causing product failure.
- Evenly distribute the weight on each shelf, and keep the heaviest loads on the bottom shelf and small lighter items on the upper level.
- Use only on flat, level and hard surface capable of supporting the shelving and any items placed on it.
- Maintain proper footing and balance at all times.
- Keep bystanders out of the area during assembly.
- This product is not a toy. Do not allow children to play with, on or near the unit during installation.
- To prevent tipping, always secure to a wall or floor with suitable fasteners (not included).

WARNING!


- DO NOT CLIMB, STAND OR USE THIS UNIT AS A LADDER.
- DO NOT MOUNT CASTERS TO THIS UNIT.
- DO NOT USE THIS UNIT TO STORE AQUARIUMS.
- Use care when handling and assembling metal plates.
- The metal may have sharp edges or corners. The use of protective gloves is recommended.
- Always remember to use proper lifting techniques when moving the boxed or assembled unit.





SPECIFICATIONS

Maximum Load Capacity of Total Shelf (evenly distributed)	7200 lbs (3265.9kgs)
Maximum Load Capacity of Each Shelf (evenly distributed)	1800 lbs (816.5kgs)

PACKAGE CONTENTS



Ensure all components are present. If any components are missing, do not proceed with assembly. Please send an email to service@greatstartools.com or call 877- 876-7562.

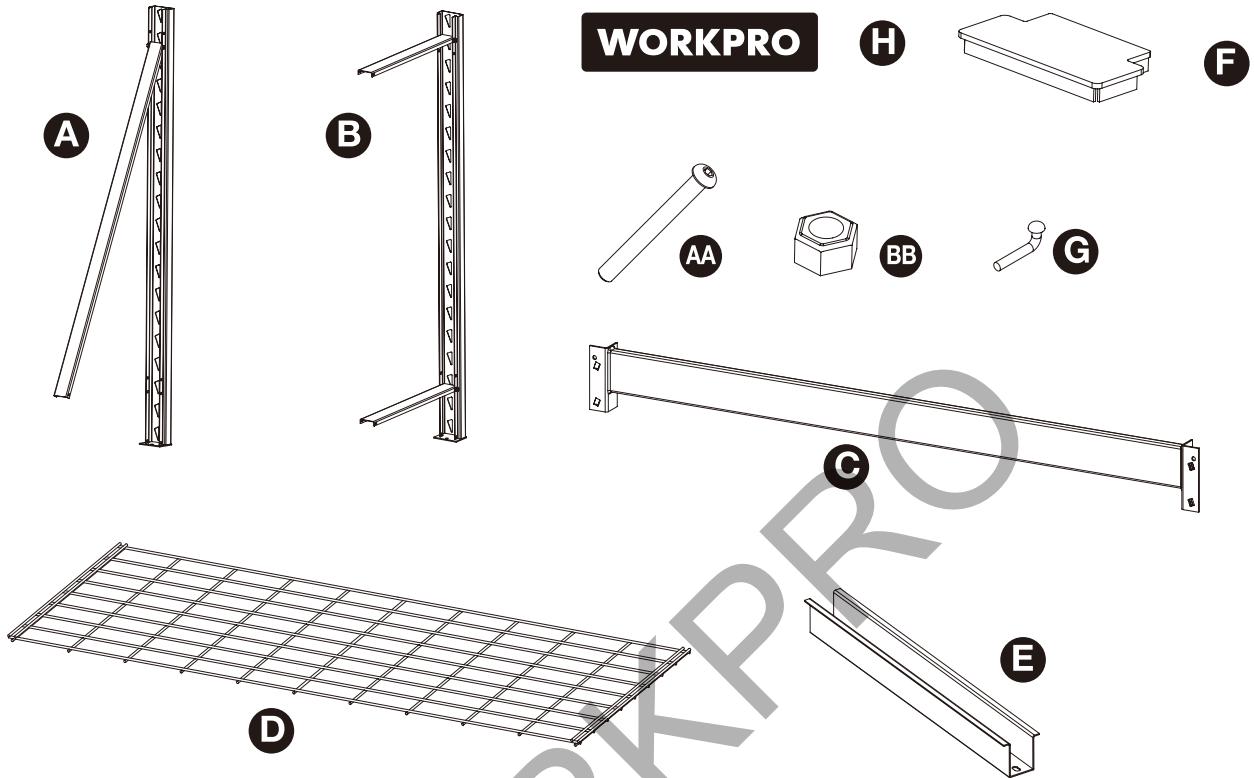



PART	DESCRIPTION	QTY	TOOLS REQUIRED (INCLUDED):
A	Post with a Diagonal Brace Pre-assembled	2	 10mm Wrench  4mm Hex Key
B	Post with Two Horizontal Braces Pre-assembled	2	
C	Beam	8	
D	Wire Shelf	4	
E	Shelf Support	12	
F	Top Protective Cover	4	TOOLS REQUIRED (NOT INCLUDED):  Rubber Mallet  Protective Gloves
G	Locking Shelf Pin	16	
H	Signature Sticker	1	
AA	M6 x 55mm Inner Hexagonal at Head Bolt	30+2(spare)	
BB	M6 Nut	30+2(spare)	

PRE-INSTALLATION

- Identify carefully the installation direction of the accessories.
- Assembly of this unit is done by fitting the locking tabs of the beams (C) into the slots of the posts (A,B) with the narrow end of the teardrop-shaped post slots facing down and the locking pin hole on top (Fig.1).
- The height of each layer can be selected and adjusted according to your needs or desired.
- Two extra metal wires of each shelf must be on top (Fig.2).
- The bottom shelf assembly should be installed into the second and third teardrop-shaped slots at the bottom of posts.
- The top shelf assembly should be installed into the first and second teardrop-shaped slots at the top of posts.
- A rubber mallet may be used to tap down on the top of beams to properly seat the locking tabs into the narrow end of the teardrop-shaped slots (Fig.3).
- A visual inspection should be made to ensure that the locking tabs are properly engaged into the teardrop-shaped slots.
- The attached signature sticker label can be affixed on any beam(C) as you like (Fig.4).

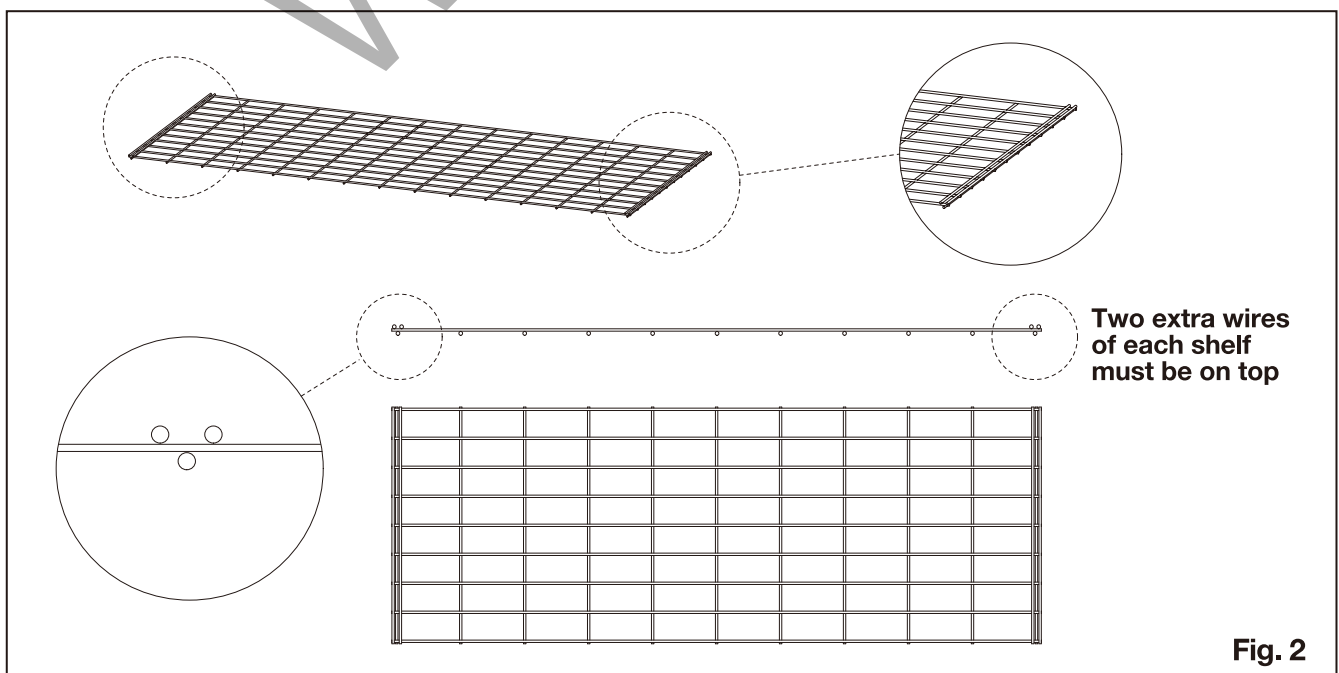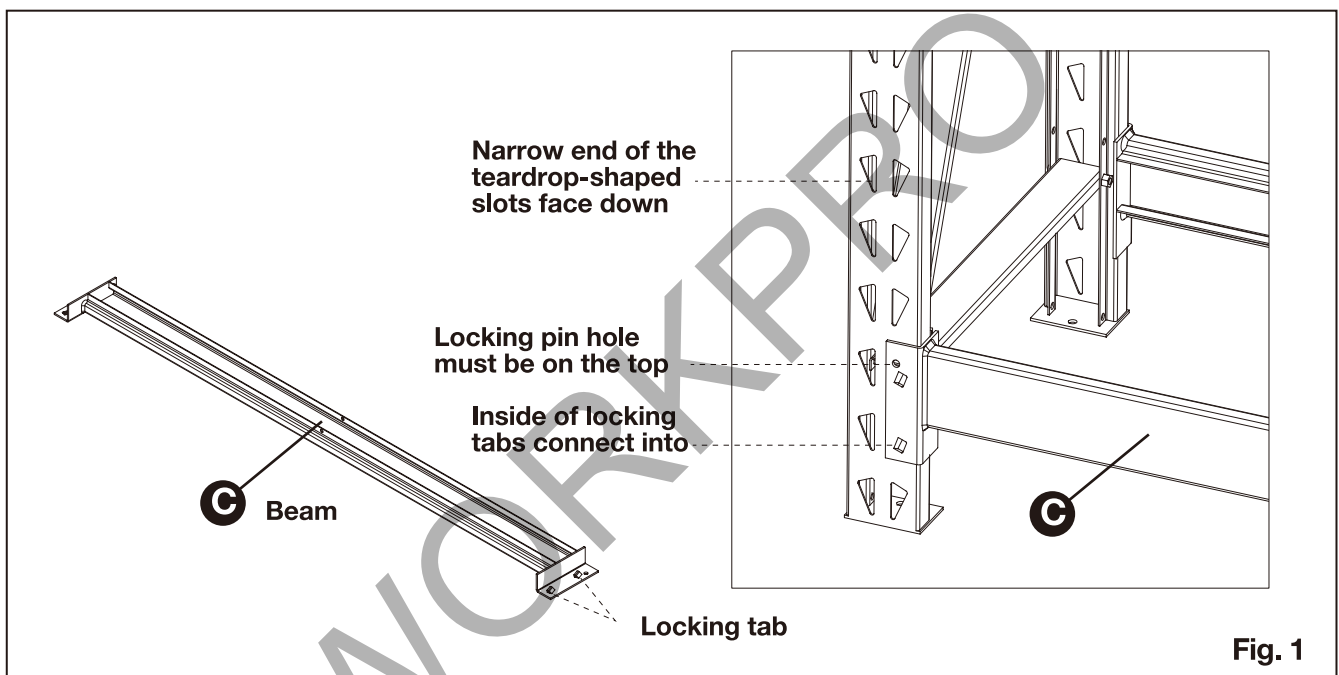


PRE-INSTALLATION

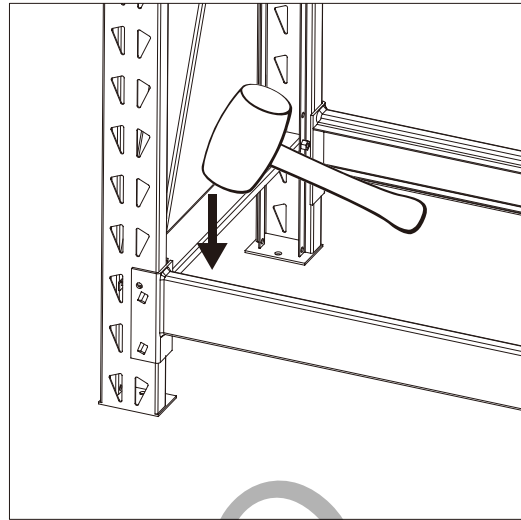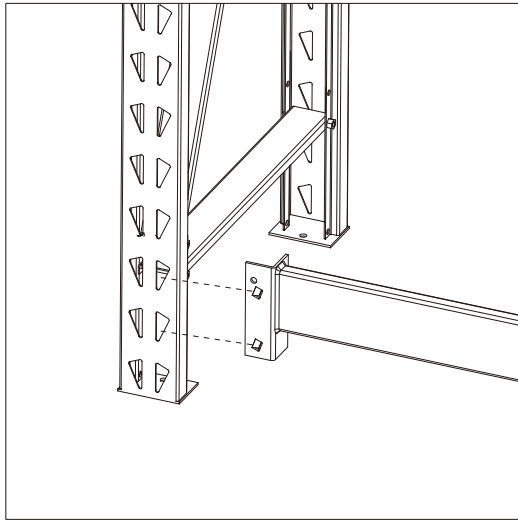

Locking tabs should be seated properly into the teardrop-shaped slots

Fig. 3

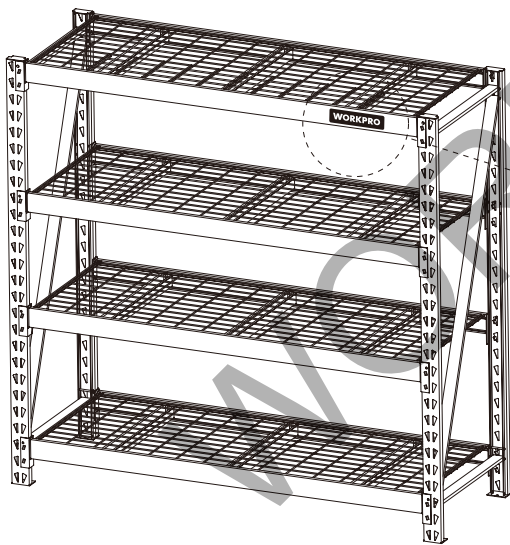

WORKPRO

The attached signature sticker label
can be affixed on any beam as you like

Fig. 4

ASSEMBLY

i NOTE:

- Assemble on a flat surface. A piece of cardboard is recommended to keep the product from being scratched during assembly.
- Two people are recommended for assembly.

STEP 1: POSTS ASSEMBLY

i NOTE:

- For ease of assembly, two (2) posts feature pre-bolted two horizontal braces, and another two posts feature pre-bolted a diagonal brace.

- Place one post with a diagonal brace pre-assembled (A) and one post with two horizontal braces pre-assembled (B) on the floor, parallel to one another (about 24"/61cm apart). The narrow end of the teardrop-shaped slots on each post should be facing down.
- Take the free end of diagonal brace out from the post (A), and insert it into the post with two horizontal braces pre-assembled (B). Align the holes, attach them with a M6 x 55mm inner hexagonal at head bolt (AA) and a M6 nut, then tighten with supplied 4mm hex key and 10mm wrench. Do not fully tighten the bolt yet.
- Swing out the bottom horizontal brace and top horizontal brace of the post (B), and insert them into the post with a diagonal brace pre-assembled (A). Align the holes, attach them with two M6 x 55mm inner hexagonal at head bolts (AA) and two M6 nuts (BB), then tighten with supplied 4mm hex key and 10mm wrench. Do not fully tighten the bolt yet.
- Repeat the above steps to assemble the second upright frame. Once both are assembled, fully tighten the bolts on all corners. Be careful not to over-tighten the bolts.

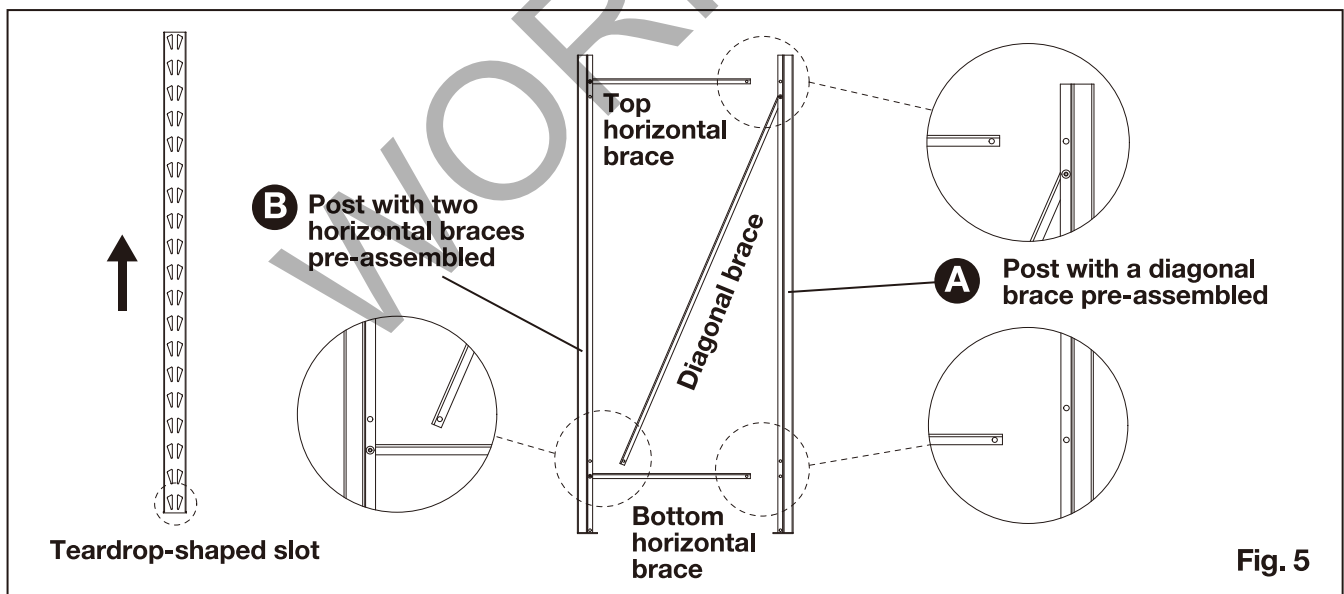


Fig. 5

PART	A	B	AA	BB
DESCRIPTION	Post with a diagonal brace pre-assembled	Post with two horizontal braces pre-assembled	M6 x 55mm inner hexagonal at head bolt	M6 nut
QTY	2	2	6	6

ASSEMBLY

STEP 2: BEAMS FOR FIRST LEVEL ASSEMBLY

NOTE:

It is recommended for one person to hold the upright frames in place while a second person installs the beams.

- Position the two post frames vertical with the foot end of each frame at ground level. There is a set of locking tabs at both ends of every beam (C).
- Slide properly the locking tabs of beam (C) into two slots of the posts (A/B) with the narrow end of the teardrop-shaped slots facing down and the locking pin hole on top. Tap downward lightly to seat tabs. Make sure the end of the beam is flush against the upright frame.
- Repeat the previous step to install the beam on the opposite side for the first level. Make sure both beams (C) are at the same level.

NOTE:

- Make sure all the locking tabs are fully seated into the post slots. You may use a rubber mallet (not included) for achieving this target. This applies to all the locking tabs used in this unit.
- The beam (C) and locking tabs should easily slip into place. If not, recheck the alignment. Too much force may damage the interlock between the beam and post.

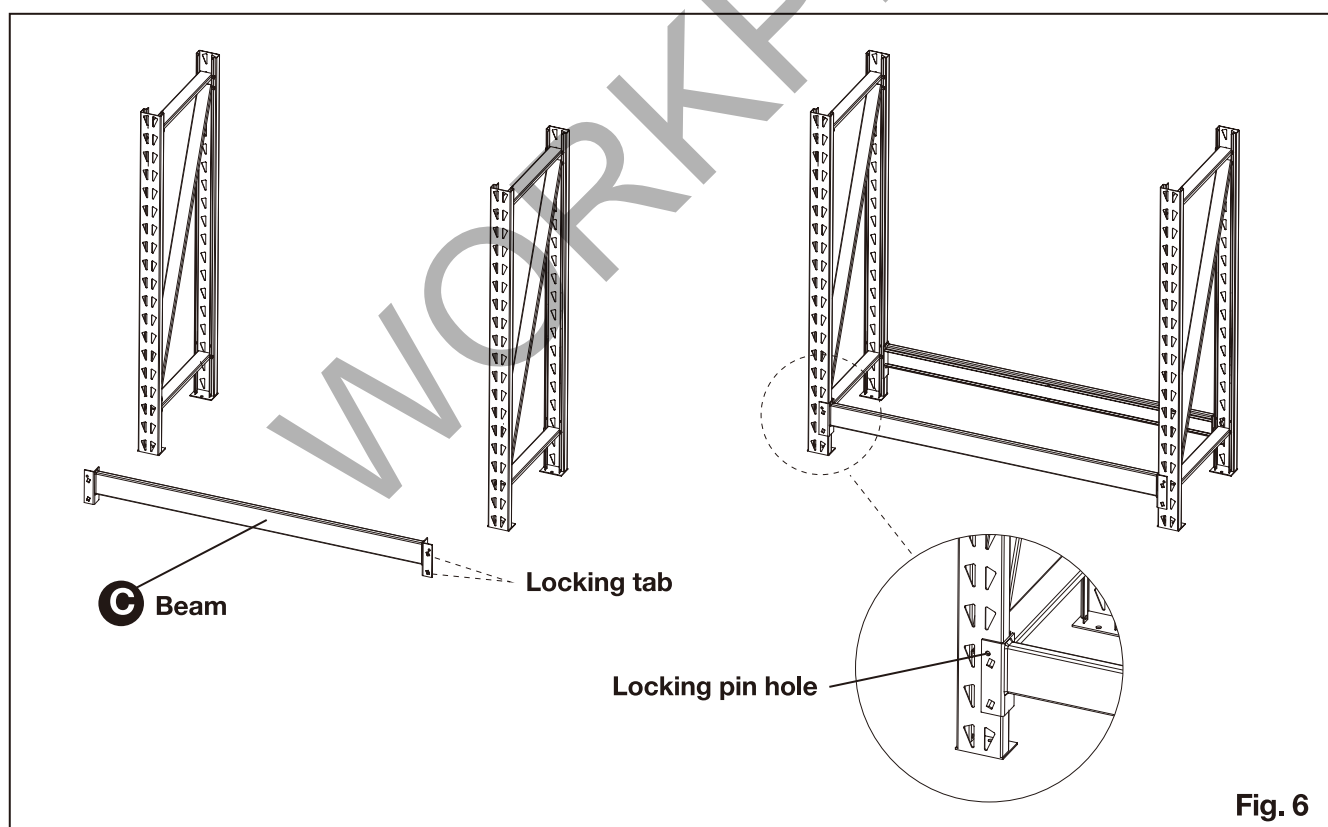


Fig. 6

PART	A	B	C
DESCRIPTION	Post with a diagonal brace pre-assembled	Post with two horizontal braces pre-assembled	Beam
QTY	2	2	2

ASSEMBLY

STEP 3: BEAMS FOR SECOND TO FOURTH LEVEL ASSEMBLY

Repeat the previous step 2 to install the second to fourth level.



NOTE:

The beams (C) on the same level should be at the same height. You can adjust to the same height by counting the number of holes.

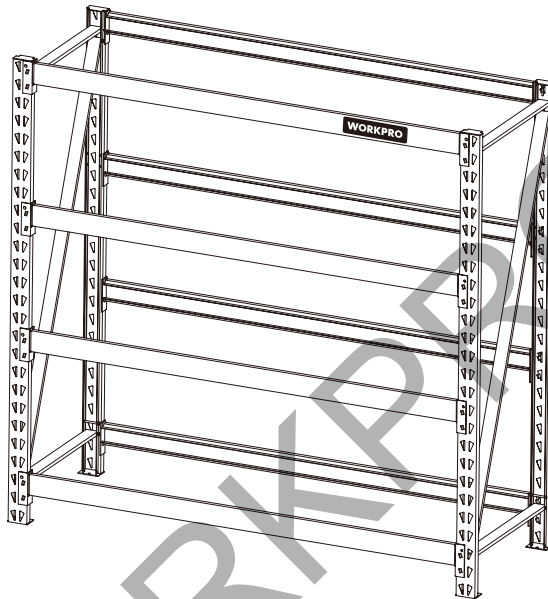


Fig. 7

PART	A	B	C
DESCRIPTION	Post with a diagonal brace pre-assembled	Post with two horizontal braces pre-assembled	Beam
QTY	2	2	6

ASSEMBLY

STEP 4: SHELF SUPPORTS ASSEMBLY

- Align the holes, attach the shelf supports (E) to the beams (C) with six M6 x 55mm inner hexagonal at head bolts (AA) and six M6 nuts for each shelf (totally 24 bolts and 24 nuts), then tighten with supplied 4mm hex key and 10mm wrench.

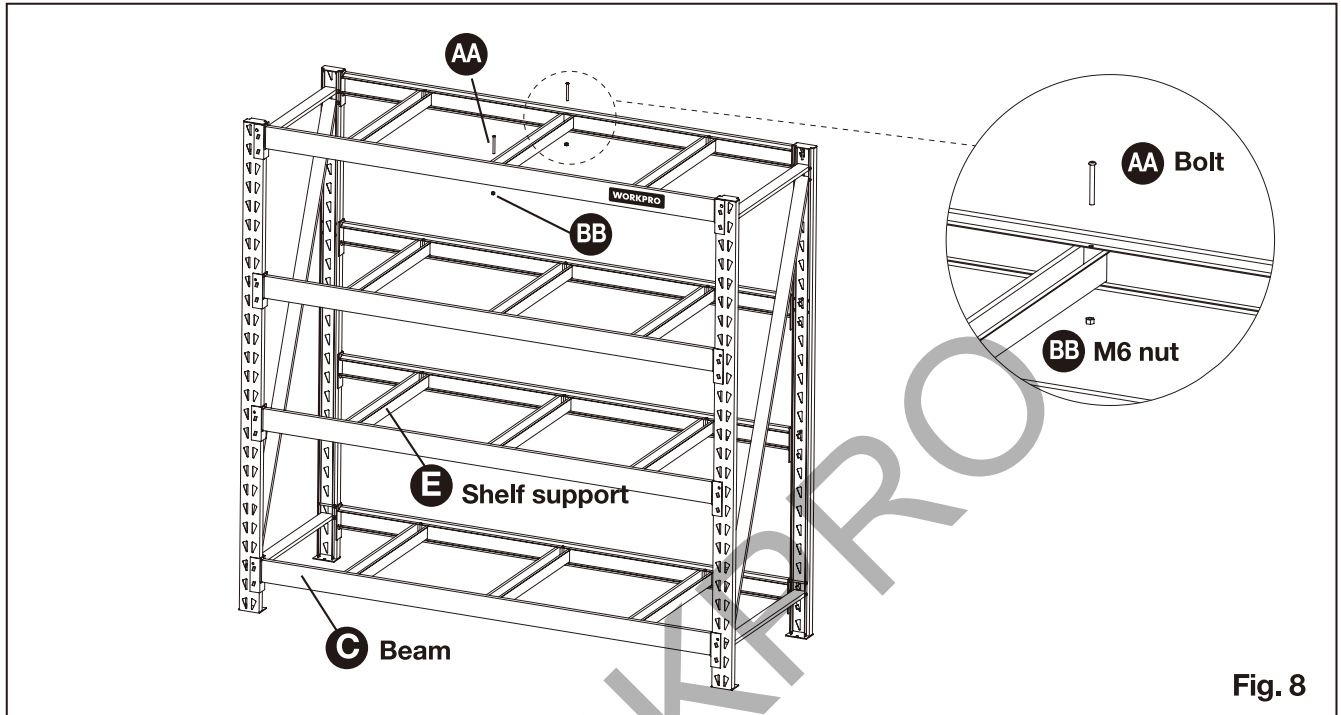


Fig. 8

PART	E	AA	BB
DESCRIPTION	Shelf support	M6 x 55mm inner hexagonal at head bolt	M6 nut
QTY	12	24	24

ASSEMBLY

STEP 5: WIRE SHELF ASSEMBLY

- Place four wire shelves (D) onto each previously assembled level on the frame. Make sure two extra wires of each shelf must be on top.

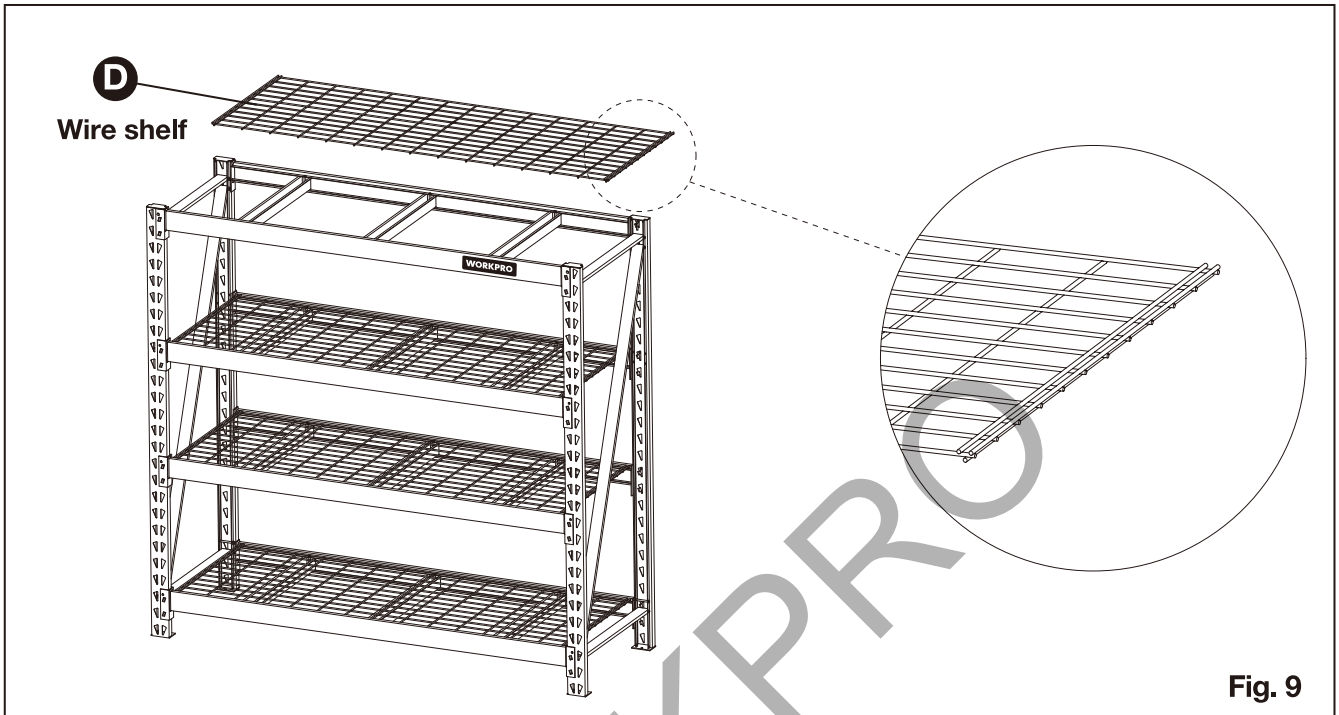


Fig. 9

PART	D
DESCRIPTION	Wire shelf
QTY	4


ASSEMBLY

STEP 6: SHELF SUPPORTS ASSEMBLY

- Insert sixteen locking shelf pins (G) into the locking pin hole at both ends of every beam (C).

NOTE:

- If a locking shelf pin does not easily slip into place, moderately tap the end of the beam (closest to the upright frame) to fully seat the locking tabs.

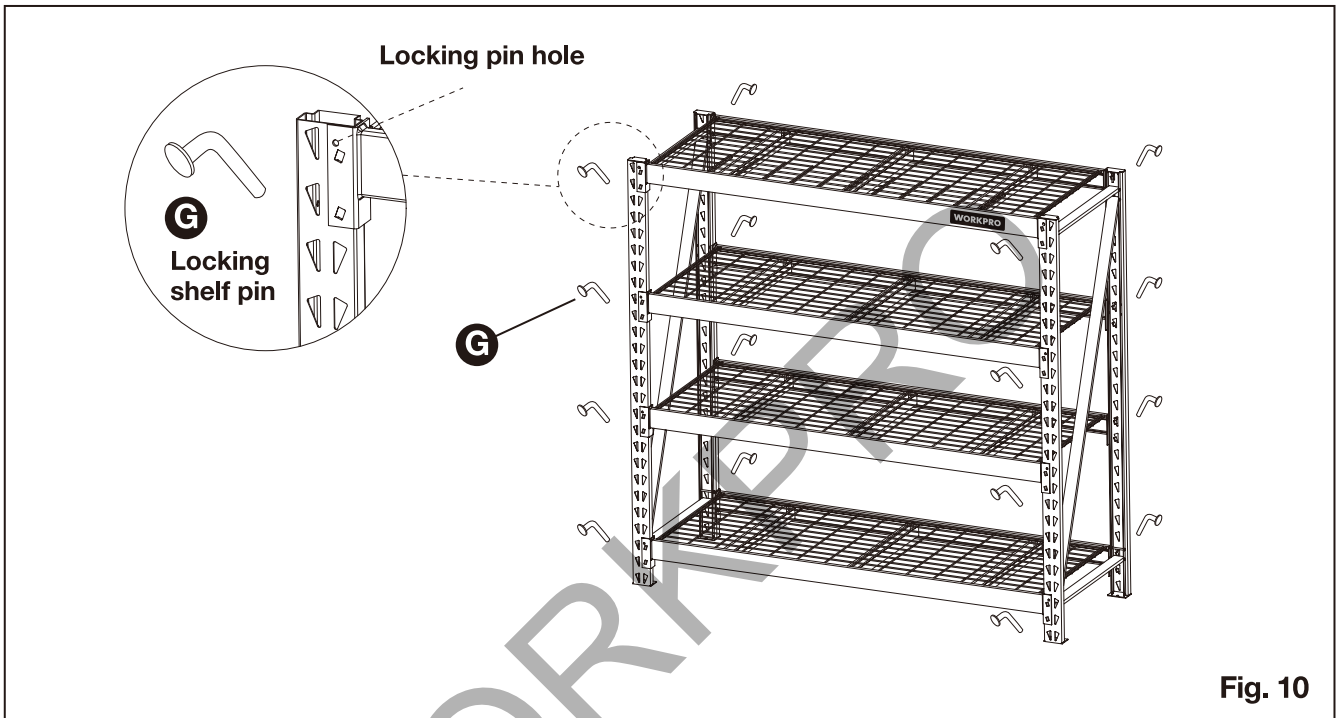


PART	G
DESCRIPTION	Locking shelf pin
QTY	16

ASSEMBLY

STEP 7: TOP PROTECTIVE COVER ASSEMBLY

- Place four top protective cover (F) on each post and tap downward lightly to seat the covers.

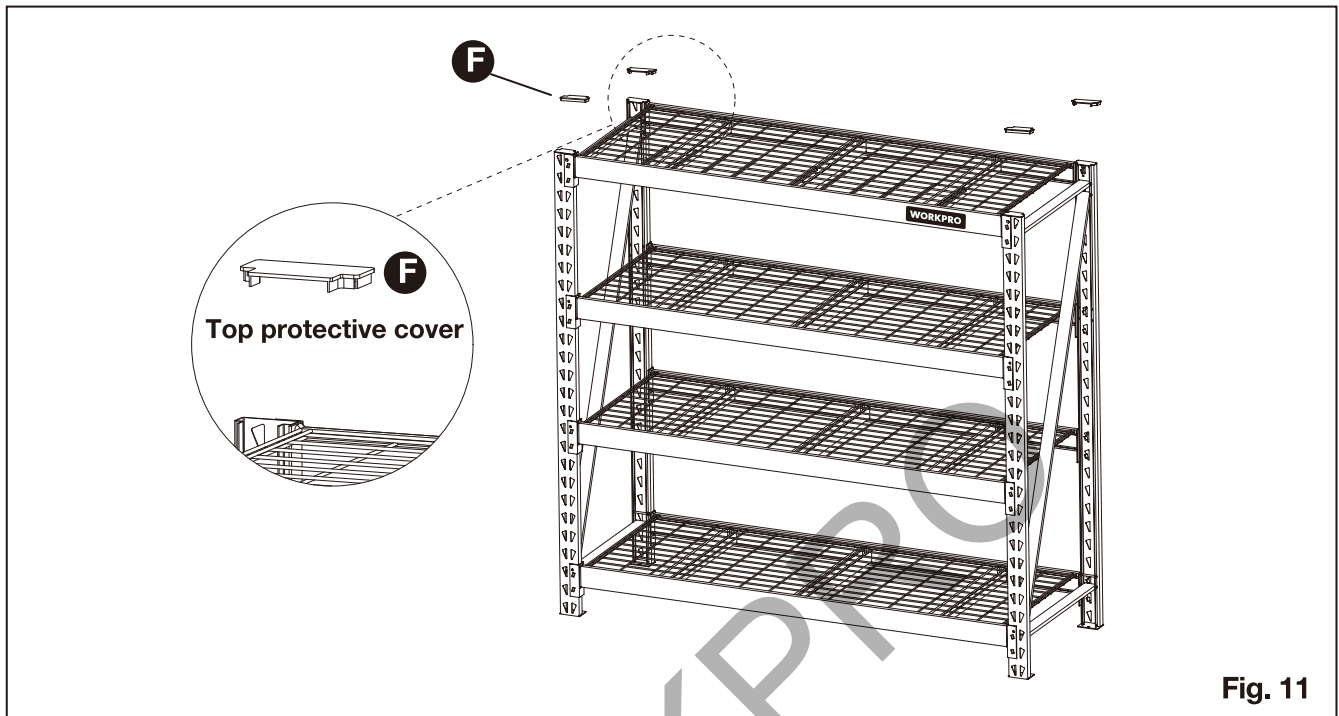

PART	F
DESCRIPTION	Top protective cover
QTY	4

CLEANING AND MAINTENANCE

- Wipe with a dry cloth as needed to remove dust and dirt.
- Avoid contact with corrosive substances like acids, alkaline or similar substances.

CUSTOMER SERVICE

If you are having difficulty in using this product and require support, please send an email to service@greatstartools.com or call 877-876-7562.