


RICHTEK 2510GQV-QA(2) Evaluation Board



RICHTEK 2510GQV-QA(2) Evaluation Board User Manual


[Home](#) » [RICHTEK](#) » RICHTEK 2510GQV-QA(2) Evaluation Board User Manual 

Contents

- 1 RICHTEK 2510GQV-QA(2) Evaluation Board
- 2 Product Information
- 3 Product Usage Instructions
- 4 Performance Specification Summary
 - 4.1 Power-up Procedure
- 5 Detailed Description of Hardware
- 6 Typical Applications
- 7 Evaluation Board Layout
- 8 More Information
- 9 Documents / Resources
 - 9.1 References

RICHTEK

RICHTEK 2510GQV-QA(2) Evaluation Board

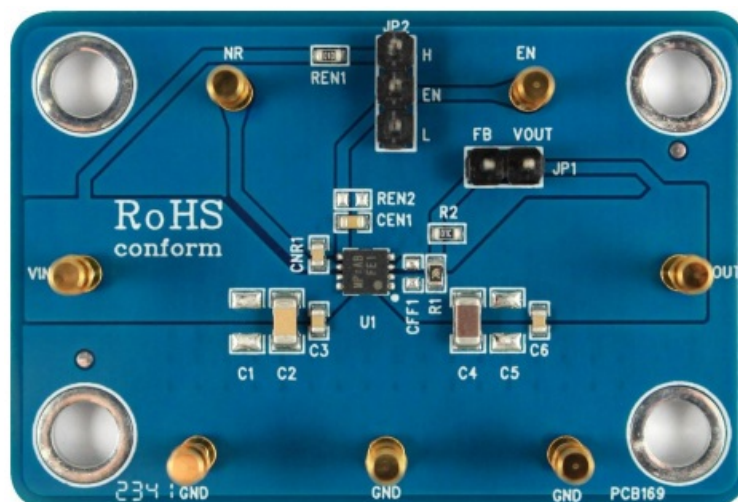

Product Information

Specifications

Specification	Test Conditions	Min	Typ	Max	Unit
Input Voltage Range		2.2	3.8	6	V
Output Current		0	—	1	A
Output Voltage Range		0.8	3.3	5.5	V

Product Usage Instructions

Power-up Procedure

Suggested Equipment:

- RTQ2510-QA Evaluation Board
- DC power supply capable of at least 6V and 1A
- Electronic load capable of 1A
- Function Generator
- Oscilloscope

Quick Start Procedures:

1. With power off, connect the input power supply to VIN and GND pins.
2. With power off, connect the electronic load between the VOUT and nearest GND pins.
3. Turn on the power supply at the input. Ensure the input voltage does not exceed 6V on the Evaluation Board.
4. Check the output voltage using a voltmeter.
5. Adjust the load within operating ranges and observe output voltage regulation, quiescent current, dropout voltage, PSRR, noise, and other performance.

Detailed Description of Hardware

Headers Description and Placement

Carefully inspect all components used in the EVB according to the Bill of Materials table. Ensure all components are undamaged and correctly installed.

Test Points

The EVB is equipped with test points and pin names as listed in the documentation.

FAQ (Frequently Asked Questions)

1A, Low Noise, High PSRR, Low-Dropout Linear Regulator

General Description

The Evaluation Board user guide describes the operational use of the RTQ2510-QA evaluation board as a reference design for demonstration and evaluation of the RTQ2510-QA, a low noise, high PSRR, low-dropout (LDO) linear regulator. Included in this user guide are setup and operating instructions, thermal and layout guidelines, a printed circuit

board (PCB) layout, a schematic diagram, and a bill of materials (BOM). For more detail information, please refer to the RTQ2510-QA datasheet.

Performance Specification Summary

Summary of the RTQ2510-QA Evaluation Board performance specifiaiton is provided in Table 1. The ambient temperature is 25°C.

Table 1. RTQ2510-QA Evaluation Board Performance Specification Summary

Specification	Test Conditions		Min	Typ	Max	Unit
Input Voltage Range			2.2	3.8	6	V
Output Current			0	—	1	A
Output Voltage Range			0.8	3.3	5.5	V
Line Regulation	$V_{OUT} + 0.5V \leq V_{IN} \leq 6V, V_{IN} \geq 2.2V, I_{OUT} = 100mA$		—	0.2	—	%
Load Regulation	$100mA \leq I_{OUT} \leq 1A$		—	0.3	—	%
Dropout Voltage	$V_{OUT} + 0.5V \leq V_{IN} \leq 6V, V_{FB} = 0V$	$V_{IN} \geq 2.2V, I_{OUT} = 500mA$	—	—	160	mV
		$V_{IN} \geq 2.5V, I_{OUT} = 750mA$	—	—	210	mV
		$V_{IN} \geq 2.5V, I_{OUT} = 1A$	—	—	370	mV

Power-up Procedure

Suggestion Required Equipments

- RTQ2510-QA Evaluation Board
- DC power supply capable of at least 6V and 1A
- Electronic load capable of 1A
- Function Generator
- Oscilloscope

Quick Start Procedures

The Evaluation Board is fully assembled and tested. Follow the steps below to verify board operation. Do not turn on supplies until all connections are made. When measuring the output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the output voltage ripple by touching the probe tip and grounding directly across the last output capacitor.


Proper measurement equipment setup and follow the procedure below.

1. With power off, connect the input power supply to VIN and GND pins.
2. With power off, connect the electronic load between the VOUT and nearest GND pins.
3. Turn on the power supply at the input. Make sure that the input voltage does not exceeds 6V on the Evaluation Board.
4. Check for the proper output voltage using a voltmeter.
5. Once the proper output voltage is established, adjust the load within the operating ranges and observe the

output voltage regulation, quiescent current, dropout voltage, PSRR, noise and other performance.

Detailed Description of Hardware

Headers Description and Placement

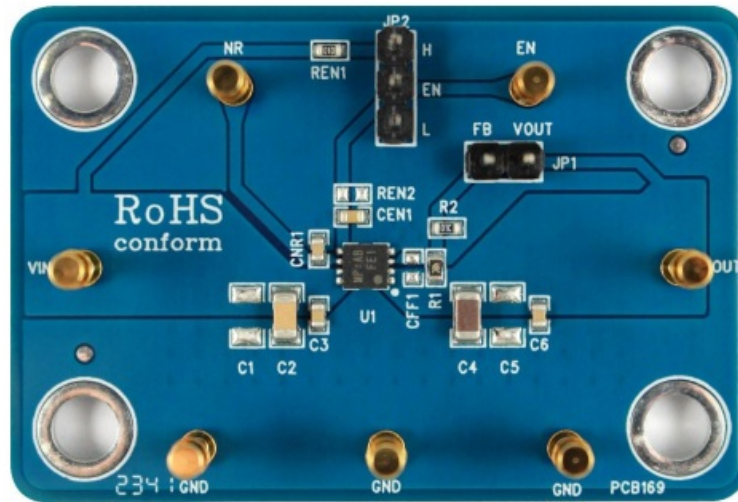

Carefully inspect all the components used in the EVB according to the following Bill of Materials table, and then make sure all the components are undamaged and correctly installed. If there is any missing or damaged component, which may occur during transportation, please contact our distributors or e-mail us at evb_service@richtek.com.

Test Points

The EVB is provided with the test points and pin names listed in the table below.


Test Point/ Pin Name	Function
VIN	Supply input pin.
VOUT	Output of the regulator.
EN	Enable sense pin.
GND	System ground pin.
JP1	Provide connection between VOUT and FB pin.
JP2	User can decide EN pin connected to high or low.

Bill of Materials

VIN = 2.2V to 6V, VOUT = 0.8V to 5.5V, IOUT = 1A						
Reference	Count	Part Number	Value	Description	Package	Manufacturer
U1	1	RTQ2510GQV-QA(2)	RTQ2510GQV-QA(2)	LDO	VDFN-8L 3x3	RICHTEK
C2	1	1206B105K500CT	1 μ F	Capacitor, Ceramic, 50V, X7R	1206	WALSIN
C3, C6, CEN1	3	0603B104K500CT	0.1 μ F	Capacitor, Ceramic, 50V, X7R	0603	WALSIN
C4	1	GRM31CR71H475KA12L	4.7 μ F	Capacitor, Ceramic, 50V, X7R	1206	TAIYO YUDEN
CNR1	1	0603B103K500CT	10nF	Capacitor, Ceramic, 50V, X7R	0603	WALSIN
R1	1	CR0603F30K9P05	30.9k	Resistor, Chip	0603	EVER OHMS
R2	1	WR06X1002FTL	10k	Resistor, Chip	0603	WALSIN
REN1	1	WR06X1003FTL	100k	Resistor, Chip	0603	WALSIN

Typical Applications


EVB Schematic Diagram

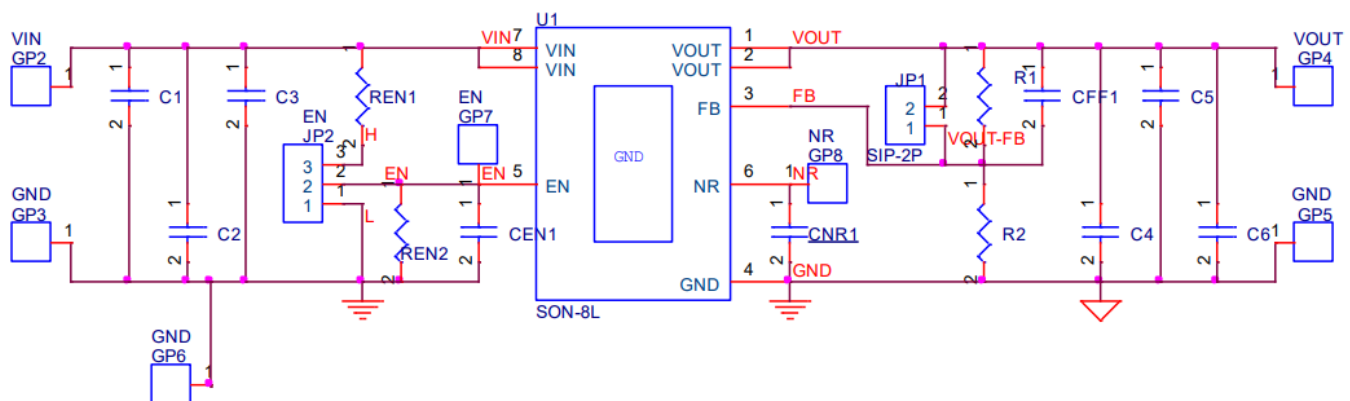


1. The capacitance values of the input and output capacitors will influence the input and output voltage ripple.
2. MLCC capacitors have degrading capacitance at DC bias voltage, and especially smaller size MLCC capacitors will have much lower capacitance.

Measure Result


Power On from EN

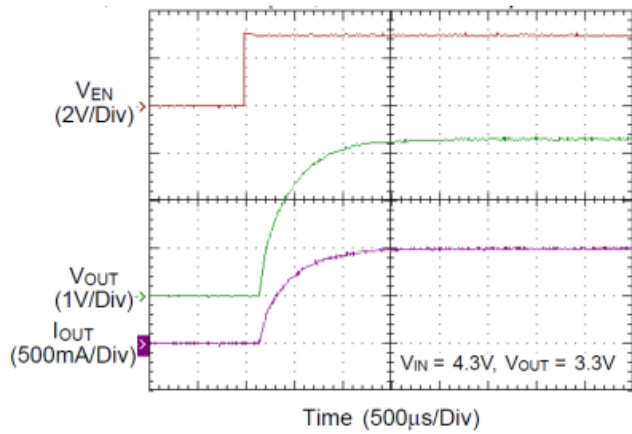


Power Off from EN

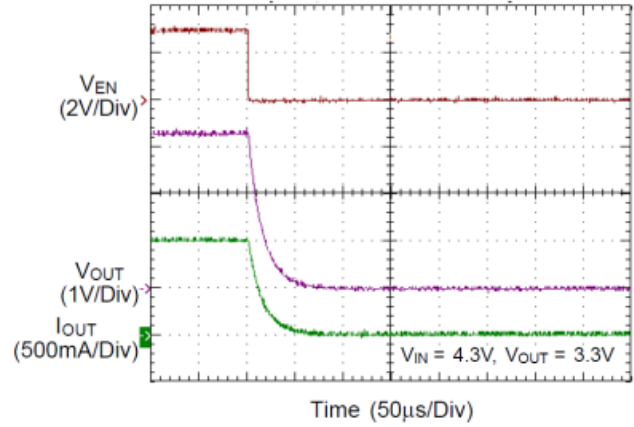


Dropout Voltage vs. Output Current

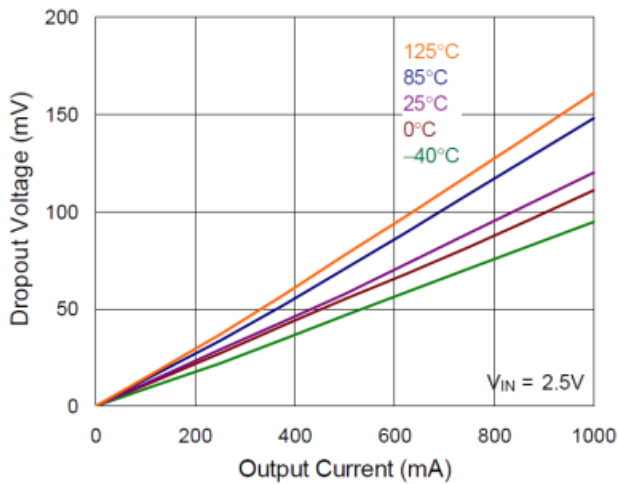


PSRR vs. Frequency

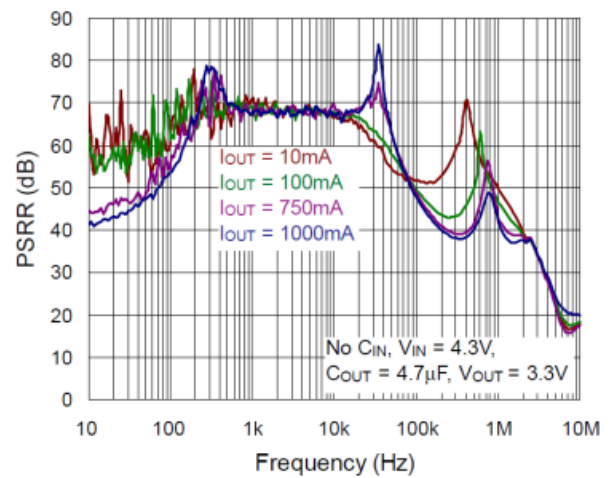


Output Spectral Noise Density

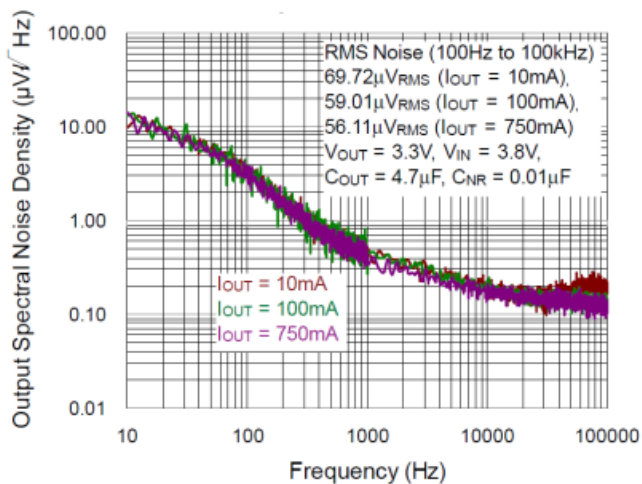

Load Transient Response

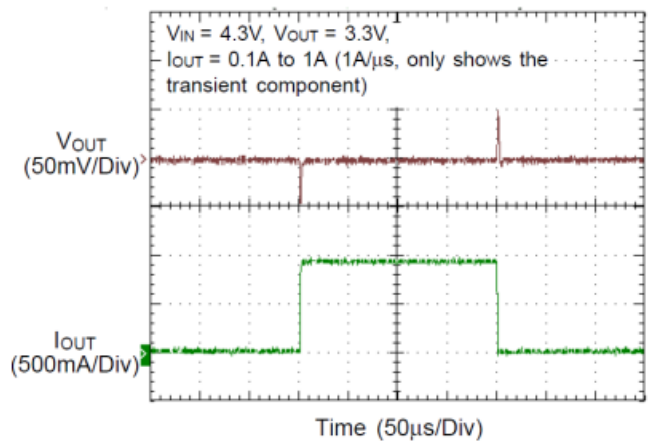

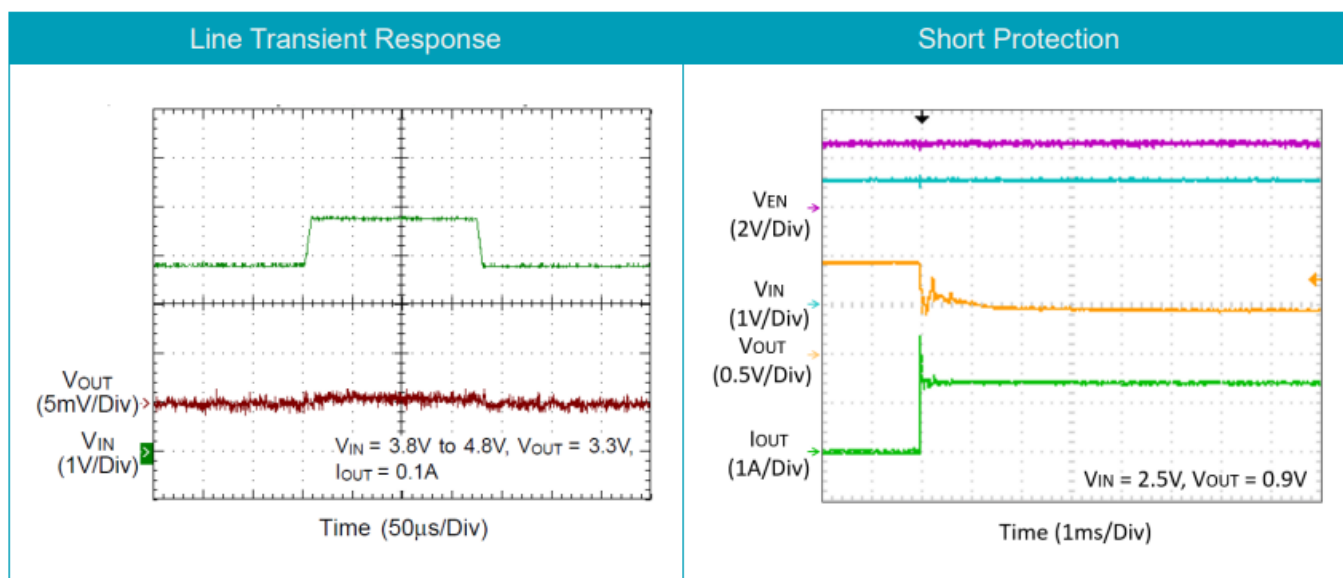

NOTE

1. When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the output voltage ripple by touching the probe tip directly across the output capacitor.
2. The C4 component manufacturer used for these measurements is MURATA.

Evaluation Board Layout

Figure 1 and Figure 2 are RTQ2510 Evaluation Board layout. This board is constructed on two-layer PCB, outer layers with 1 oz. Cu and inner layers with 1 oz. Cu.

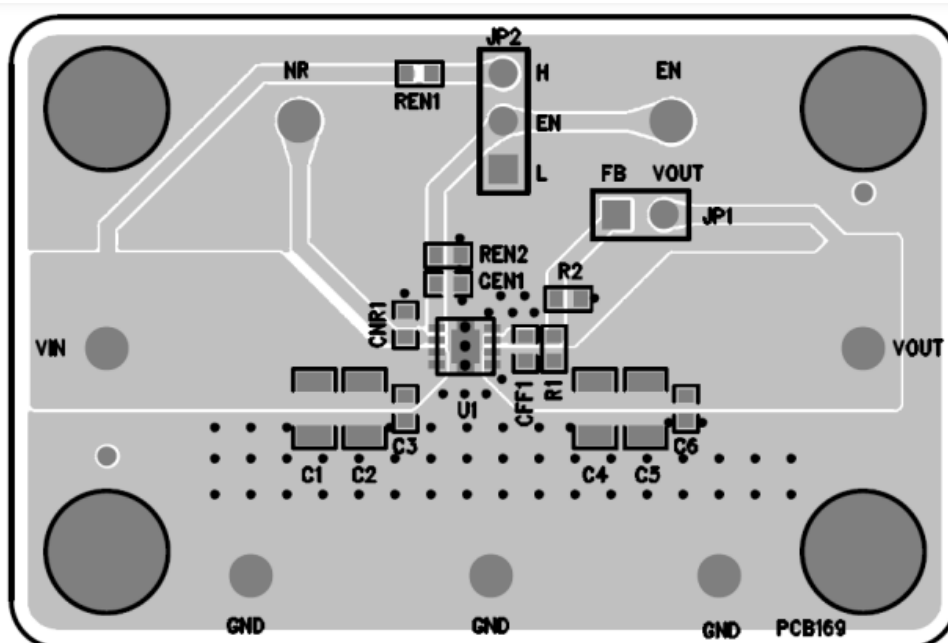


Figure 1. Top View (1st layer)

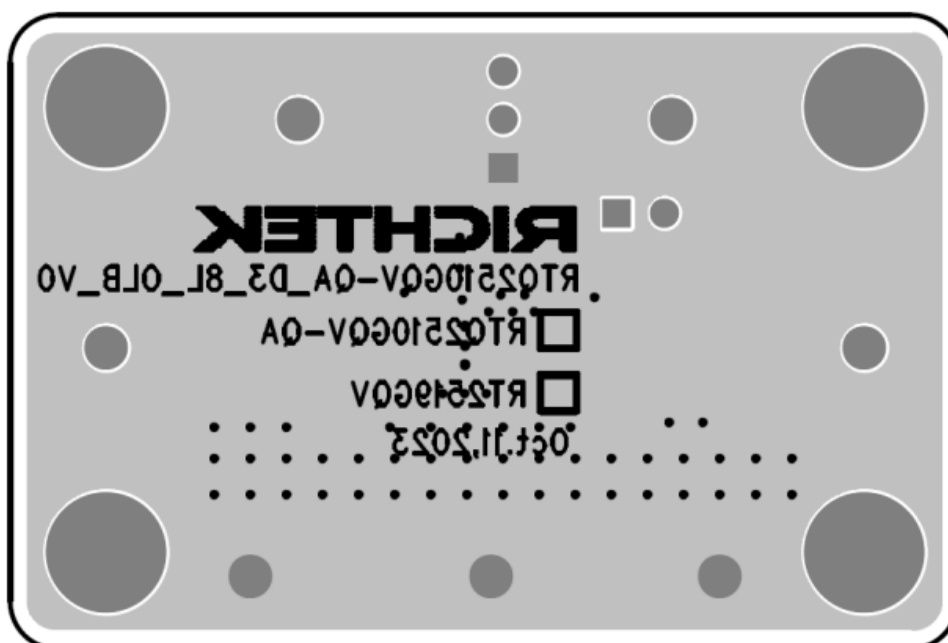


Figure 2. Bottom View (2nd Layer)

More Information

For more information, please find the related datasheet or application notes from Richtek website <http://www.richtek.com>.

Important Notice for Richtek Evaluation Board

THIS DOCUMENT IS FOR REFERENCE ONLY, NOTHING CONTAINED IN THIS DOCUMENT SHALL BE CONSTRUED AS RICHTEK'S WARRANTY, EXPRESS OR IMPLIED, UNDER CONTRACT, TORT OR STATUTORY, WITH RESPECT TO THE PRESENTATION HEREIN. IN NO EVENT SHALL RICHTEK BE LIABLE TO BUYER OR USER FOR ANY AND ALL DAMAGES INCLUDING WITHOUT LIMITATION TO DIRECT, INDIRECT, SPECIAL, PUNITIVE OR CONSEQUENTIAL DAMAGES.

<http://www.richtek.com>

[RICHTEK 2510GQV-QA\(2\) Evaluation Board](#) [pdf] User Manual
2510GQV-QA 2 Evaluation Board, 2510GQV-QA 2, Evaluation Board, Board

- [!\[\]\(1207edb9a08751d3d55970560645ed23_img.jpg\) Richtek Technology](#)
- [!\[\]\(d7a34a706cfa4ef37c62a369101e1b36_img.jpg\) Richtek Technology](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.