



Sensata ISOSLICE-6 4 Output Relay Isoslice Unit Owner's Manual

[Home](#) » [Sensata](#) » Sensata ISOSLICE-6 4 Output Relay Isoslice Unit Owner's Manual 

Sensata ISOSLICE-6 4 Output Relay Isoslice Unit Owner's Manual



Whilst every effort has been taken to ensure the accuracy of this document, we accept no responsibility for damage, injury, loss, or expense resulting from errors or omissions, and reserve the right of amendment without notice.

This document may not be reproduced in any way without the prior written permission of the company

Contents


- [1 Isoslice-6](#)
- [2 Channel Number](#)
- [3 Led Control](#)
- [4 Connections](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)

Isoslice-6

This isoslice unit has 4 relay outputs.

Channel Number

The channel number is set up using the 8-way dipswitch.

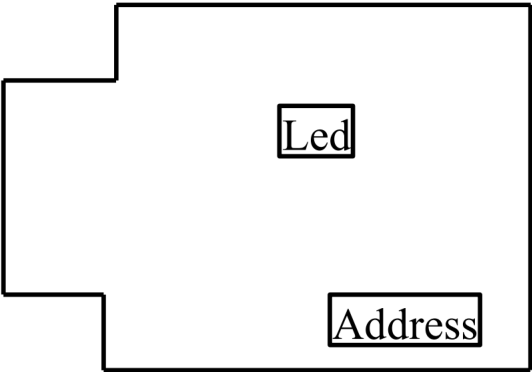

Address Switch	Action
8	add 1
7	add 2
6	add 4
5	add 8
4	add 16
3	add 32
2	add 64
1	is not used

Switches

1 = On, 0 = Off


Channel	2	3	4	5	6	7	8
1	0	0	0	0	0	0	0
2	0	0	0	0	0	0	1
3	0	0	0	0	0	1	0
4	0	0	0	0	0	1	1
5	0	0	0	0	1	0	0
6	0	0	0	0	1	0	1
7	0	0	0	0	1	1	0
8	0	0	0	0	1	1	1
9	0	0	0	1	0	0	0
10	0	0	0	1	0	0	1
11	0	0	0	1	0	1	0
12	0	0	0	1	0	1	1
13	0	0	0	1	1	0	0
14	0	0	0	1	1	0	1
15	0	0	0	1	1	1	0
16	0	0	0	1	1	1	1

Led Control


There are 4 LEDs to indicate the state of the individual relays. The action of these LEDs is controlled by the 4-way dip switch. By default, the LED will be on when the relay is energized, when the corresponding dipswitch (switch 1 is relay 1, etc.) is in the off position.

Individual LED actions can be reversed by switching the corresponding dipswitch on.

Connections

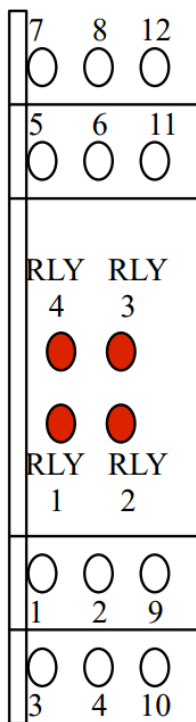

- 7. Relay 4 NO
- 8. Relay 4 NC
- 12. Relay 4 COM
- 5. Relay 3 NO
- 6. Relay 3 NC
- 11. Relay 3 COM
- 1. Relay 1 NO
- 2. Relay 1 NC
- 9. Relay 1 COM
- 3. Relay 2 NO
- 4. Relay 2 NC
- 10. Relay 2 COM

 ISOSLICE-6 4 Output Relay Isoslice Unit <small>WARNING: This document contains information that is proprietary to Sensata. It is intended for use by Sensata customers only. It is not to be distributed, copied, or otherwise used by anyone other than Sensata customers. This document is the property of Sensata and is not to be distributed, copied, or otherwise used by anyone other than Sensata customers.</small> AS-000000 Sensata Technologies © 2008	Sensata ISOSLICE-6 4 Output Relay Isoslice Unit [pdf] Owner's Manual ISOSLICE-6 4 Output Relay Isoslice Unit, ISOSLICE-6, 4 Output Relay Isoslice Unit, Output Relay Isoslice Unit, Relay Isoslice Unit, Isoslice Unit
---	--