

Tasmota L12T Smart Wi-Fi Curtain Module User Guide

[Home](#) » [Tasmota](#) » Tasmota L12T Smart Wi-Fi Curtain Module User Guide 



User Guide

Tasmota is not a commercial product and support is limited. You have to be willing to research and solve potential problems yourself.


Contents

- [1 L12T Smart Wi-Fi Curtain Module](#)
- [2 How to connect:](#)
- [3 Template Parameters:](#)
- [4 How to convert switch module to curtain module](#)
- [5 Smart Home Intergrations](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)

L12T Smart Wi-Fi Curtain Module

Detailed information about connecting, changing settings and modifications is shown on the website “<https://tasmota.github.io/docs/>”

- Power on
- ON/OFF operating principle: The connected appliances work/stop through live wire power on/off.

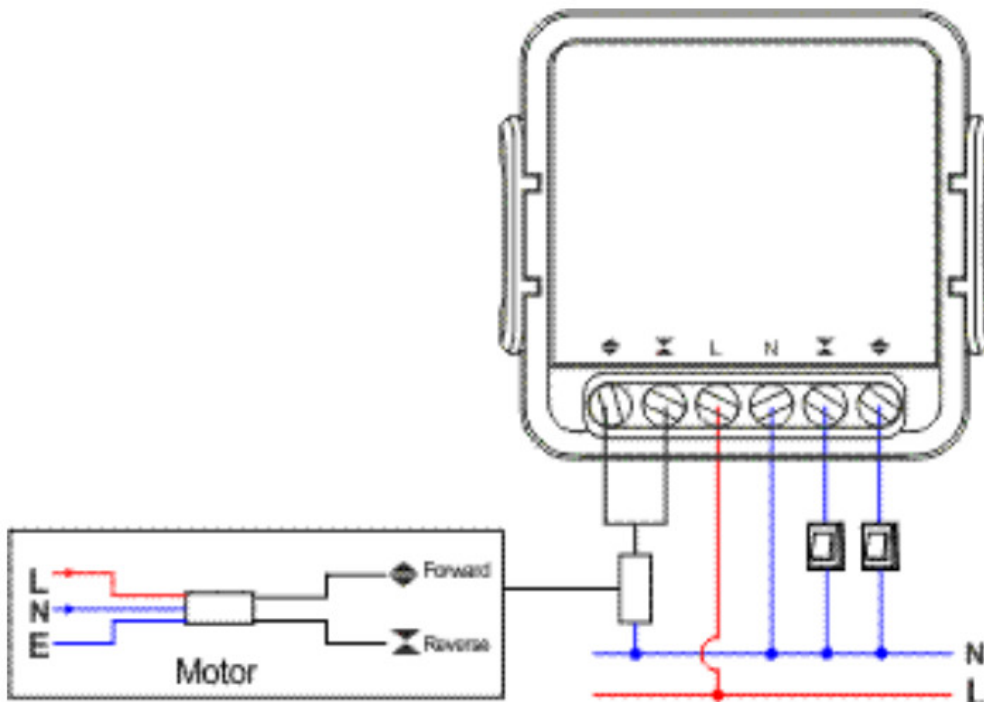

Note: The S1 and S2 must be connected to Neutral

How to connect:

1. Plug in the device
2. Find open wifi hotspot with Tasmota word in name
3. Connect to it and go to 192.168.4.1 address in browser
4. Enter your wifi network name and password
5. After confirming network data, power strip will show you IP address that it will be available from, copy it, just in case.
6. It will automatically redirect you to this address after you network data is filled and saved.
7. Power strip is ready to use. Template and rules already activated, but in case you will need it later – you can find it below

Template Parameters:

```
{"NAME": "Smart WiFi Curtain Module
L12T", "GPIO": [1, 161, 1, 160, 225, 224, 1, 1, 544, 1, 32, 1, 1, 1], "FLAG": 0, "BASE": 18}
```

Smart WiFi Curtain Module L12T

Tasmota

Template parameters

Name	Smart WiFi Curtain Modul		
Based on	Generic (18) ▼		
<hr/>			
GPIO0	User ▼		
GPIO1	Switch ▼	2 ▼	
GPIO2	User ▼		
GPIO3	Switch ▼	1 ▼	
GPIO4	Relay ▼	2 ▼	
GPIO5	Relay ▼	1 ▼	
GPIO9	User ▼		
GPIO10	User ▼		
GPIO12	LedLink ▼		
GPIO13	User ▼		
GPIO14	Button ▼	1 ▼	
GPIO15	User ▼		
GPIO16	User ▼		
GPIO17	User ▼		

Save

Using this template turns the unit into a simple 2-gang switch (eg. L13 [2 gang]).
 To operate the unit as a roller shutter switch, the following commands should be issued:

- enable SetOption80 1
- activate ShutterRelay1 1
- Interlock 1,2
- Interlock ON
- set the switches to follow and inverse SwitchMode1 4 and SwitchMode2 4. Check [SwitchModes documentation](#) for details.
- Then the device should be calibrated for the distance of your curtains, have a look at [Blinds and Shutters](#) configuration page.

How to convert switch module to curtain module

if there is power button:

Hold the power button 40+ seconds, untill light blinks and device restarts

if there is no power button:

Plug the device in and out 6 times and leave plugged in on the 7th – LED should start to blink, that means socket is ready to be connected again

if have access to the web interface:

type reset 1 in console and press enter

Smart Home Intergrations

Tasmota is Incredibly expandable and flexible and can be integrated with:


Alexa, AWS IoT, Domoticz, Home Assistant, Homebridge, HomeSeer, IP Symcon, KNX, NodeRed, nymea, OctoPrint, openHAB, Otto, IOBroker, Mozilla WebThings Adapter, SmartThings, Tasmohab, Homematic ip, etc

for more info look here:

<https://tasmota.github.io/docs/Integrations/>



Documents / Resources

	<p>Tasmota L12T Smart Wi-Fi Curtain Module [pdf] User Guide</p> <p>L12T Smart Wi-Fi Curtain Module, L12T, Smart Wi-Fi Curtain Module, Wi-Fi Curtain Module, Curtain Module, Module</p>
--	--

References

- [User Manual](#)