


Subaru Forester 2008-2012 / C7097

Central Control Disassembly and Operation
Post-installation rendering



TOOLS REQUIRED FOR DISASSEMBLY

1. Wires 2. Installation tools

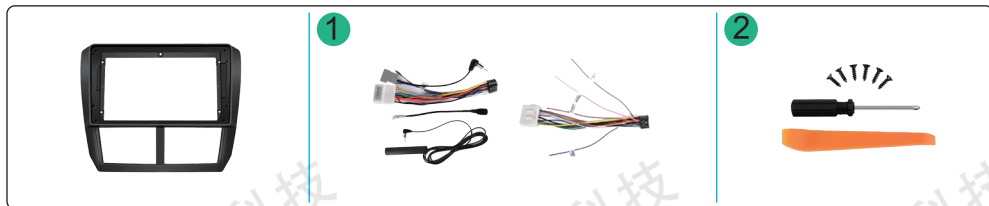

Disassembly:

1. Use a pry bar to pry out the original car frame and remove it, then pry open the original car's air conditioning vent and take it out.




2. Use a screwdriver to unscrew the 4 screws securing the radio on both sides, and remove the radio. Disconnect the cables between the radio and the original car.



Installation (If the wiring harness does not match, please contact customer service to request the correct wiring harness)

1. Attach the original car air conditioning vents to the new radio frame, connect the new radio's cables to the original car, and securely fix the entire radio frame. Installation complete.

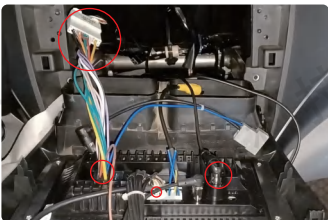

GENTLE REMINDERS

Due to the complexity of the product structure, you may encounter some problems during installation. If you still have any questions about the installation after reading this manual, you can contact us and we will respond to you within 24 hours. Don't worry; we will do our best to solve the problem for you until you are satisfied.

After-sales email: cheyang728@gmail.com

WARN FCC WARNING

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation

PROPOSE

Before starting the replacement job, you should prepare tools such as a plastic pry tool and a screwdriver, and make sure the car's power is cut off during the installation.