

NVS-10400060CS
60W COAXIAL CEILING SPEAKER WITH
MULTIPLE POWER TAP OPTION
User Manual



Contents

Product Overview.....	3
• Description	3
• Features.....	3
Product Dimension.....	3
Installation Instructions.....	4
Technical Parameters.....	5
Specifications.....	6

Product Overview


Description

The NVS-10400060CS is a Ceiling Speaker and it can be switched between the ohms terminal 8 Ω and the voltage terminal 70/100V. The built-in 8" speaker driver has a wide frequency response range of 45Hz to 20kHz. It is made of high-quality ABS material, which assure a long-term durability and never out of shape and it will not color fade. It is an ideal choice for industrial and commercial applications like hotel, school, office and factory where background music and paging is required.

Features

- Clear and sonorous sound
- Long life
- Rated power output at 60 W
- Driver surround excellent damping
- Construction of dual-crossover
- High quality ABS material

Product Dimension

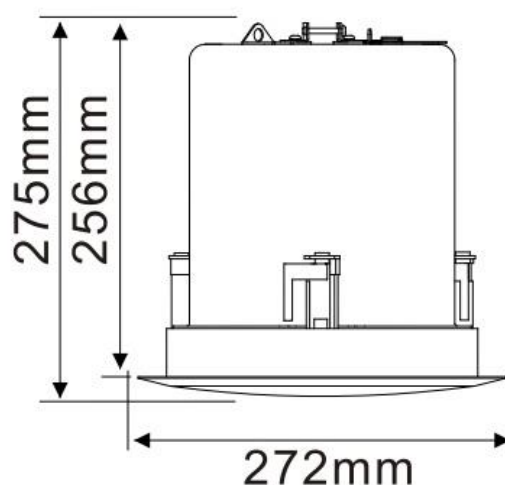

Installation Instructions

TAKE AWAY NET

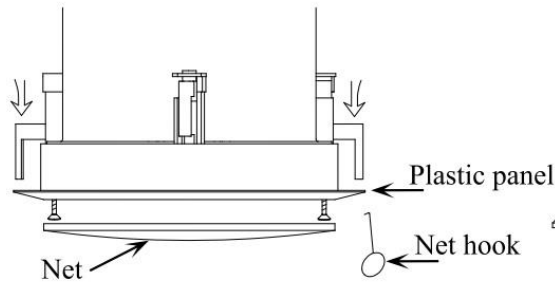


Figure ①

INSTALLATION HOLE

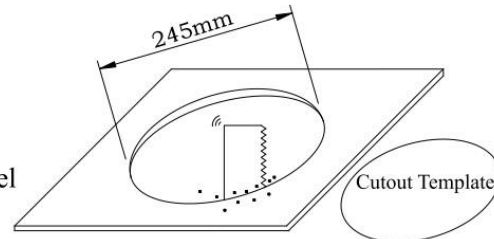


Figure ②

1. Pull the net by the net hook (Figure ①);
2. Cut a $\varnothing 245\text{mm}$ installation hole on ceiling by the cutout template we sent (Figure ②);
3. Pass public address wire through the wire-protecting pipe to connect speaker's terminal, then fix up the strain relief fitting and the terminal cover plate (Figure ③)

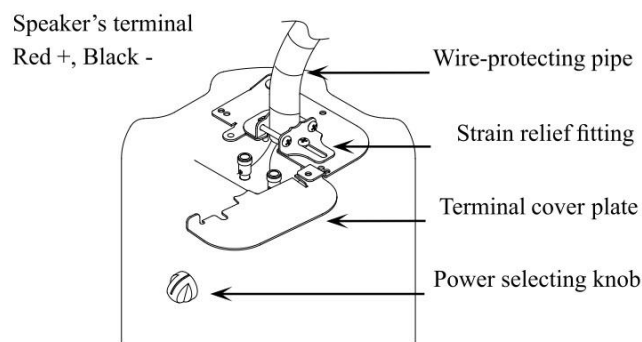


Figure ③

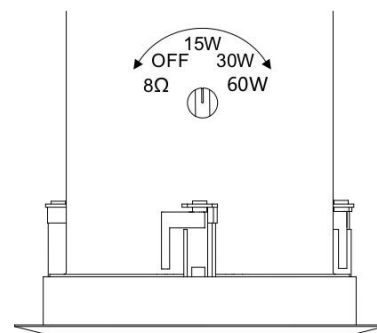


Figure ④

4. Select the power by the power selecting knob (Figure ④).
5. Attach the auxiliary support line through the support ring to another point (Figure ⑤).

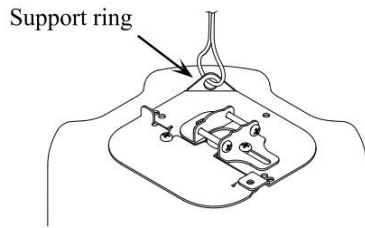


Figure ⑤


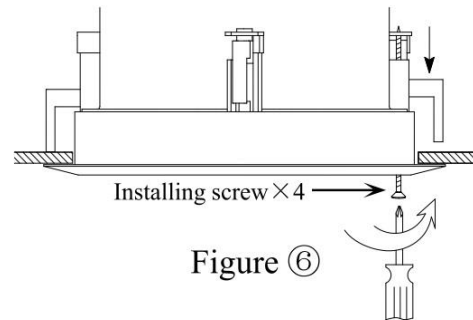


Figure ⑥


6. Push the speaker into the installation hole and turn the installing screw to fix up the speaker on ceiling (Figure ⑥).
7. Push the net into the plastic panel.
8. Adjust the direction of set and examine whether it is steady.

Technical Parameters

FREQ. RESPONSE (dB SPL, 1W, 1m)

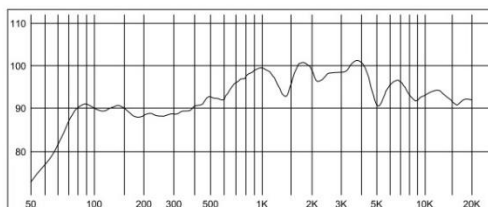

DISTORTION (THD < 1.5% 1W, 1m 200Hz-10kHz)

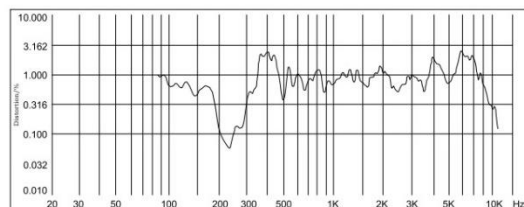

Specification

Model	NVS-10400060CS
Rated power	60W
Driver Size	8" x1, 1"x1
Frequency Response	45Hz-20kHz
Power Taping Options	15/30/60W
Cutout Size	Ø245mm
Input Voltage/Impedance	70&100V/4-16Ω
Coverage Angle	150°
Input Connectors	Spring loaded terminal
Sensitivity (1m,1w)	92dB±2dB
Maximum SPL (1m)	110dB±2dB
Weight	5.7Kg
Dimension	Ø273 x 270 mm