


# PRODUCT MANUAL

## Aroma diffuser

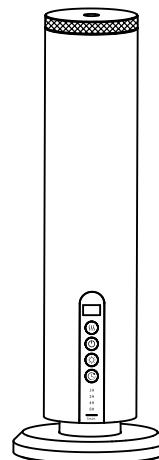

If the QR code cannot be scanned, please search for "Scent Marketing" in Google play or APP store.

## 01 Specification


Model	A326
Size	117.5*117.5*342mm
Bottle	120ml
Input	12V=2A
Working Power	4W
Coverage	100m <sup>2</sup> /300m <sup>3</sup> /10500ft <sup>3</sup>
N.W.	1.35 kg
Li-battery	2200mAh
Material	Aluminum



Bottle  
 Bottle cap  
 Power adapter  
 Manual  
 Atomizing core


Bottle    Bottle cap    Power adapter    Manual    Atomizing core

## 02 Installation step

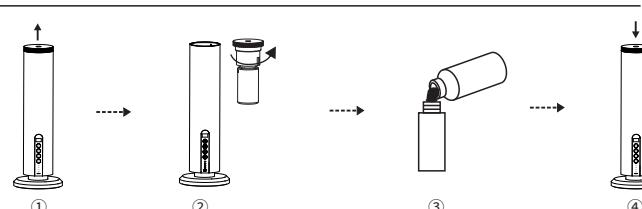

1. Take out the diffuser head;
2. Twist off the bottle;
3. Fill the bottle with essential oil;
4. Put the diffuser head back in the machine.

## 03 Functional analysis

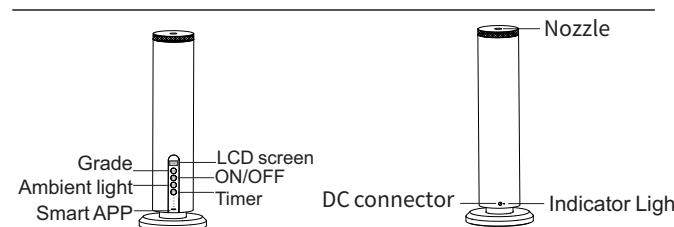

### Grade Button

- Short press to change grades 1→2→3→4→5→Custom



### ON/OFF

- Power on: short press “①” to turn on the machine.
- Power off: short press “②” to turn off the machine.
- Long press for “③” 5 seconds to restore the factory settings (including levels, programs, and password).

**Note:** If the app is connected, the "Smart" light will flash.



### Ambient light

-Press “④” to turn On/Off the ambient light

**Note:** The light can be turned on/off in both power on/off states, so it can be used as a night light.



### Smart APP

- Bluetooth Paired: the light remains on.
- Data receiving: the light flashes.
- Bluetooth Unpaired: the light is off.



### Timer

- Press “⑤” once to switch to a different timer.
- When powered on, the default setting is 24-hour operation. The timer can be adjusted between 1H→2H→4H→8H→Smart and 24H modes.



### Power description:

<20%, (●)red light. >20%, (●)green light

**Charging status(flapping):**

<20%, (●)red light. >20%, (●)green light

100%, (●)green light always on.




## 04 Smart App Instructions

### Where to get the app:




Please search for "Scent Marketing" in Google play or APP store.

### Note:



Make sure that the location function of Bluetooth and mobile phone is enabled.



1. Open the scent marketing app and select Bluetooth.
2. Select your device and choose Bluetooth.



4. On the "Device Control" page; You can change your device name and label information of your scent diffuser.
5. Different schedules by pressing the "+" button. To delete a schedule, swipe left.
6. Press the toggle button to turn on/off any schedule.
7. On the "Working period setting" page; Set the hours of the day you want your diffuser to run by scrolling the "Start working time" and "Stop working time".
8. Select the days of the week you want your diffuser to run (all days are pre-selected).
9. Press "+" or "-" to increase or decrease the preset intensity grades (1-5. See chart for details).



10. Check (✓) the Custom box to create a custom intensity and scroll the "Spray Time" and "Pause Time".
11. Press the "Save" button to update the Settings.
12. Tap "Calibrate" to calibrate consumption. It is advised to calibrate after working for at least 10 days. Please measure the remaining oil of the bottle first before starting calibrating. Enter the current essential oil volume, then click "Confirm" to update the consumption and remaining days automatically.



13. Change the default password by pressing on the "About" tab, in the "Device control".
14. Press the "Password Change" to access the password change page.
15. Enter a new four-digit password, then click "Confirm".

If you forget your password, hold down the On/Off button for 5 seconds, Restore factory settings, password is 8888

## 05 Concentration and consumption

Grade	Work time(s)	Stop time(s)	Battery life(H)	Consumption(g/h)
G1	5s	240s	200H	0.05
G2	15s	200s	80H	0.17
G3	20s	160s	50H	0.27
G4	25s	100s	29H	0.49
G5	25s	60s	20H	0.72
Customized	5-35s	60-300s	--	--

- Note: 1. Above data is for reference only. If customers use essential oils with different viscosities, the oil consumption will vary;  
 2. For the best diffusion effect, it's recommended to use essential oils with a viscosity below 30mPa.s. And the optimal working temperature is 25°C.

## 06 ISED Statement

English: This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.  
 (2) This device must accept any interference, including interference that may cause undesired operation of the device.

The digital apparatus complies with Canadian CAN ICES-3 (B)/NMB-3(B).

French: Cet appareil contient des émetteurs/récepteurs exempts de licence qui sont conformes aux RSS exempts de licence d'Innovation, Sciences et Développement économique Canada.

L'exploitation est soumise aux deux conditions suivantes :

- (1) Cet appareil ne doit pas provoquer d'interférences.  
 (2) Cet appareil doit accepter toute interférence, y compris les interférences susceptibles de provoquer un fonctionnement indésirable de l'appareil.

L'appareil numérique du ciem conforme canadien peut -3 (b) / nmb -3 (b).

This device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 2.5 du cnr - 102 et conformité avec rss 102 de l'exposition aux rf, les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs rf et la conformité.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.

Cet équipement est conforme aux limites d'exposition aux rayonnements du Canada établies pour un environnement non contrôlé.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et votre corps.

## 07 FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and  
 (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**FCC Caution:** Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.


Not applicable

### RF Exposure

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

## 08 Warning

1. Please keep the machine vertical after installation. Tilting or lying flat can cause oil to overflow, and the circuit board may be contaminated, which could affect its efficiency;
2. Should not modify, dismantle or repair the machine arbitrarily. Any malfunction occurs, please contact the relevant technician immediately.



## 09 Troubleshooting

Before asking to have the machine repaired, please try to diagnose the problem first by following the instructions below.

Breakdown	Solution
No diffuse	<ul style="list-style-type: none"> <li>- Check if the power is ON or OFF.</li> <li>- Check if the pump is damaged, if yes, please replace a new one.</li> <li>- If there is no diffusion or it is weak, replace the oil by rubbing alcohol and run it through the machine for 5 minutes.</li> </ul>
Weak diffusion	<ul style="list-style-type: none"> <li>- Atomization head may be blocked. Clean the diffuser by alcohol or replace a new atomized core.</li> <li>- The atomized core with straw may be missed or damaged, replace with a new one.</li> <li>- The pump may be damaged and may need to replace with a new one.</li> </ul>
Oil sprinkle	<ul style="list-style-type: none"> <li>- The atomized head is damaged: change to a new one</li> <li>- The machine is tilted or laying flat, keep the machine vertical.</li> </ul>
Oil leakage	<ul style="list-style-type: none"> <li>- The bottle may be loose, make sure to screw it properly.</li> <li>- The seal gasket may be loose, please replace with a new one</li> </ul>
Abnormal sound	<ul style="list-style-type: none"> <li>- The air pump may be loose or damaged, please tighten it or replace a new one.</li> </ul>
No display on screen	<ul style="list-style-type: none"> <li>- Make sure the power is ON.</li> <li>- The plug may be damaged. Try another electric outlet or replace it with a new plug.</li> <li>- The display screen may be damaged. Please contact our relevant personnel.</li> </ul>

## 10 Equipment cleaning

**The machine needs to be cleaned when below situations happen:**

1. You're about to change to another kind of essential oil;
2. The atomization volume becomes weak .

### Cleaning steps:

- 1 . Find a clean bottle and fill it with industrial alcohol;
2. Install this bottle to the machine and turn the machine on Let it work for 5-10 minutes;
3. Turn off the electric, finish the cleaning.