



Affordable. Reliable. Home Improvement.

Hitch Cargo Bag

Model: SSHB01/SSHB02/SSHB03/SSHB04/SSHB05/SSHB06

Technical Support and E-Warranty Certificate
www.vevor.com/support

VEVOR

Affordable. Reliable. Home Improvement.

Hitch Cargo Bag

Model: SSHB01/SSHB02/SSHB03/SSHB04/SSHB05/SSHB06



This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

Thank you very much for choosing this digital scale. weighing scales are precision instruments that should always be handled with care. Please read all of the instructions before using it. The information will help you achieve the best possible results.

SPECIFICATION

Model	SSHB01	SSHB02	SSHB03	SSHB04	SSHB05	SSHB06
Capacity (ft ³)	12	16	20	20	25	30
Product dimension (mm)	1185× 510×500	1460× 495×605	1520× 610×620	1520× 607×610	1520× 610×778	1530× 610×913

PREPARATIONS

Use of the Cargo Bag

- A. Do not modify the Cargo Bag and do not use this product for purposes that it was not designed for.
- B. Never exceed the maximum load capacity of 100 Lbs/45 kg. This product is designed to pack and travel with light duty cargo and soft goods weighing no more than 100 Lbs/45 kg. Distribute weight evenly inside the Cargo Bag.
- C. Be aware of the danger of "dynamic loading". This situation arises when a load is dropped onto or thrown into the Cargo Bag, resulting in a short term excessive load. Dynamic loading can result in damage and failure of the Cargo Bag, damage to the vehicle and its attached cargo carrier, and personal injury to the person loading the Cargo Bag.
- D. Never load people or animals into the Cargo Bag. Keep children and spectators away when loading, unloading and using this product.
- E. Adhere to all Department of Transportation (D.O.T.) requirements when using this product. Always use all of the adjustable straps included to securely hold the cargo in place.
- F. For the vehicle that will support the Cargo Bag, read all pertinent vehicle

instructions and warnings provided in the owner's manual. Make sure that the vehicle has the appropriate cargo carrier cross bars needed to securely and safely mount the Cargo Bag. Make sure the vehicle's engine is OFF, with parking brake set, before setting up, loading or unloading the Cargo Bag. Make sure the vehicle is in a safe location, away from traffic, when loading or unloading.

G. **AWARNING** This product will require set-up on top of the vehicle's cargo carrier. An assistant may be required to assist in the set-up. Depending on the size of the vehicle, use of a stool or ladder may be required. Use extreme caution when using a stool or ladder to prevent accidents. If you are not experienced or capable of doing this type of set-up, the Cargo Bag should be set-up by a qualified service technician.

H. Make sure the vehicle's engine is OFF, with parking brake set, before loading or unloading the Cargo Bag. The Cargo Bag must always fit within the crossbars of the cargo carrier. Never attempt to carry a load that is wider than the vehicle. Only attach the Cargo Bag to the vehicle's cargo carrier. Never attempt to strap the Cargo Bag directly to the vehicle.

I. Obey all speed limits and traffic laws. Adhere to all state and local regulations regarding loads that extend beyond the configuration of the vehicle.

J. Make sure that hardware and straps are secure prior to each trip.

K. Use caution when driving, turning, and backing up near obstructions which could interfere with the Cargo Bag and its contents.

L. Do not attempt to mount the Cargo Bag on RV's (Recreational Vehicles), trailers or towed vehicles. Do not use the Cargo Bag on off-road vehicles.

NOTICE

Please be sure of cargo in Cargo Bag is always properly secured. Be noticed that sharp edges and irregular surfaces in the cargo may damage the Cargo Bag.

INSTRUCTIONS

1. Begin planning set-up of the Cargo Carrier Bag. Note the straps that surround and hold the Cargo Carrier Bag in place. Note the flaps on three sides of the Cargo Bag. The side without a flap should be positioned facing forward (towards the front of the vehicle). The side with the logo should be facing towards traffic behind the vehicle. Note the adhesive closure on three sides. Pull open the closure to access the zipper which opens the top panel.




2. Check the vehicle's cargo carrier. Make sure it is properly attached to the vehicle. Make sure that all hardware is tight and that the structure of the cargo carrier is in good condition.

3. Load cargo either before or after placing the Cargo Carrier Bag on the cargo carrier. The load should be evenly distributed and must not exceed

100 Lbs/45 kg. Close zip-per and use adhesive closure to seal.

4. Each of the straps should first be attached to the lower cross bars of the cargo carrier (see photo below). the attachment points should be directly below the location of the buckles on the top panel of the Cargo Bag.

Attaching Straps to cross bar of Cargo Carrier

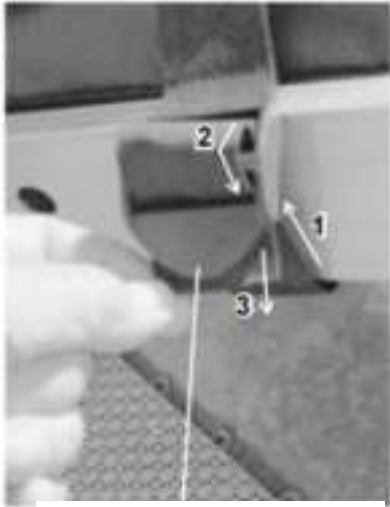

Raise tip of buckle to
loosen strap



Pull down to tighten Strap


Now loop the end of strap underneath the buckle and through the middle slot of the buckle (see photo above left)

5. Next, loop the end of strap through the front slot of the buckle. Pull down on the strap to tighten the strap to the cross bar.

6. If the cargo has not already been added to the Cargo Carrier Bag, now is the time to do so. The load should be evenly distributed and must not exceed 100 Lbs/45 kg. Close zipper and use adhesive closure to seal.

7. Attaching the straps to the buckles on top panel of the Cargo Carrier Bag.

Buckle on
top panel

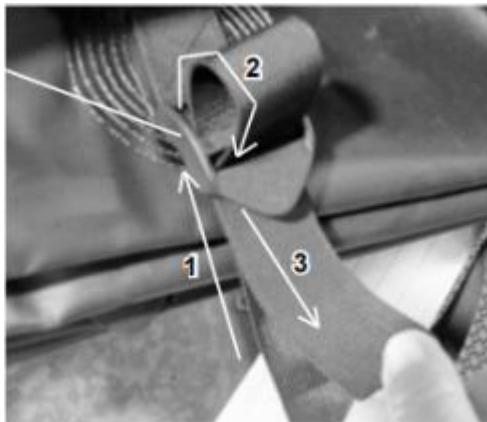

8. Bring loose end of each strap up and underneath the buckle; slide end of strap through the middle slot of buckle and then through forward slot as shown in photo above. Pull down tight on strap for a tight connection.

9. With all straps in place, make one final inspection before the trip begins to be sure the Cargo Carrier Bag is securely connected to the cargo carrier. While on the road, periodically pull over and check the condition of the Cargo Carrier Bag.

10. Maintaining the Cargo Carrier Bag: Keep the Cargo Carrier Bag clean of dirt, grease, harsh chemicals and road salt. Use soap and water and dry with a clean towel.

WARNING

Children should never be allowed to play with the Cargo Carrier Bag. When the product is not in use, it should be removed from the vehicle's cargo carrier and stored in a location that can not be reached by children.

No replacement parts are available for this product.

Manufacturer: Shanghaimuxinmuyeyouxiangongsi

Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.

Imported to AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD NSW 2122 Australia

Imported to USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

UK	REP
-----------	------------

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP
-----------	------------

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.



Technical Support and E-Warranty Certificate
www.vevor.com/support