



TYGER®

TYGER ACCESS

TG-AS2T24003

Scan to Download the Latest Digital Version



BEFORE INSTALLATION

READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION. REMOVE CONTENTS FROM BOX AND VERIFY ALL PARTS ARE PRESENT. FAILURE TO IDENTIFY DAMAGE BEFORE INSTALLATION COULD LEAD TO A REJECTION OF ANY CLAIM. IF MISSING PARTS OR ANY DAMAGE FOUND, PLEASE TAKE A PICTURE FOR THE CLAIM PURPOSE. TO FILE YOUR CLAIM, PLEASE VISIT: WWW.TYGERAUTO.COM/CONTACT

TORQUE VALUES

Fastener Size	Class 8.8 Torque (ft-lbs)	Class 10.9 Torque (ft-lbs)
6mm	6-7	6-7
8mm	15-16	22-23
10mm	31-32	44-45
12mm	54-55	78-79
14mm	87-88	125-126


- | | |
|---|---|
| x1 Driver/Left Tyger Access | x2 Passenger/Right Center & Rear Mounting Brackets [D] |
| x1 Passenger/Right Tyger Access | x12 8-1.25 x 25mm Hex Combo Bolts |
| x1 Driver/Left Front Mounting Bracket [A] | x12 8mm Lock Washers |
| x2 Driver/Left Center & Rear Mounting Brackets [B] | x12 8mmx24mmx2mm Flat Washers |
| x1 Passenger/Right Front Mounting Bracket [C] | x12 8-1.25mm x 30mm Hex Bolts |

Parts List


Top View

ATTENTION: Refer to **D** and **P** labelling on the side of the tubes to determine Driver and Passenger TYGER Access

P Passenger Side TYGER Access

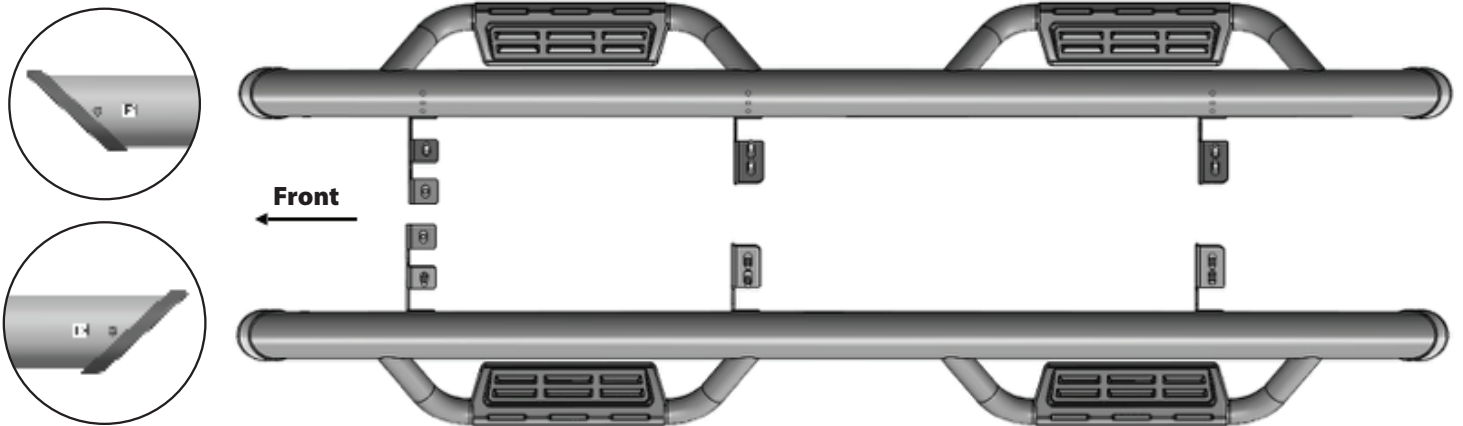


D Driver Side TYGER Access

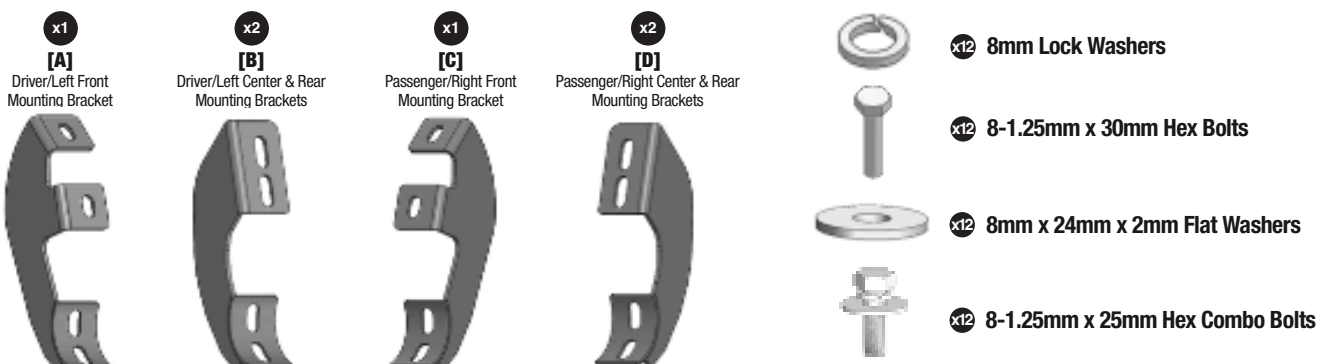

Reference the letters printed on the brackets to determine mounting locations


Top View

D Driver Side TYGER Access






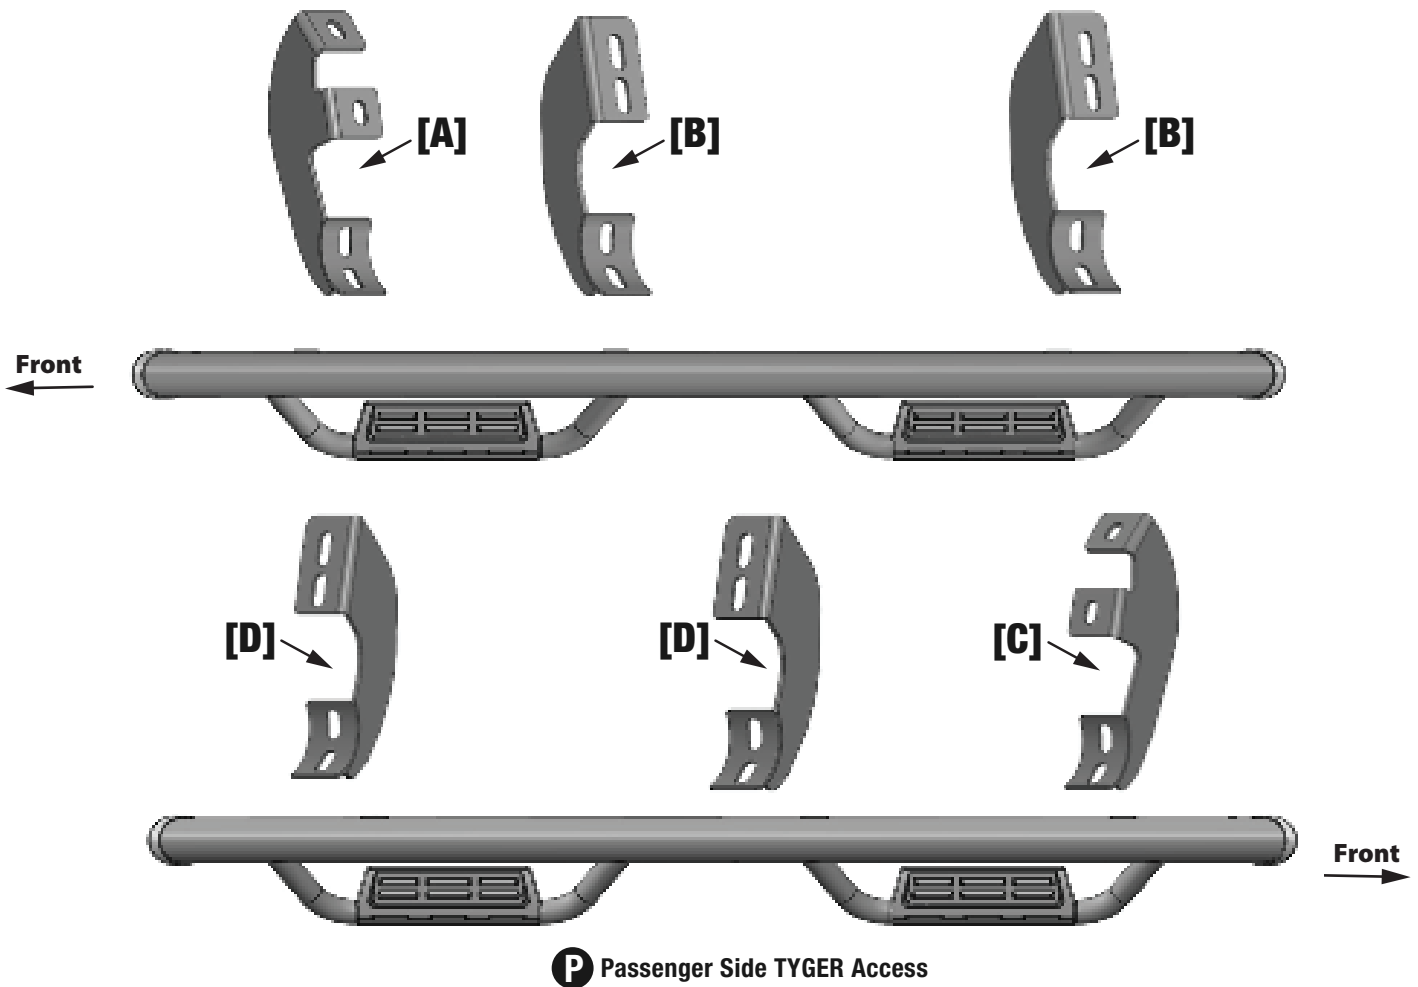


Bottom View

D Driver Side TYGER Access

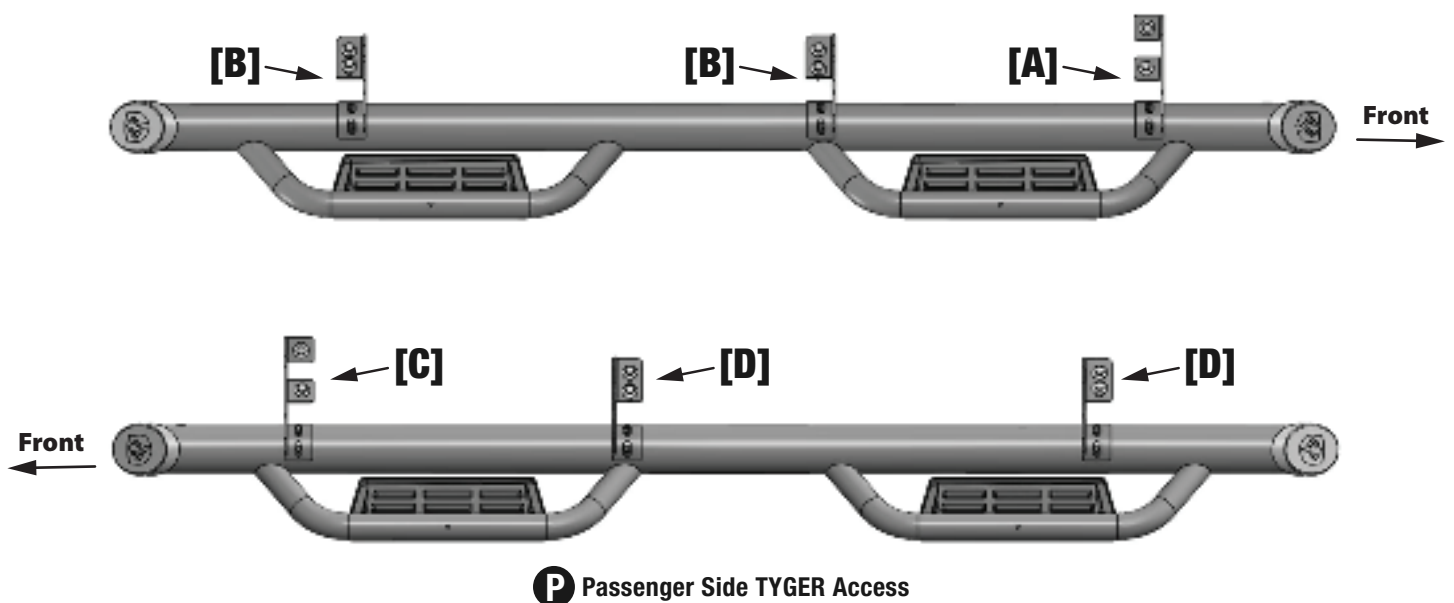


TOOLS REQUIRED

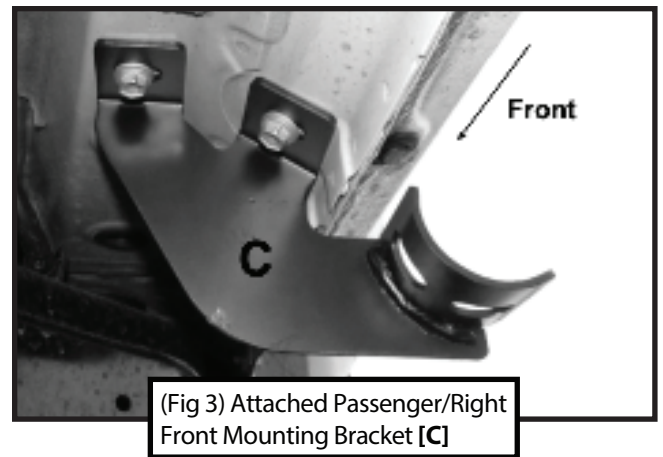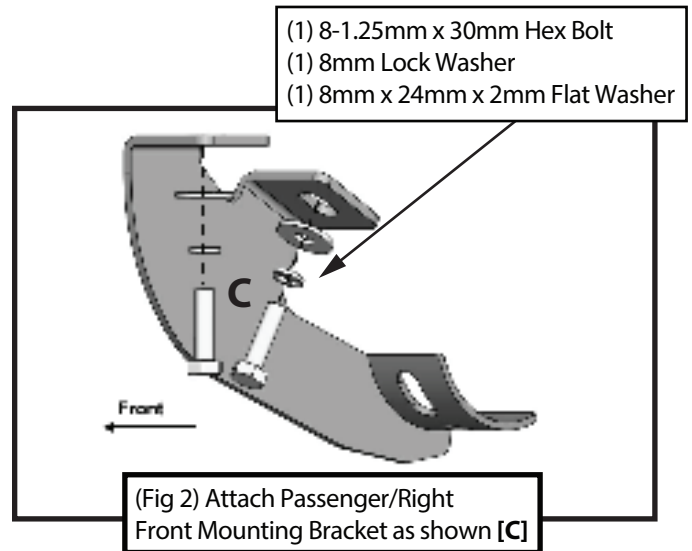


STEP 1 MOUNTING BRACKETS


Follow (Fig 1 – 6) to install the mounting brackets to the Passenger/Right Side. Hand tighten hardware only at this point.




Passenger-side Front Mounting Area

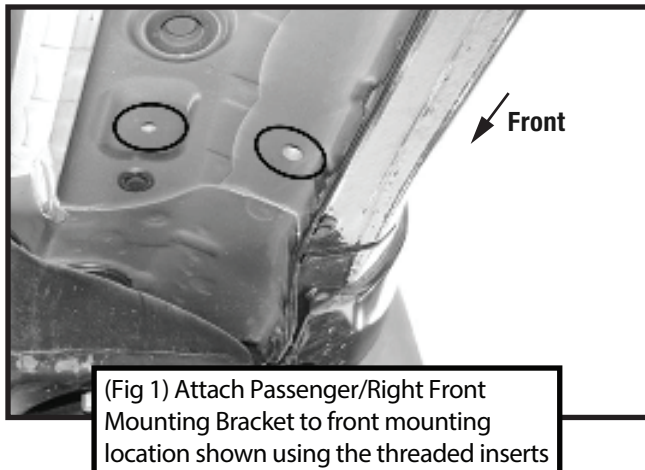


Passenger-side Center & Rear Mounting Area

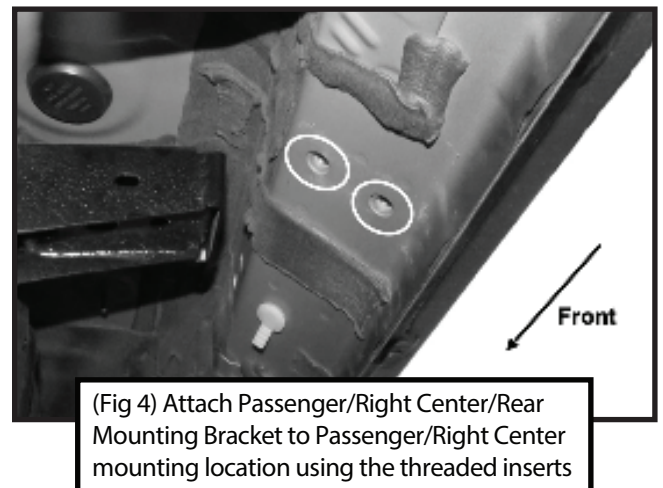

- (1) 8-1.25mm x 30mm Hex Bolt
- (1) 8mm Lock Washer
- (1) 8mm x 24mm x 2mm Flat Washer

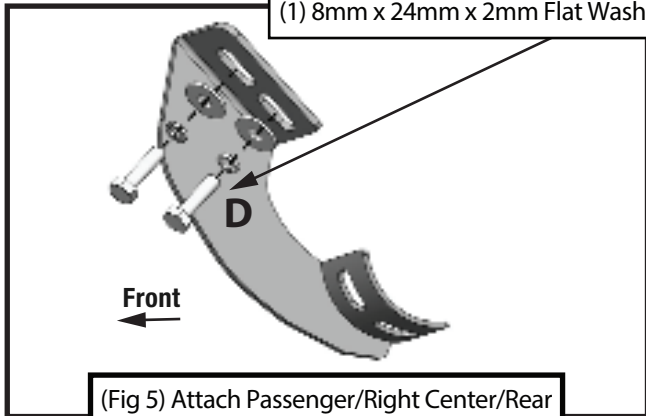


(Fig 5) Attach Passenger/Right Center/Rear Mounting Bracket as shown [D]

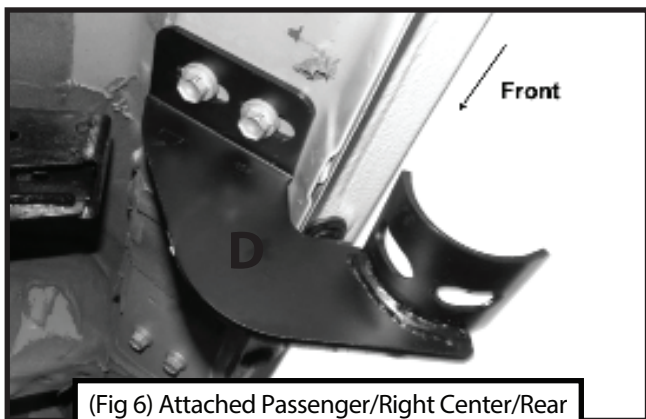

(Fig 6) Attached Passenger/Right Center/Rear Mounting Bracket [D] to Vehicle.

STEP 2 MOUNTING RUNNING BOARD


Follow (Fig 7) to install the Tyger Access Drop Step on the Passenger/Right Mounting Brackets. Ensure all hardware is hand tightened at this point.

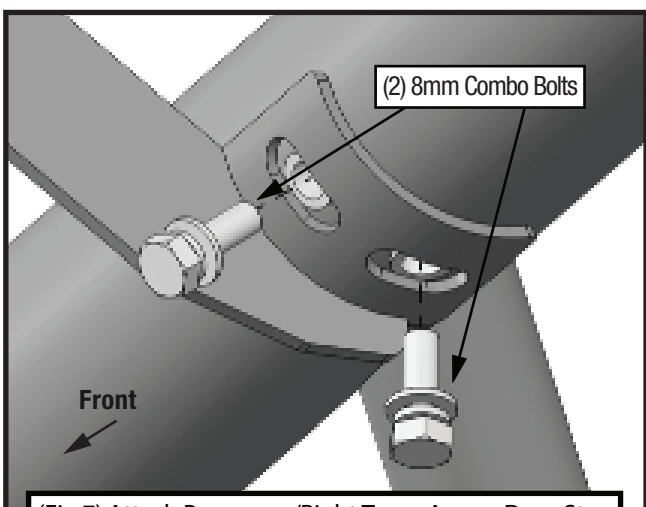

(Fig 7) Attach Passenger/Right Tyger Access Drop Step to Passenger/Right Mounting Brackets, as shown, for all mounting brackets.


STEP 3 DRIVER SIDE

Repeat **STEPS 1-2** for driver side installation.
Use Front Mounting Bracket [A] instead of [C];
Use Center & Rear Mounting Brackets [B] instead of [D].



STEP 4

Ensure Tyger Access Drop Step is level and straightened, then tighten all fasteners. Installation is complete. Perform periodic inspections to the installation to make sure that all hardware is secure and tight.

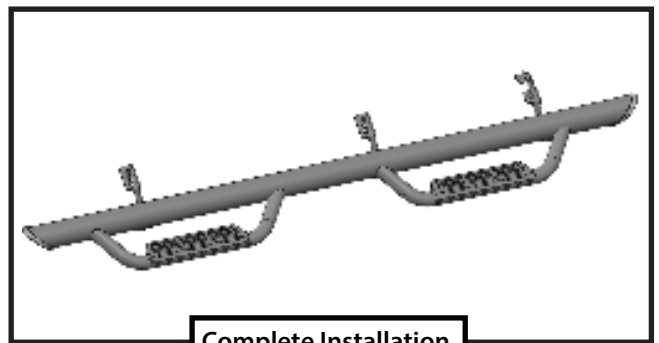

Complete Installation