

- Must be installed by licensed electrician.
- Installation must be in accordance with DMX512-A standard
- DMX Shield must be grounded to Earth Ground at a single point external to power supply

QZ Components






Required Hardware




Mounting Foot:




Mounting

The QZ-DMX can be mounted either vertically or horizontally, utilizing the supplied screws and the mounting tabs on the bottom of the enclosure

CENTER HOLE




SIDE SLOTS




2 The QZ must be mounted into a stud for sufficient support, using either the center holes or the slots of each mounting tab

CENTER HOLE





SIDE SLOTS





When installing multiple QZ power supplies, seperate the enclosures by 3" of space from edge to edge. This prevents the rise of ambient temperature between the power supplies.

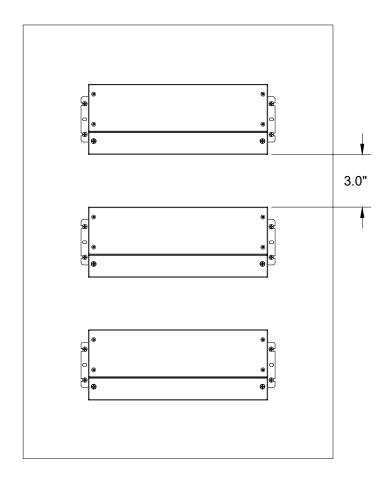

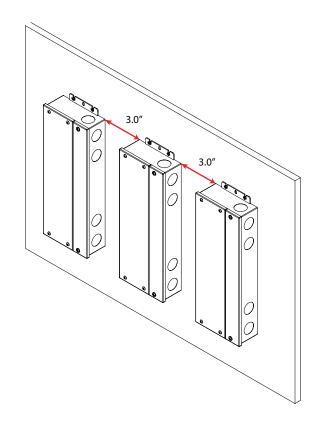


Horizontal mount illustrated above


Vertical mount illustrated above





4

Wiring diagram










Wiring from power supply to light fixture must be single multiconductor cable



QZ-DMX 96W

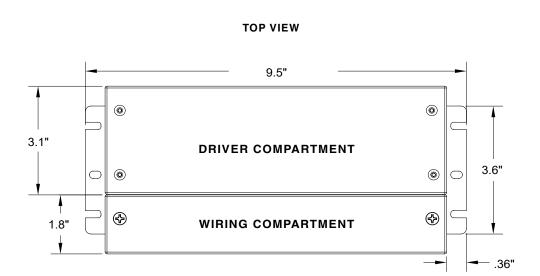

WIRING COMPARTMENT VIEW

