

MICRO SWITCH
a Honeywell Division



FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

V7-1B17D8-122-1

CW-B2035

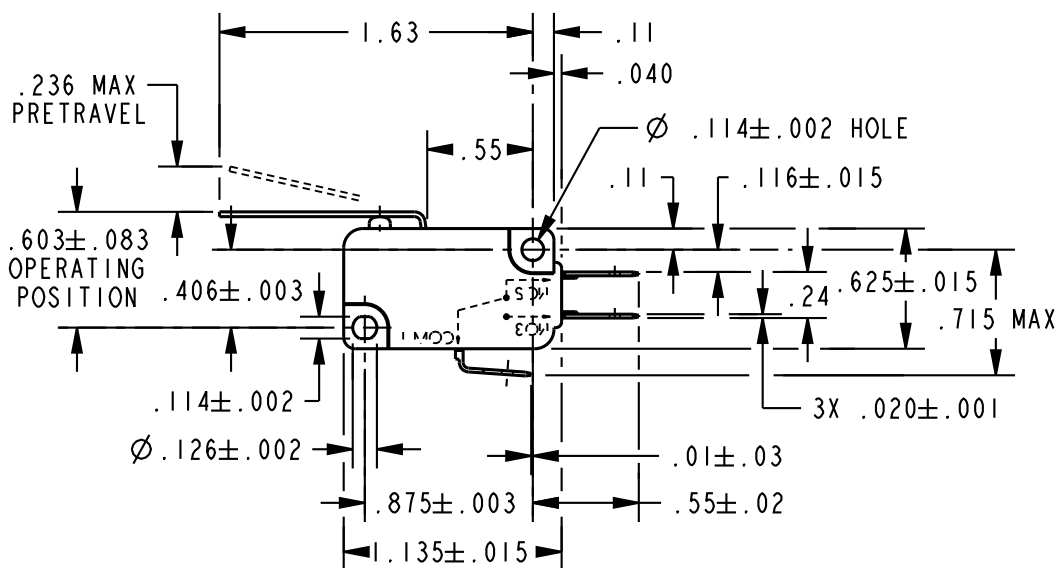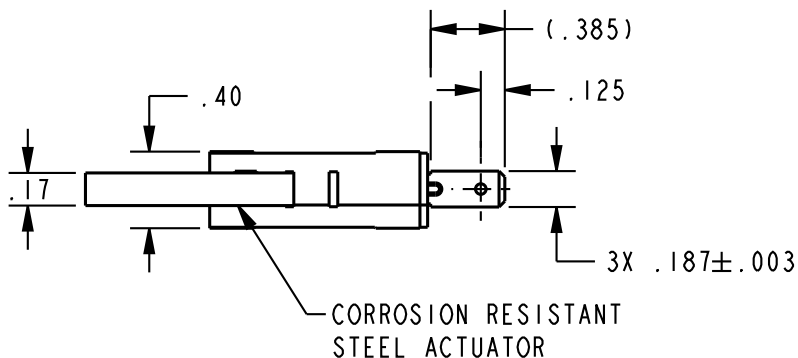


NOTES

1 - TERMINALS AND INTERNAL COMPONENTS ARE SILVER PLATED

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE-----43 GRAMS MAX
RELEASE FORCE -----4 GRAMS MIN
DIFFERENTIAL TRAVEL ----- .053 MAX
OVERTRAVEL ----- .118 MIN
RELEASE TRAVEL ----- .032 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L156

11A 1/3HP 125, 250 OR 277 VAC
1/2A 125 VDC, 1/4A 250 VDC
4A 125 VAC "L"



SCALE NONE

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT

V7-1B17D8-122-1

CATALOG LISTING



ISSUE
3

PAGE 1 OF 1

RELEASE NO. PR-23448

REPLACES

PR-23448

PR-23448

PR-23448

PR-23448

PR-23448

PR-23448

PR-23448

PR-23448

PR-23448

PR-23448

PR-23448

PR-23448

PR-23448

PR-23448

PR-23448

PR-23448

PR-23448

PTC/CAD 2D

DRAWN

PR-23448