


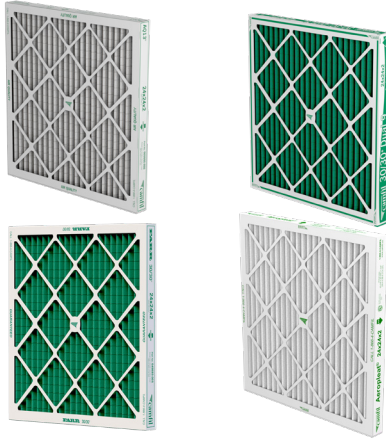

INSTRUCTIONS FOR:

- Farr 30/30®
- 30/30® Dual 9
- AQ13
- All Aeropleat panel filters

STORAGE INSTRUCTIONS

- Store filter in vertical position in original box.
- Keep in temperatures between 5°C - 40°C.
- Store in a clean, dry and frost-protected place
- Do not keep filter in direct sunlight.
- Maximum recommended shelf life, before installation, is five years provided the filter is kept under optimal storage conditions.

HANDLING INSTRUCTIONS

Caution: Handle filter with care. Do not touch the filter media. The slightest touch may lead to leakage. Do not drop filter to prevent severe damage. Avoid liquid spills/splashes on filter.

- Transport and carry vertically.
- Unpacking filters: lift filter by the frame, be careful not to damage the gasket or media. When available, follow instructions on the box!
- Avoid twisting filter frame.
- Large panel filters require two people when handling.

INSTALLATION INSTRUCTIONS

- Keep filter in box as long as possible before installation to avoid damage.
- For vertical installations, make sure filter is fitted with standing pleats.
- Make sure the gasket is not damaged during installation.

FILTER CHANGE

- Camfil recommends protective equipment such as overalls, gloves and face masks when changing filters.
- Always check local regulations before changing filters
- Filters are not reusable. Used filters should be disposed of according to local regulations.



DO NOT

use a blade to open box



DO NOT

apply load on filter media



DO NOT

touch filter media or push on the grids



ONLY HANDLE

large filters by two persons, carry filters vertically



ONLY LIFT

panel filters at the corners of the frame