



Slide Compound Miter Saw

LS1110F 255 - 260 mm



LED job light with cut line guide function



*Max cutting width:


310 mm

*Max cutting height:

91 mm

*with 260mm (10-1/4") saw blade

LED job light with cut line guide function

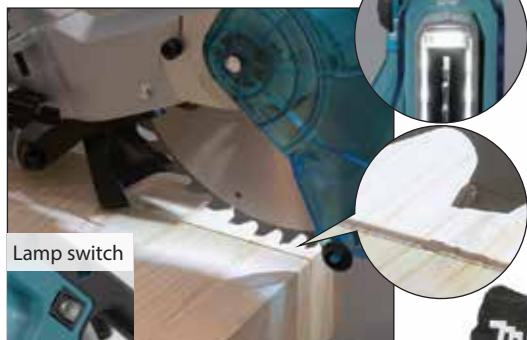

Lamp switch

LED job light casts a shadow of the saw blade onto the workpiece as an exact cutting line. By aligning the shadow with the ink line on the workpiece, you can make an exact cut.

Carrying handle
for easy transportation to job site


Soft grip

Sub base
can be pulled out for more stable cutting of wide workpiece.


Bevel range of 47° left and 2° right

Easy bevel angle change from 45° to 47° left and from 0° to 2° right with simple operation of a push-button

Lever
(for bevel angle)



Push-button

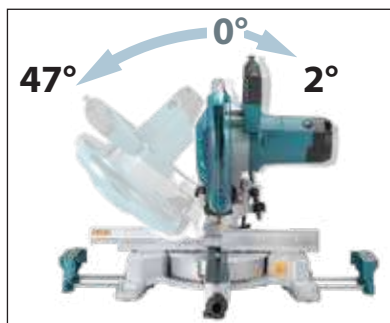

Slide style sub fence

(left side only)




Miter range of 47° left and 47° right




Cutting capacity (height x width)

with 260mm (10-1/4") saw blade

Cross Cut




Miter Cut (left & right)

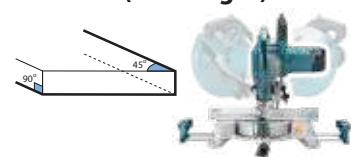

Miter 0° Bevel 0°	91 x 310 mm (3-5/8 x 12-1/4")	Miter 45° left / right Bevel 0°	91 x 220mm (3-5/8 x 8-5/8")
----------------------	----------------------------------	------------------------------------	--------------------------------

Bevel Cut (left & right)



Compound Cut



Miter 0° Bevel 45° left	50 x 310mm (2 x 12-1/4")	Miter 45° left / right Bevel 45° left	50 x 220mm (2 x 8-5/8")
Miter 0° Bevel 2° right	85 x 310mm (3-3/8 x 12-1/4")		

Accessories

Miter Saw Stand WST06



Slide Compound Miter Saw

LS1110F 255 - 260 mm

	Double Insulation	Continuous rating Input	1,450W
	Brake	Wheel diameter	255 - 260 mm
	Soft Start	Bevel angle	Left: 47° / Right: 2°
	Dust Collection	Miter angle	Left: 47° / Right: 47°
	Built-in Job Light	No load speed (RPM)	4,500 v/p
		Sound pressure level	91 dB (A)
		Sound power level	102 dB (A)
		Dimensions (L x W x H)	745 x 497 x 565 mm
		Net weight	16.4 kg (/w vertical vise)
		Power supply cord	2.0 m

Standard Equipment : Dust bag (JM00000624), TCT saw 260X40T (D-77338), hex key wrench 6mm & PH2 (JM00000445)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area. A4-122023-3

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 456, Block 16, 18/12 Đường số 3, KCN VSP, P. Hòa Phú, TP. Thủ Đức, Bình Dương
ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC
Khu 5, Số 1, Đường Số 6, KCN - DT - DV VSP Bắc Ninh, P. Phú Chấn,
TP. Từ Sơn, T. Bắc Ninh.
ĐT: 0222 316 5942 Fax: 0222 316 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HÀ NỘI
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội.
ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH BẮC NÂNG
Số 40, Đường Chi Lăng, P. Hải Châu M, Q. Hải Châu, TP. Đà Nẵng
ĐT: 0236 352 5078 / 0236 352 5178 Fax: 0236 352 5479

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH CẦN THƠ
366 Võ Văn Kiệt, Khu Vực S, P. An Thới, Q. Bình Thủy,
TP. Cần Thơ.
ĐT: 0292 389 4358 Fax: 0292 389 4359

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH BÙN MA THUẬT
89 Lê Đức Thọ, P. Thới An, TP. Bùn Ma Thuật, T. Bắc Lát,
ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HẢI PHÒNG
Số 01 Lô D4-01, Dự án Hoàng Huy Riverside, P. Thượng Lý,
Q. Hồng Bàng, TP. Hải Phòng.
ĐT: 0225 883 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH NHÀ TRANG
Là 36/36 đường B6, Khu đô thị Vĩnh Diêm Trung, Xã Vĩnh Ngọc,
TP. Nhà Trang, T. Khánh Hòa
ĐT: 0258 220 0039

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HỒ CHÍ MINH
Số 12 Trịnh Văn Căn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh.
ĐT: 0283 821 5191