




**MARC200**  
Remote Control

## KEY FEATURES

- Two-piece modular design (commander and tuner/amplifier module)
- Waterproof commander (IPX6) and module (IPX5)
- App Ready -ASA Audio pp controls all of the primary functions of App Ready Marine Audio stereos directly from a phone or tablet.
- Bluetooth® interface capability (A2DP/AVRCP)
- SiriusXM-Ready™ (tuner and subscription required)
- Seven-channel NOAA weatherband
- AM/FM electronic tuner (US/Euro selectable)
- USB jack for connection of digital media devices (requires JENAX audio input jack)
- Full iPod®/iPhone® controls and charging via USB
- AUX line-level audio input (RCA)
- Four-channel line-level audio output (RCA, front & rear)
- EQ Presets
- Two-wire power system with non-volatile memory
- Wired remote control capable (MARC200)
- Conformal coated circuit boards
- Corrosion resistant materials/finishes (ASTM B117)
- UV resistant front panel (ASTM D4329)
- Low battery warning
- Regulatory certifications: C-Tick/RoHS
- App control: compatible with both Apple & Android users

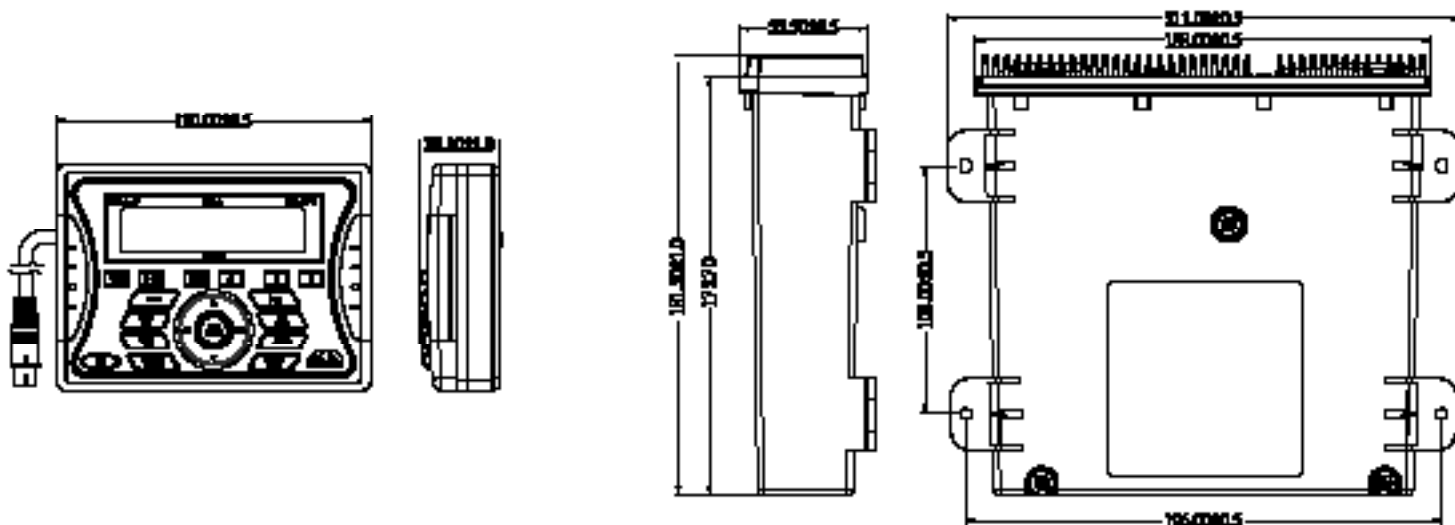

## Specifications

### General Specifications

Power System		12 VDC
Operating Voltage Range		10 V to 16 V
Current Draw @ 12V	Idle	103 mA
	Nominal	450 mA
	Maximum	9.71 A
Operating Temperature Range		14°F to 140°F    -10°C to 60°C
Storage Temperature Range		-4°F to 158°F    -20°C to 70°C
Maximum Relative Humidity		100%
Overall Package Dimensions		L x W x H
Product Weight (unpacked)		2.7 lbs.

### Performance Specifications

FM Sensitivity		2 mV
AM Sensitivity		30 mV
Output Power	RMS	20.4 W per channel
	Maximum	50 x 4 W
Total Harmonic Distortion		0.1 %
Applied Test Suite		ASA ES0001
Regulatory Certifications		FCC Part 15B, CE, C-Tick, RoHS