



MAKE A DIFFERENCE


Inter Cargo Rack

BXG.4700-S
(INSTALLATION INSTRUCTION)

ATTENTION • Please verify all parts are present and read instructions carefully before starting installation.
Please feel free to contact your distributor if you have any kind of question about your purchase.

1 CONTENTS

Left

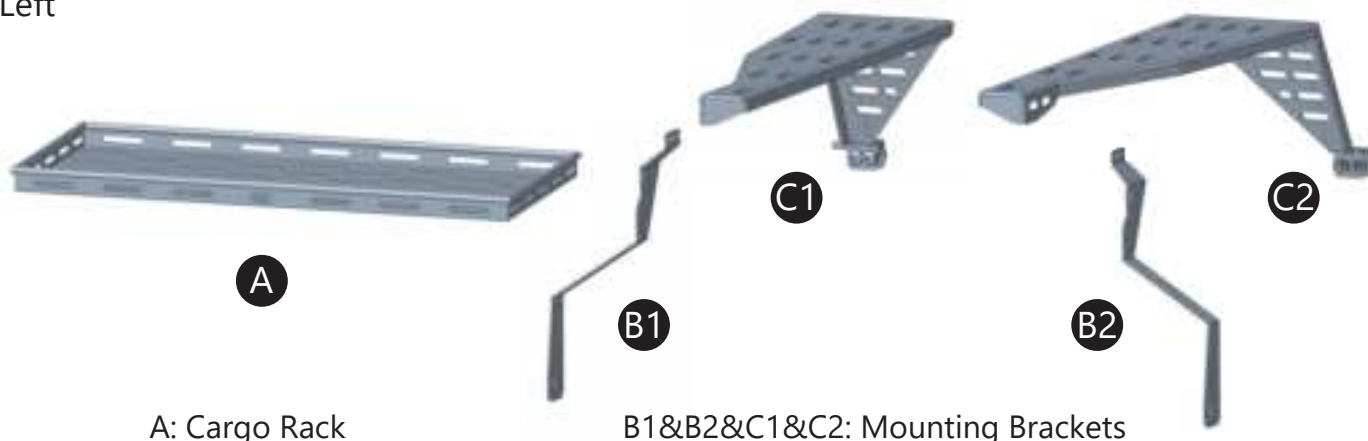

A: Cargo Rack

B1&B2&C1&C2: Mounting Brackets

Qty	Part Name	Size(mm)	Picture	Qty	Part Name	Size(mm)	Picture
4	Button Bolt	M10×20		8	Split Lock Washer	D8	
4	Button Bolt	M8×25		4	Flat Washer	M10×20×1.5	
4	Button Bolt	M8×20		8	Flat Washer	M8×16	
4	Cross Recessed Round Head Tapping Screw	M5×35		4	Flat Washer	M5×12	
4	Split Lock Washer	D10		4	Flange Hex Lock Nut	M10	
4	EVA	430*50		1	Net		

2 TOOLS REQUIRED

◆ Drive Socket Ratchet Wrench

◆ 5mm, 6mm Hex Bit Socket

◆ 15mm Wrench

◆ Phillips Screwdriver

To view online instruction, please scan the QR code.



INSTALLATION INSTRUCTION:

Step 1

Place the vehicle in park and put down the rear seats, empty the rear row and prepare to install the luggage rack. Find the factory installation positions.



Step 2

Remove the factory accessories.




Step 3

Secure the mounting B to the vehicle. **Do not fully tighten to allow adjustability.** Repeat this step on the other side of the vehicle.


•(4) M5×35 Cross Recessed Round Head Tapping Screw

•(4) M5×12 Flat Washers

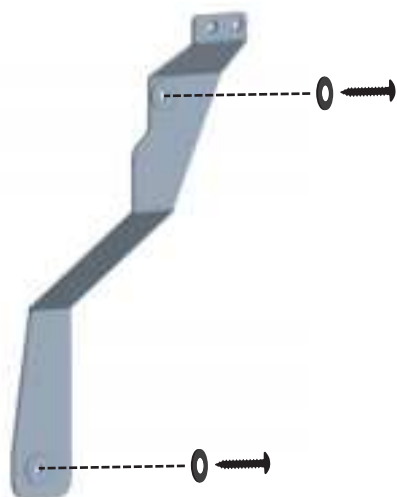


Secure the mounting bracket (C) to the vehicle. Assemble the mounting bracket (B) & (C). **Do not fully tighten to allow adjustability.** Repeat this step on the other side of the vehicle.

- (4) M8×25 Button Bolt
- (4) D8 Split Lock Washers
- (4) M8×16 Flat Washers

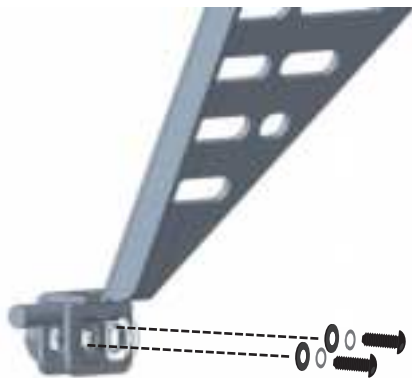

- (4) M8×20 Button Bolt
- (4) D8 Split Lock Washers
- (4) M8×16 Flat Washers

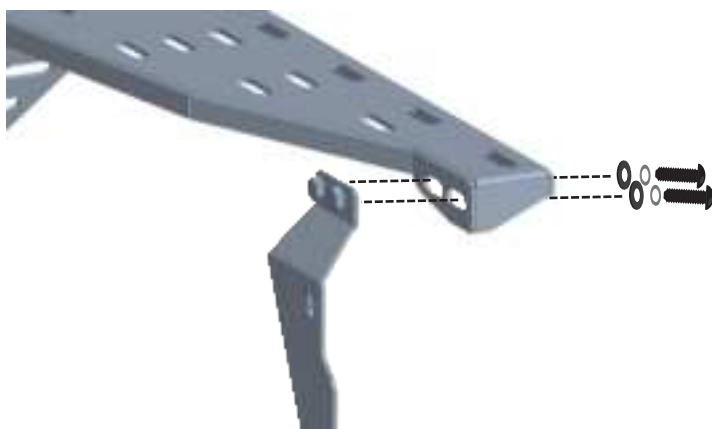

Assemble the brackets & the cargo rack. Repeat this step on the other side of the cargo rack. **Finally, tighten all hardware.**

- (4) M10×20 Button Bolt
- (4) D10 Split Lock Washers
- (4) M10×20 Flat Washers
- (4) M10 Flange Hex Lock Nuts

