


PADDLE-BOARD-PUMP Model: HT-769Plus

Technical Support and E-Warranty Certificate www.vevor.com/support





MODEL: HT-769Plus

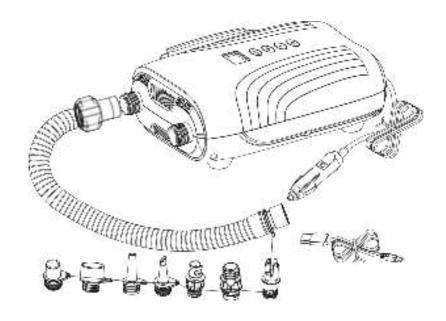

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.



Warning-To reduce the risk of injury, user must read instructions manual carefully.



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



This product is subject to the provision of European Directive 2012/19/EC. The symbol showing a wheelie bin crossed through indicates that the product requires separate refuse collection in the European Union. This applies to the product and all accessories marked with this symbol. Products marked as such may not be discarded with normal domestic waste, but must be taken to a collection point for recycling electrical and electronic devices

I. Warnings

- * Warning: This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.
- * Warning: Children shall be kept far away from this product and wire.
- * Warning: This product shall not be exposed to the rain or immersed in water.
- * Warning: Before moving, maintaining, repairing or adjusting this product, please first pull out the cigarette lighter plug from the socket.
- * Warning: Please do not bury the wire in the soil, and it shall be place in the safe zone where it won't be damaged by mower or other equipment.

- * Warning: If the power wire is damaged, the power wire must be changed by the manufacturer or its service agent or the similar authorized personnel, in case of any risk.
- * Warning: If you are standing in a place with water or your hands are wet, please don't plug or pull the cigarette lighter plug.
- * Warning: Before inflating, please pay attention to check the maximum bearable pressure of the inflatable product, because the air bag may be damaged upon exceeding the maximum bearable pressure.
- * Warning: Before using, please check the cigarette lighter socket to make sure that there is no rust or residue inside. The cigarette lighter socket with poor electric conduction may cause overheating of the product or power source, which will damagde the product.
- * Warning: The purpose of using this product is limited to the description in the instruction book.
- * Warning: The product cannot be used under flammable and explosive environment.
- * Warning: Please use this equipment at ambient temperature of no more than 40 degrees.
- * Warning: The pressure line of the product is only suitable for the original wave pipe.
- * Warning: Be sure to check if the wave pipe is broken, and make sure the switch, the cigarette lighter and the pressure screen really work prior to use.
- * Warning: Keep away from heat source, humidity, dust and direct sunlight.
- * Warning: Do not throw this product into fire for fear of explosion, battery leakage or other dangers.

II. Product Introduction

HT-769Plus is an intelligent power storage air pump with preset pressure value and It can inflate inflatable tents, inflatable beds, canoeing, etc. In addition, it has an intelligent pressure system. That is to say, air pump will automatically stop inflation when Pressure reaches the preset pressure value.

This product also can deflate and when the inflatable product is not used, you can use the air pump to empty the air inside for folding and storage.

III. Product parameters


Pressure	0-20PSI	Input voltage	DC12V
Battery	4000mAh	Charging time	
Charging input	USB 5V/2A or 12V/1.5A	5V/2A	About 6 hours
\	\	12V/1.5A	About 3 hours

IV. List of Accessories

* Please make sure that the following accessories are in the box before using it, if any missing, please contact with the local agents or distributors.

Air pump	Hose Air tap Type-C USB cable	Instruction Book	sealing ring
	0000005		


V. Details of Accessories

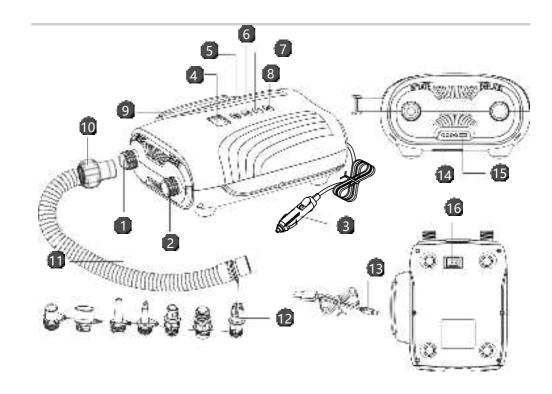

1	Inflation inlet	9	Handle
2	Deflation outlet	10	Flexible conduit adaptor
3	Cigarette lighter plug	11)	Hose
4	Pressure value LCD screen	12	Air nozzle
5	Pressure unit toggle button	13	Type-C USB cable
6	Pressurizing button	14)	Charging indicator light
7	Decompressing button	15	Type-C power input interface
8	On/off button	16	Switch

VI. Inflation Operation


- *Connect the end with flexible conduit adaptor of the hose with the air pump inflation inlet and twist clockwise to tighten it, as Fig1.
- * Install the other end of the hose into the supporting air tap of the air bag as Fig 2, and twist clockwise to tighten it, and then insert the inflation valve of the air bag and twist clockwise to fix it (Fig 2).
- *Turn on the power switch. II = (the symbol "-" on the switch means "ON", "O" means "OFF") Gently press switch button (to start inflation or plug the cigarette lighter plug into the 12V DC socket(Fig 3).

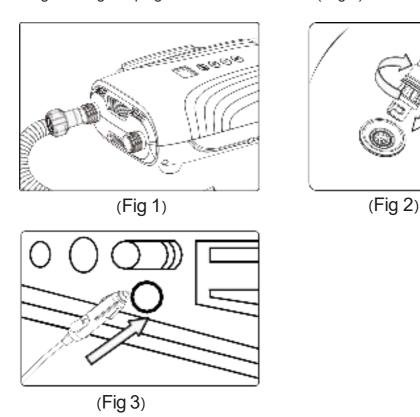

- * Press the pressure unit toggle button to select the until you need.
- * Press the pressurizing button (+) or decompressing button (-) to set the pressure value you need, with the range of the pressure value from 0 to 20PSI, (1PSI=0.0689BAR=6.89KPA).
- *After finishing the above steps, press the power switch button (to start to inflate.
- *During the inflating process, you can press the pressurizing button or decompressing button () to increase or reduce the pressure value, press the pressure unit toggle button () to switch the unit, and press the On/Off button () to stop.
- * Press and hold the On/Off button for 3 seconds to directly start the high pressure pump.
- *When the pressure reaches the set value, the air pump will stop working automatically.
- *After pulling out the DC plug, please take down the hose from the air pumpair bag and store it.
- * Notice: The factory set pressure value of the air pump is 20PSI (1PSI =0.0689BAR=6.89KPA), and at the time of the secondary use, the set pressure value for the last time use will be displayed by default.

VII.Deflation operation

- * Remove the hose from the inflation inlet; connect the end with flexible conduit adaptor of the hose with the air pump deflation outlet, and twist clockwise to tighten it (Fig 4) and the other end shall still be to the airbag.
- * Turn on the power switch. ||a | (the symbol "-" on the switch means "ON", "O" means "OFF") Gently press switch button (iii) to start deflation or plug the cigarette lighter plug into the 12V DC socket (Fig 3) to start deflation until all the gas is discharged, then the power can be turned off to stop the deflation.

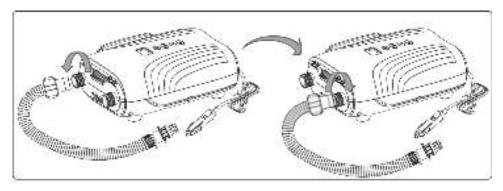


(Fig 4)

* When not in use, turn off the power switch " , remove the hose from the air pump and air bag and store the product properly. (the symbol "-"on the switch means "ON", "o" means "OFF").

VIII. Precautions

- * The product Type-C USB of 5V 1A, 5V 2A or fast charge 12V 1.5A for charging and product shall not be started during charging.
- * Do not block the inflation inlet and deflation outlet and ensure that the inflation inlet and deflation outlet shall remain smooth at all time.
- * Observe the local waste treatment provisions and it is not allowed to throw the air pump away randomly.
- * Don't use this product when the hose is damaged, and please change the hose immediately.
- *Don't pull out the hose when inflating, because that the high pressure may hurt the physical body.
- * Don't make the air pump work for more than 20 minutes, because that motor overheating may cause internal damaged and the air pump shall be fully cooled for 30 minutes after continuously working up to 20 minutes.
- * Please don't use tis air pump if any part is damaged and please contact with the professional personnel to repair it.
- * In order to prevent risk, the inflation inlet shall not be forward to face or body.


* Please don't leave while inflating.



- *This product shall not be disposed of with household waste and must be disposed of in an approved location for recycling electrical and electronic products.
- *By collecting and recycling waste, you can help conserve natural resources and ensure that product is treated in an environmentally friendly and healthy way.
- * The built-in batteries of this product must be removed from the equipment and disposed of properly before being scrapped.
- * Please charge the battery at least every 6 months to ensure good battery performance.
- * Please start the car when using the product, in case of unnecessary damage.

IX. Charging

* Please use the Type-C USB cable supplied with this product to charge (When charging, the blue light blinks and the red light is long, indicating that it is in the fast charging state). Please make sure to use a 5V USB interface for charging (Fig 5).

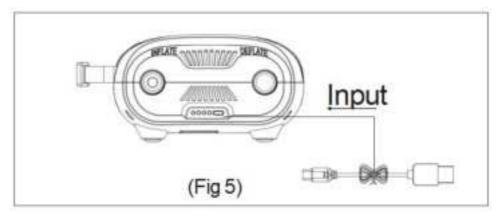

- * When only one indicator is on, it is recommended to charge the product in time. The indicators will flash during charging, and all the indicators will be on when the product is fully charged.
- * Make sure the battery is fully discharged before the first charge. After the battery is discharged, the internal temperature is too high. It is recommended to cool it down before charging it. Do not let the electric air pump in a state of no electricity for a long time.

X. Fault Handling

Malfunction	Cause	Solution
The air pump cannot be started normally.	1. Check if the switch " a . " is turned on and the battery is fully charged. 2. Overheating or overload causes motor stop.	 Turn on the power switch and charge it in time. Cool the motor and restart it. If the problem cannot be solved, please contact local agents or the similar authorized personnel.
Slow or abnormal inflation.	 Check whether the hose is blocked or cracked. The joint between the hose and air pump or air bag is not installed properly. 	 Change the hose or make it unblocked, and check whether the hose is cracked. Reinstall the hose. If the problem cannot be solved, please contact with the manufacturer or its service agent or the similar authorized personnel.
E2	Forced shutdown when product detects that temperature reaches 100 $^{\circ}{\rm C}$.	Heat dissipation is required.
E3	Shutdown protection without increasing air pressure.	Check for air leaks.
Air pressure does not return to zero.	Remove the connecting trachea.	Press and hold the pressure unit toggle button for more than 3 seconds to return to zero.

XI. Maintenance and Storage

- * Please remove the power plug from the electric outlet after use or before moving, servicing or adjusting the product.
- * Cool it well and put it in the box when it is not in use.
- * Please use it indoors, and protect it against direct sun exposure or rain.
- * Please store it in a dry and ventilated place.

XII. Suggestions

* The warranty period of this product is one year, and it is suggested to use the original accessories. For any fault not caused by using the original accessories, it shall be out of the warranty scope.

Manufacturer: Shanghaimuxinmuyeyouxiangongsi

Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.

Imported to AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD

NSW 2122 Australia

Imported to USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim

Place, Rancho Cucamonga, CA 91730

UK REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC REP

E-CrossStu GmbH Mainzer Landstr.69, 60329 Frankfurt am Main.



Technical Support and E-Warranty Certificate www.vevor.com/support