

### Neat Board 50

#### Video conferencing device

Neat Board 50 transforms your meeting space experience by packing powerful technology and pioneering capabilities into an elegant all-in-one design.

It's perfect for bringing superior-quality audio, video and collaboration tools to your huddle, focus and meeting spaces fully managed through Neat Pulse Neat Board 50 includes Screen, Active pen, Camera, Speakers, Microphones and environmental sensors all in one compact design.

Neat Board 50 works standalone or as a companion device with other primary Neat systems. It can also be accompanied by optional Neat Pad Controllers and Scheduling Displays.

### Simple setup

Neat Board 50 comes with everything you need to get started, including active pen, cables and the chosen mounting option.

In the box:

Neat Board 50 w/table stand Ethernet cable: 16.4ft (5m) Power cord: 9.9ft (3m)

Neat marker 2

FlowStand (optional)

Wall mount (optional)

Table stand (included)







### Neat marker 2

Neat Board 50 comes with a pressure sensitive active marker that enables a natural hand wrighting experience.


It has a tail end erazer, and magnetically attaches to the bottom of Neat Board. It's powered by an long lasting replacable AAA battery.



Marker batteries should not be exposed to excessive heat such as sunshine, fie, or the like. Dispose of used battery promptly and correctly, according to local environmental laws and guidelines in force. Risk of fie or explosion if the battery is replaced by an incorrect type. Use consumer grade, non-rechargeable carbon-zinc or alkaline batteries AAA type.




# Mounting options

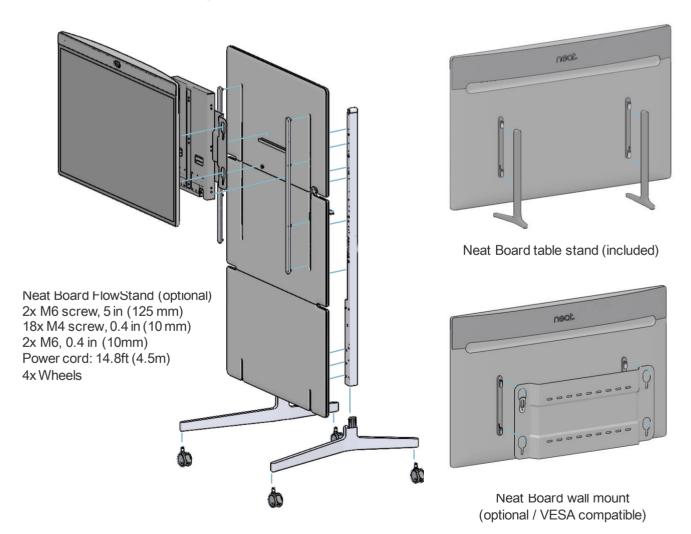



Screws for mounting to the wall are not included. Mounting on a wall should only be performed by qualified personnel in line with applicable facility and state regulations. The wall and the mounting equipment must safely withstand the load of the product.

# Size & weight

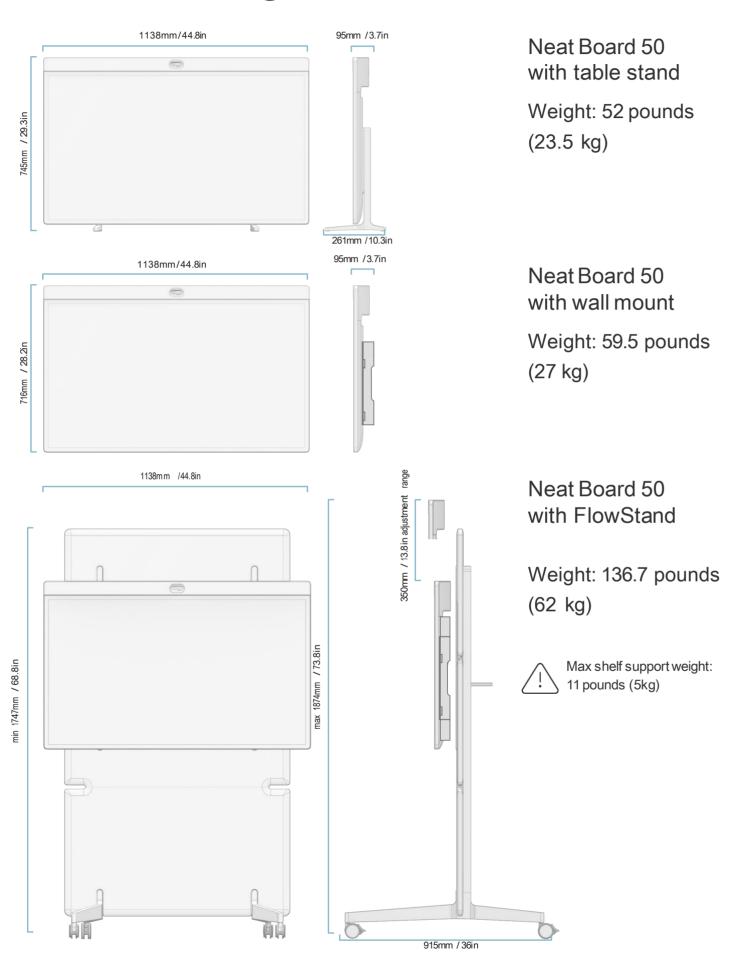


## Setup & connectivity

#### Setup

Use the provided cables to set up the system. Connect the cables according to the illustration. Cables marked — are included. Cables marked are optional and not required for basic use of the system.

Requirements for a complete setup

Internet connection Video service

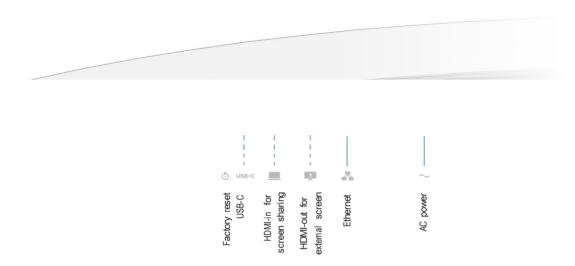



The 16.4ft (5m) Ethernet Cable provided is not to be used for in-wall installation. In-wall cable routing should only be performed by qualifi personnel using appropriate equipment.

#### **Environmental Requirements**

Ambient operating temperature:

32° to 95° F (0° - 35° C)

Storage temperature: -4° - 140° F (-20° - 60° C)

Relative humidity: 10% to 90%

Additional Product Information

https://neat.no/board50

Neat Board 50 - User Manual rev01