

Smart Lock

Thin and light style

Fully automatic smart lock with one-click locking and unlocking design.




12-digit standard keyboard



One-click locking and unlocking design

Fully automatic one-key linkage system:


It can be triggered by any of the methods including remote control, password, key, or the internal switch. Once triggered, the entire lock body will be opened and closed synchronously in an instant. After locking, both the inner and outer door handles are forcibly locked, which doubles the anti-theft performance, making it both safe and convenient.

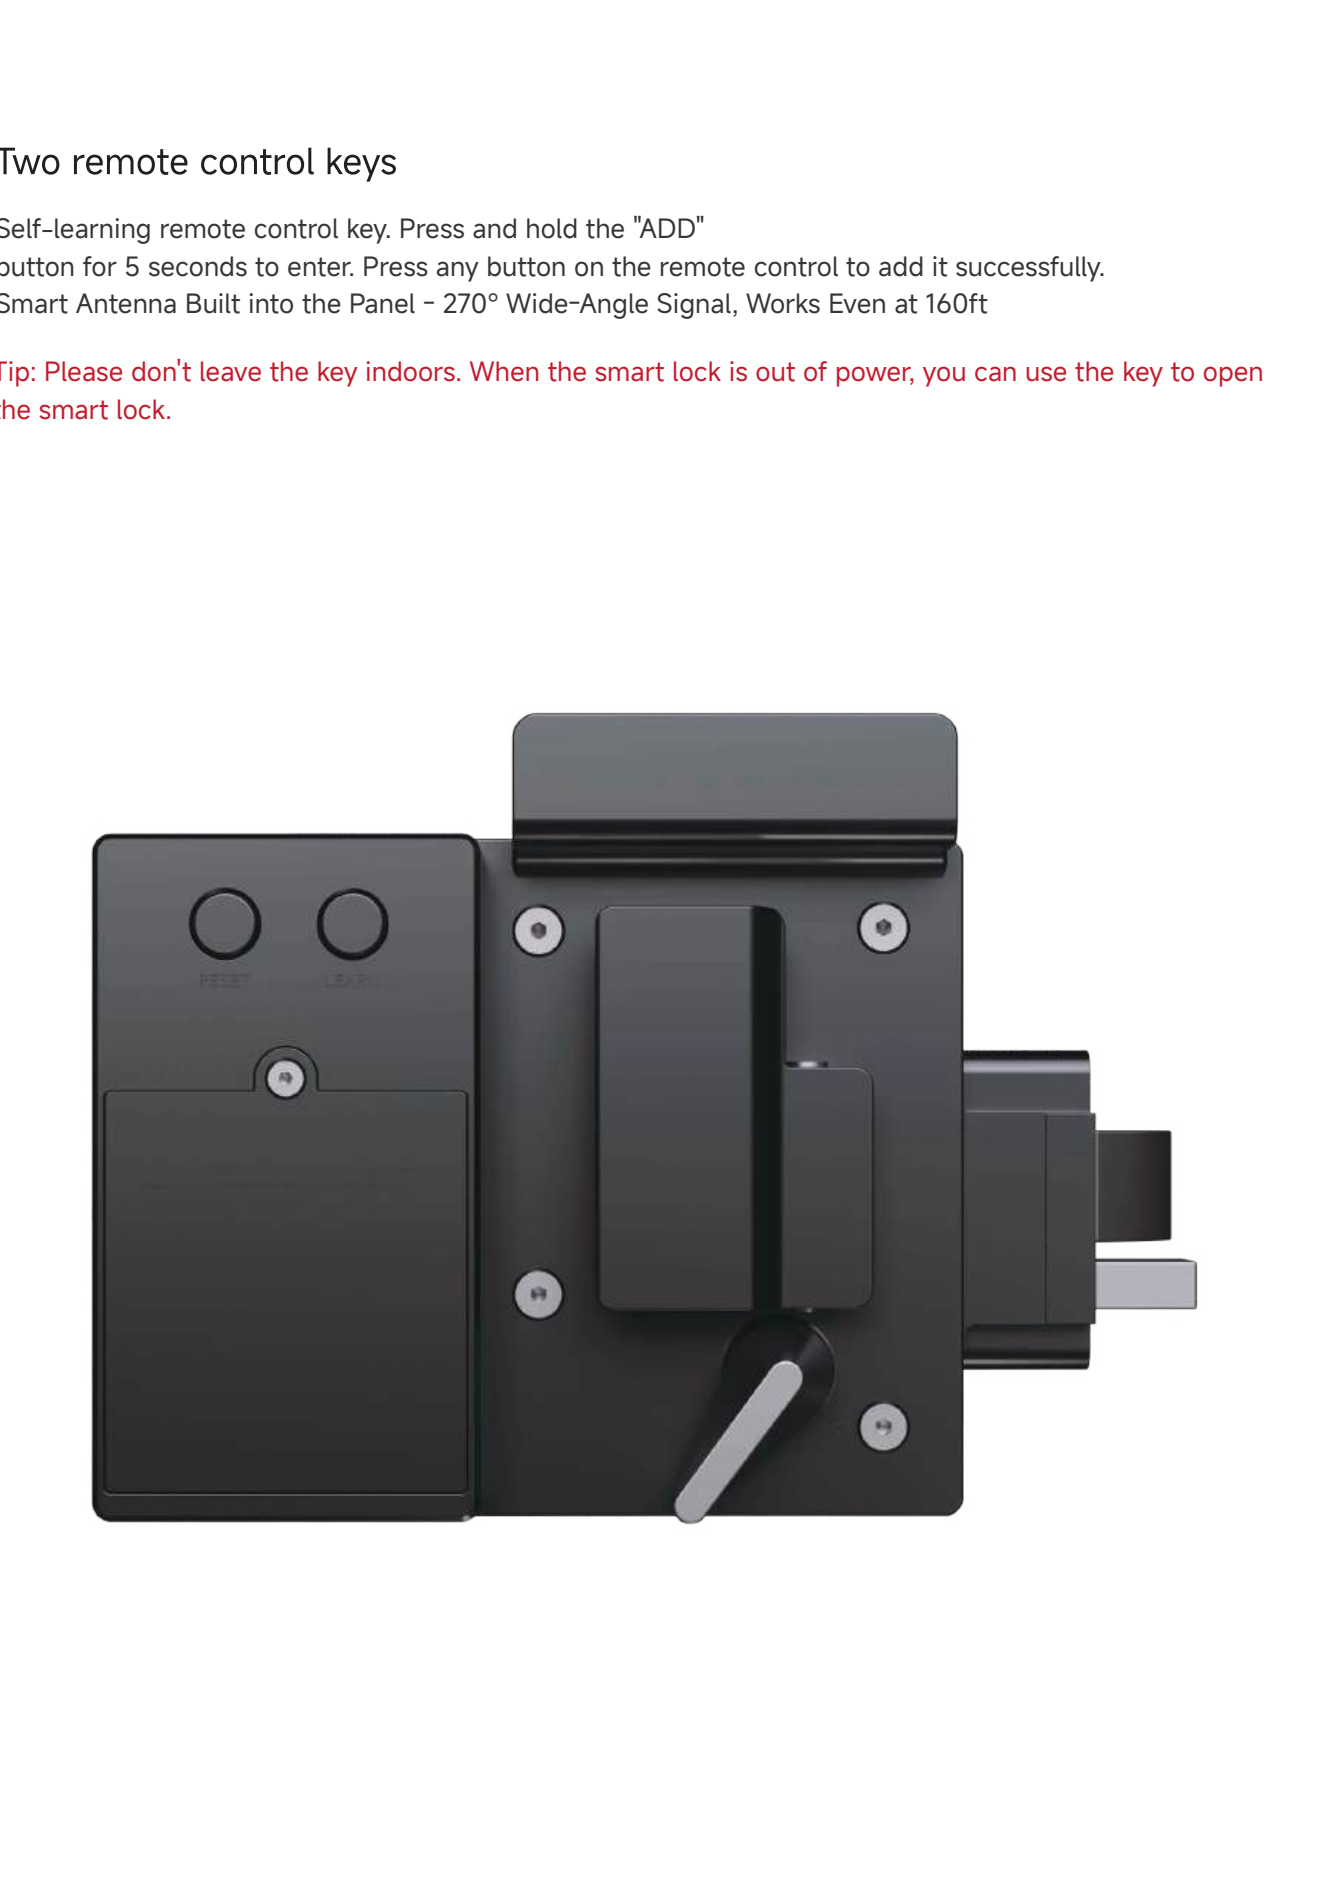

Two remote control keys

Self-learning remote control key. Press and hold the "ADD" button for 5 seconds to enter. Press any button on the remote control to add it successfully. Smart Antenna Built into the Panel - 270° Wide-Angle Signal, Works Even at 160ft

Tip: Please don't leave the key indoors. When the smart lock is out of power, you can use the key to open the smart lock.

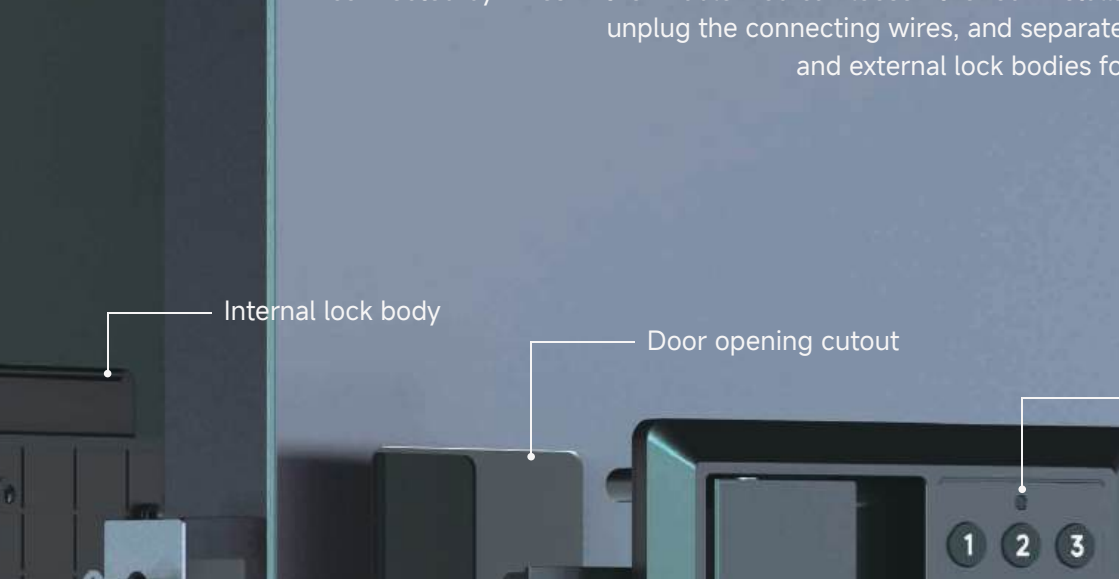

Unlock by password

Input the password on the keyboard and press the "0" button to unlock. Press the "0" button on the keyboard to lock. Press and hold the "ADD" button for 5 seconds to enter. New passwords can be added. After entering the new password, press the "0" button to confirm. The new password is set successfully. Press and hold the "RESET" button for 5 seconds. After hearing a beep, press the "0" button to confirm. The smart lock will restore the initial settings and delete all passwords and remote control keys. There is no password in the initial state. After setting a new password, the initial settings will be automatically exited and the remote control needs to be relearned.

Installation steps

The internal and external lock bodies are designed in a separable way and connected by wires in the middle. You can loosen the four installation screws, unplug the connecting wires, and separate the internal and external lock bodies for installation.



① Remove the original lock. ② Align and install it. ③ Tighten the screws. It is suitable for standard handles (3.75"×2.75"×1.5"). Professional tools are not needed throughout the process.

First, install the external lock body into the door opening and adjust its position. Install the Strike plate to fix the external lock body. Do not tighten it for now. Align the internal lock body with the installation screw holes of the external lock body. Connect the middle wire. Pay attention to aligning the installation holes of the latch switch and the internal handle. Then install the four installation screws. Adjust the position and tighten all the screws.




Packaging Accessories

One main unit, two remote control keys, two mechanical keys, four screws, one Pinch Plate, one Strike plate, one screwdriver, two keychains and one instruction manual.

Ultra-thin alloy body

The ultra-thin high-strength alloy panel is 0.39 inches thick (the thinnest in the industry). The panel dimensions are 4.9"×4.3"×0.39 inches (length×width×height). It is equipped with a military-grade powder coating, which is waterproof, resistant to high temperatures up to 120°C, resistant to acid and alkali corrosion, and can withstand aging caused by ultraviolet rays.

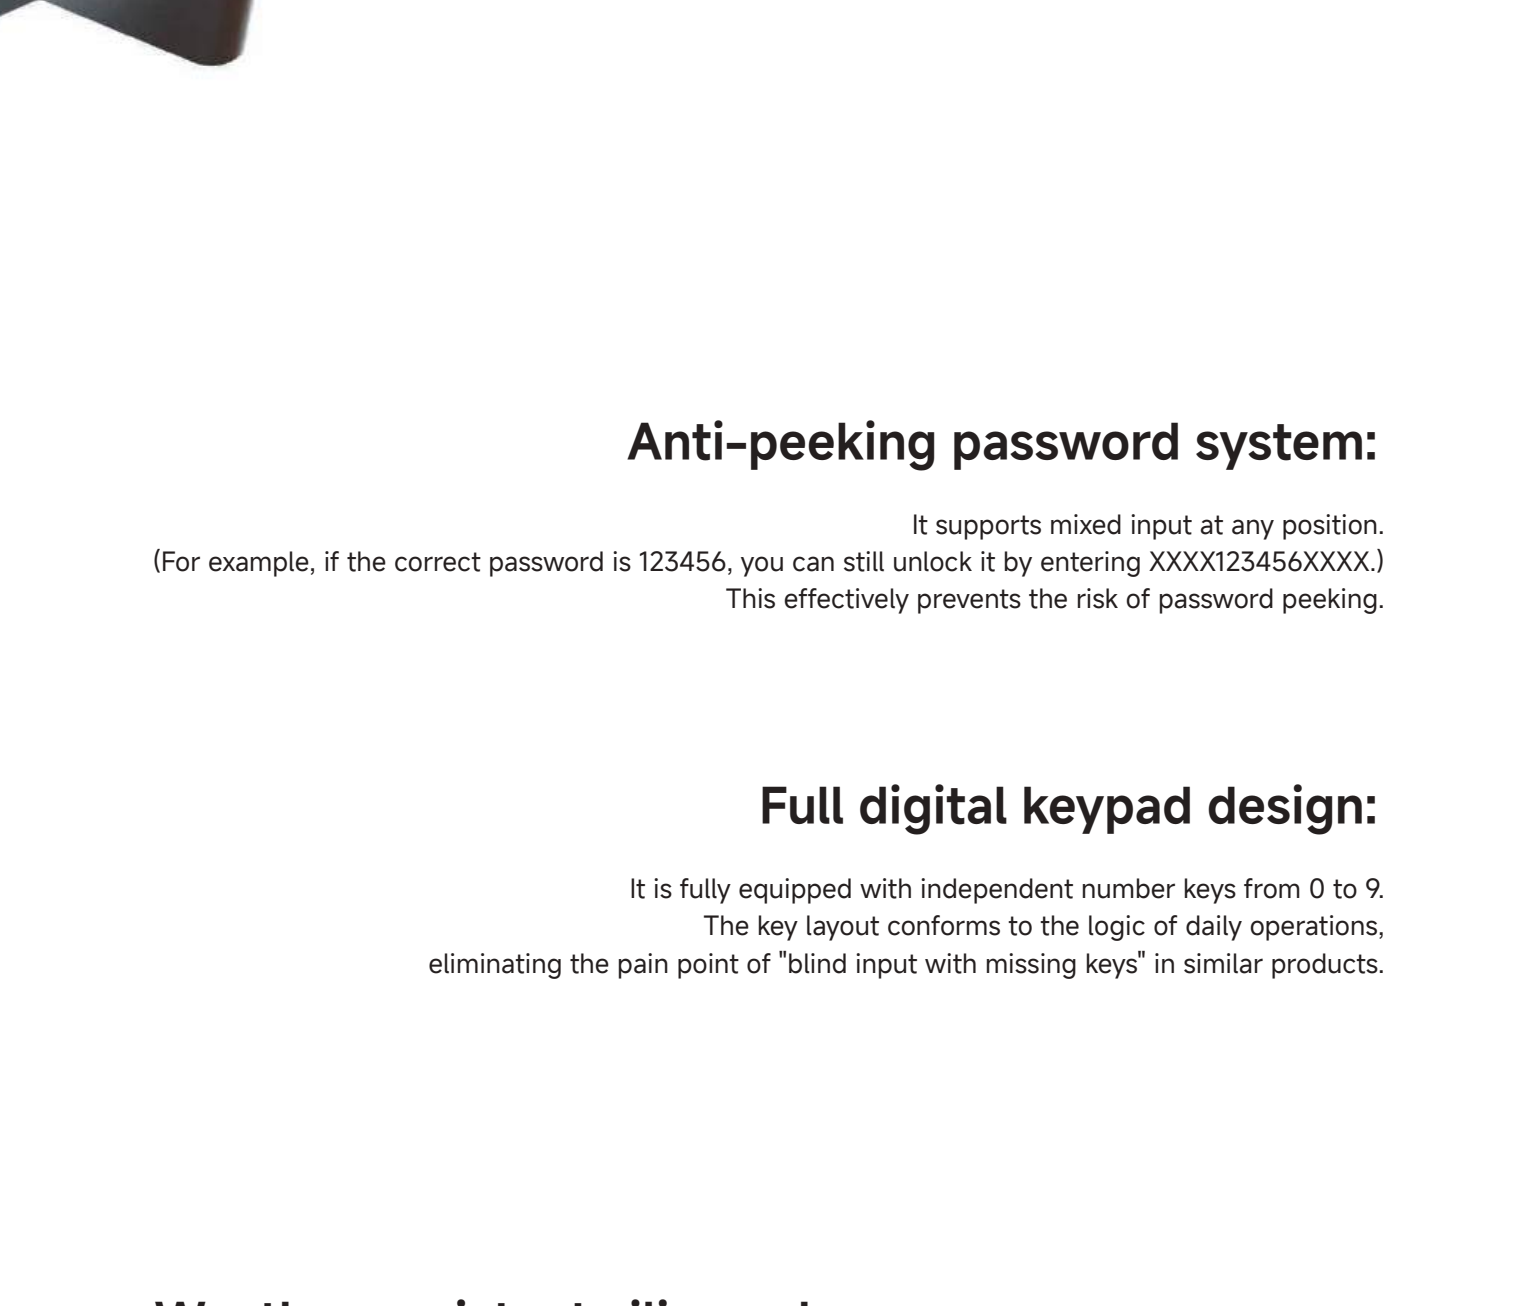

Anti-peeking password system:

It supports mixed input at any position. (For example, if the correct password is 123456, you can still unlock it by entering XXXX123456XXXX.) This effectively prevents the risk of password peeking.

Full digital keypad design:


It is fully equipped with independent number keys from 0 to 9. The key layout conforms to the logic of daily operations, eliminating the pain point of "blind input with missing keys" in similar products.

Weather-resistant silicone keys:

The external keyboard area is made of flexible silicone material, which is waterproof, resistant to freezing and cracking, high-temperature resistant, anti-aging, and has a sensitive touch. It can still respond stably in harsh environments ranging from -40°C to 80°C.

Internal lock body structure

The latch switch adopts a bright reflective process, so it can be accurately found even in an environment with poor lighting.

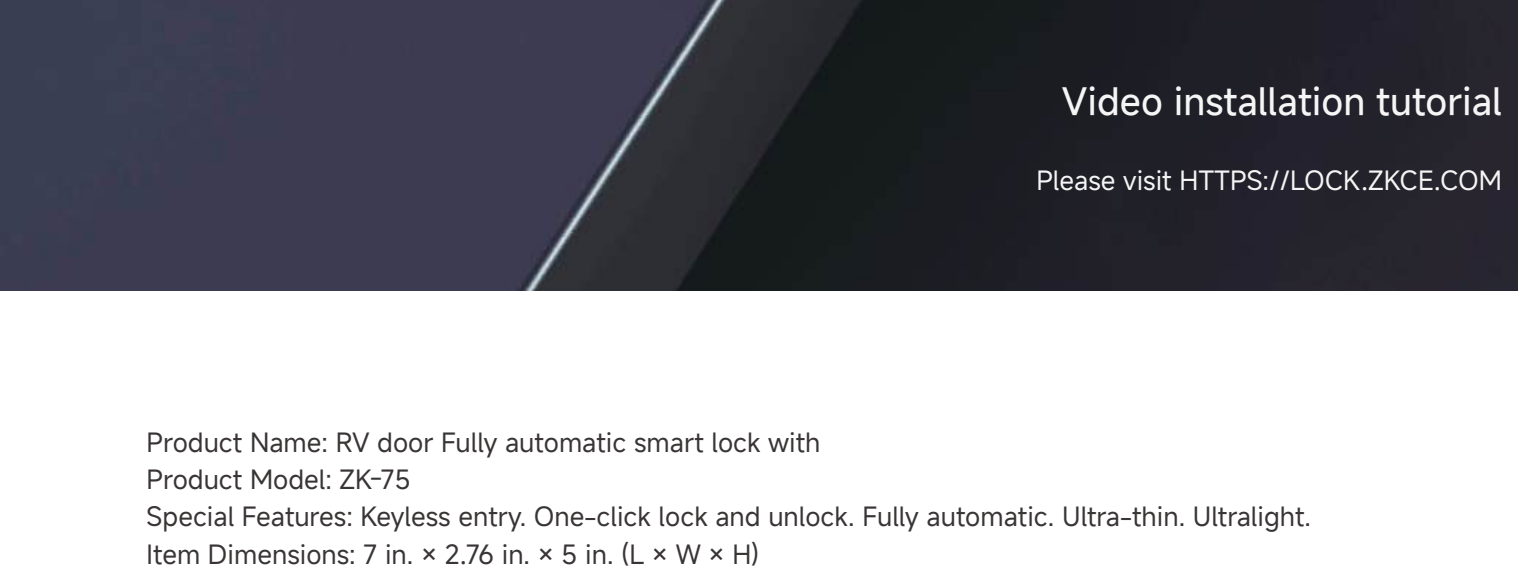

Video installation tutorial

Please visit [HTTPS://LOCK.ZKCE.COM](https://lock.zkce.com)

Product Name: RV door Fully automatic smart lock with
Product Model: ZK-75
Special Features: Keyless entry. One-click lock and unlock. Fully automatic. Ultra-thin. Ultralight.
Item Dimensions: 7 in. × 2.76 in. × 5 in. (L × W × H)
Material: All high-strength metal bodies and silicone buttons.
Surface Process: Electroplating, anodizing, and polishing.
Control Method: Mechanical keys, remote fob, keypad passwords, and deadbolt switch.
Item Weight: 1.3 pounds
Country of Origin: Made in China
Lock Hole Opening Size: 3.75 in. × 2.75 in. × 1.25-1.5 in. (Height * Width * Door thickness.)
Batteries Required: 4 × AA batteries.
Included Components: 2 keys, 2 remotes, 1 smart lock, 1 pinch plate, 1 strike plate, 6 screws, and 1 user guide.

Tip: Please don't leave the key indoors. When the smart lock is out of power, you can use the key to open the smart lock.

© The design team of ZKCE.COM has redesigned a brand-new RV door lock.