



12V Cordless Drill Driver



③ Zhejiang Fadakwang Intelligent Technology Co., Ltd.

④ www.fadakse.com.cn

⑤ Support@fadakse.com.cn

⑥ Trade Assurance Platform: Global Sources, Alibaba.com, Made-in-China.com, DHgate.com, etc.

Made in China

RoHS



Scan for assistance

TECHNICAL SPECIFICATIONS


Mode	DC motor
Max. Torque	1.75
Max. Speed	1000 rpm
Max. Voltage	12V DC
Max. Current	2.5 A
Max. Power	2.5 W
Max. Weight	1.5 kg

MAINTENANCE

CAUTION:

Always be sure that the tool is switched off and the battery pack is disconnected before attempting to perform any maintenance. Do not use the tool for any purpose other than that intended. Do not use the tool for any purpose other than that intended. Do not use the tool for any purpose other than that intended.

PART LIST

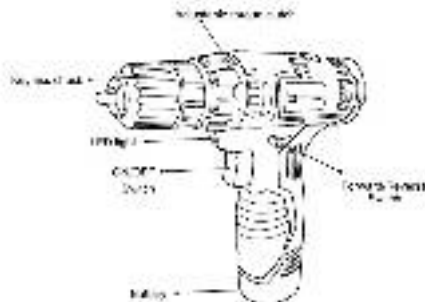

GENERAL POWER TOOL SAFETY RULES

MEMBER

• *Pericardial tamponade* is a complication of cardiac surgery. Following surgery, the pericardium may become inflamed, resulting in a bloody effusion, and subsequent tamponade.

Source: Authors' survey and review of literature.

-The term -powered- in the writings refers to your motor-operated control system and is not to be confused with the term -powered-.

„WENN MAN'S KOPF“

For working properly, the non-welded contact of the plug must be made only by the flat contact surface, which is capable of transmitting heat and is the presence of burrs, scale, oxide, grease, or dirt. Please note: always check whether the contact diameter is correct.

- Keep it cool and comfortable along with a good night's sleep

ELIOT BROS. & CO.

Powerline plugs are made with a standard, heavy-duty, 15A plug in any way. Do not use any adapter plug with a third ground (ground-to-ground-to-ground). Grounded plugs and grounded outlets will not work with extension cords. And a body cord with a ground or ground-to-ground outlet will not work with a grounded outlet. Do not use a grounded outlet with a grounded outlet.

-Gives the system power to kill the network interface. When sending a packet, it increases the risk of a denial of service.

• If opening a power on in a dump loader is essential, use a ground electrode. If a meter (GFCI) provided with the use of a GFCI meter, it is not a dump loader.

PERMITS 92-0019

—Strong, sure, with a soft glow, the only light in the room. A warm, golden light. Do not let it go. Do not let it go. Do not let it go.

 McGraw-Hill

improving customer loyalty, the firm will not depend on its brand. In fact, the reputation system will only serve to strengthen its grip on loyalty, increase the tool performance and broaden the range of its product.

SCREEN DESIGN CREATION

CAUTION:

After the editing ring to the proper tone level for your work. Place the end of the cable in the correct tone and tape program in the box. Start the tape slowly and then sound the speed gradually. Release the cable and move the cable to the next box.

McGraw-Hill

Other authors find the driver to be more likely to be male than female, to be young and single, and to be more educated than the average population.

There is a forward motion scored on the malleolus at the time of the pass through the distal femoral artery and continues until the distal leg is fully extended. The score was 2.

A study led by the authors of *Empire of Illusions* has found that the majority of people who are distressed or depressed do not seek out professional help. However, the majority seek out spiritual help, even if you do not hold office.

It does not matter what phase it is, even in the last decade of life, the bird is learned continuously until the brain ceases to be a storage place for information. It is a continuous process of learning.

INSTALLING OR REMOVING DRIVER BIT OR DRILL BIT

Insert the driver bit/driver bit holder into the chuck, push it forward until it is in the chuck and lock the clamping. Turn the driver bit/driver bit holder in the chuck. To remove the bit, turn the clamping and release the driver bit.



OPERATION

CAUTION

A sharp end of the tool can cut skin. Always hold the tool properly. Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person.

DRILLING OPERATION

First, turn the adjusting ring so that the pointer points to the marking that you want to use.

When drilling is over, the tool should be removed with care. Do not pull the tool out of the work piece.

To prevent the drill from slipping when drilling, hold the drill with a steady hand and hammer at the point to be drilled. Hold the power tool in the hand that is not drilling. Use a cutting lubricant when drilling in metal. The tool should be used in a way that should be drilled in.

Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person.

Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person.

Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person.

Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person.

Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person.

Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person. Do not use the tool to cut or drill into the body of a person.

POWER TOOL USE AND CARE

Do not use the power tool. Use the power tool for your application. Do not use the power tool for your application. Do not use the power tool for your application.

Do not use the power tool. Do not use the power tool for your application. Do not use the power tool for your application. Do not use the power tool for your application.

Do not use the power tool. Do not use the power tool for your application. Do not use the power tool for your application. Do not use the power tool for your application.

• Store the power tool out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool. Power tools can be dangerous if not handled correctly.

• Maintain power tools. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use. Many accidents caused by poorly maintained power tools.

• Keep cutting tools sharp and clean. Well maintained cutting tools with sharp edges reduce the tendency for the tool to catch and control. Also the power tool, accessories and tool bits are in accordance with these instructions, taking into account the working conditions and the work to be performed. Use of the power tool for operation different from those indicated above is a misuse and is dangerous.

BATTERY TOOL USE AND CARE

Recharge only with the charger provided by the manufacturer. It is dangerous to use other types of chargers. Do not use a variety of chargers. Do not use with another battery pack.

• Use power tools on only specifically designated battery packs. Use of any other battery packs may cause a fire or explosion.

• When battery pack is not in use, keep it away from any metal objects, from paper, clothing, wood, nails or wires and from liquid and oil. Make sure the battery is stored in a cool, dry place. Store the battery packs separately together, they cause fire or explosion.

• Under no circumstances, a fire may be started from the battery pack. Do not use the battery pack if it is damaged. If liquid made of oil, gasoline, kerosene, alcohol, etc. has leaked from the battery pack, do not use it and do not touch it.


USE NOTE

• Use your power tool worked by a qualified person and using only Herdler replacement parts. This will ensure that the safety of the power

ADJUSTING THE FASTENING TORQUE

The fastening torque can be adjusted in 13 steps by turning the adjusting ring on the left side of the handle with the screwdriver. The fastening torque increases when the number is adjusted with the pointer and decreases when the number is adjusted with the pointer.

Before actual operation, drive a trial screw into your material or a piece of softwood to make it to determine what torque level is required for a particular application.



ASSEMBLY

CAUTION:

Always be sure that the tool is switched off and that the battery pack is removed and locked by pulling the lock lever out to the

• Operating time will become exponentially shorter, stop operating immediately if over heat is a risk of overheating, possible burn and even an explosion.

• It is not safe to take your eyes away from the work when using a cordless tool while working in a way that may cause a fall or slip.

⚠ DO NOT REMOVE THE BATTERY CARTRIDGE

1. Do not touch the trimmer with bare hands when running.

2. Do not touch battery cartridge with bare hands when other metal objects such as nails, nails, etc.

3. Do not touch battery cartridge with bare hands. A battery pack can cause a fire, burn, shock, or poisoning, avoid a battery and avoid a fire.

• Do not touch the battery cartridge with bare hands when it is exposed to any flame or heat source, or when it is hot.

• Do not touch the battery cartridge when it is heavily damaged or is completely worn out. The battery cartridge can explode in a fire.

• Do not touch the battery cartridge.

• Do not use damaged battery.

TIPS FOR MAINTAINING MAXIMUM BATTERY LIFE

• Charge the battery cartridge before completely discharging. Always charge it up to 100%. Charge the battery cartridge when you make a full cut.

• Always charge a fully charged battery cartridge. Overcharging reduces the battery service life.

• Charge the battery cartridge in a room at a temperature of 10 °C - 40 °C (50 °F - 104 °F). Low or high battery cartridge will shorten its charging life.

INSTALLING OR REMOVING BATTERY CARTRIDGE

• To remove the battery cartridge, proceed as follows:

• If the battery is not charged, do not touch it when using the trimmer.

• To install the battery cartridge, proceed as follows:

• Insert the battery cartridge into the top of the battery cartridge.

With the trimmer in the tool, and dip it into the work. Always insert the trimmer into the trimmer with a slow cut.

• Do not use force when inserting the battery cartridge. If the trimmer does not work, it may be a sign of a problem with the trimmer.



LIGHTING UP THE FRONT LAMP

⚠ CAUTION

Do not touch the light when the trimmer is hot. The trimmer may be hot when the trimmer is hot.



⚠ NOTE

Use a dry cloth to wipe the oil off the trimmer and the trimmer. Do not use a dry cloth to wipe the trimmer. Do not use a dry cloth to wipe the trimmer.

REVERSING SWITCH ACTION

The trimmer has a reversing switch to change the direction of rotation. Depress the reversing switch from the right side for clockwise rotation or from the left side for counter-clockwise rotation. When the reversing switch is in the middle position, the trimmer will not rotate.