




P10PS-JA-452G

Gvision's P10PS is a 10" touch screen display designed specifically for use in rugged and harsh point-of-sale (POS) environments where space is at a premium. This unit is an ideal solution for customer facing applications where user input is required or when you need multi-media capabilities. The display can easily be mounted on a wall, base, or articulated arm using the included VESA mounting options.

DIMENSION

Unit: Inch

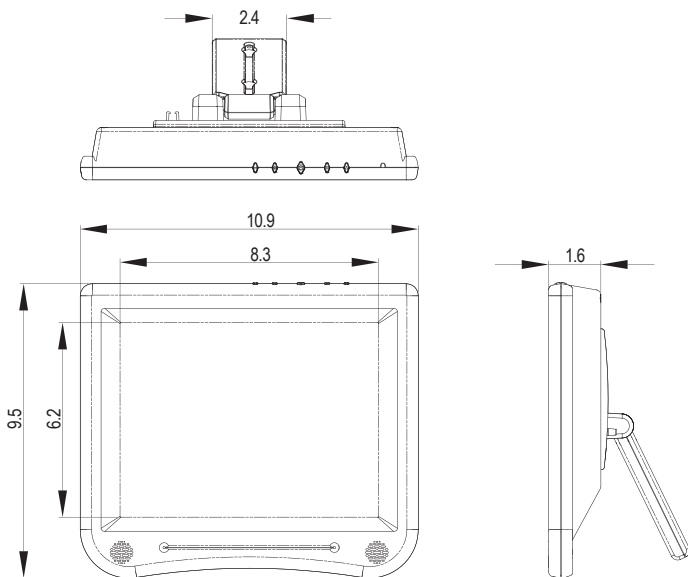

FEATURES

- 10.4-Inch Screen Size / 800 x 600 Screen Resolution
- LED Backlight Unit
- 5-Wire Resistive Touch Technology / RS232 Serial Port
- Windows / Linux / Android / Mac OS Compatible
- Spill & Dust Resistant
- Video Signal: VGA (15 Pin D-Sub)
- Integrated Speakers
- Design to Operate 24 / 7 / 365
- 3-Year Warranty

SPECIFICATIONS

| DISPLAY | P10PS-JA-452G |
|----------------------|-------------------------------------|
| Screen Size | 10.4 In |
| Resolution | 800 x 600 |
| Backlight | LED |
| Aspect Ratio | 4 : 3 |
| Viewing Angle | 160° / 150° |
| Brightness | 250cd/m ² |
| Contrast Ratio | 400 : 1 |
| Color Depth | 262K |
| Response Time | 15ms |
| Display Area (H x V) | 211.2 x 158.4 mm |
| INTERFACE | |
| VGA (15 Pin D-Sub) | 1 |
| Audio | 1 |
| RS232 | 1 |
| TOUCH TECHNOLOGY | |
| Technology / Type | Resistive / 5-Wire |
| Port | RS232 Serial |
| Support OS | Windows / Linux / Android / Mac |
| AUDIO | |
| Speaker | 1W / Per Channel Driver |
| CABINET | |
| Material | Plastic |
| Color | Black |
| POWER | |
| Consumption | < 36W |
| Electrical Ratings | DC 12V/3A (AC 100V ~ 240V, 50/60Hz) |
| TEMPERATURE | |
| Operating | 32° F ~ 104° F (0° C ~ 40° C) |
| Storage | -4° F ~ 140° F (-20° C ~ 60° C) |
| Humidity | 20% ~ 80% |
| DIMENSIONS (WxHxD) | |
| Inch (in) | 10.9 x 9.5 x 1.6 |
| Millimeter (mm) | 278 x 242 x 43 |
| WEIGHT | |
| Net Weight | 3.6 lbs (1.64kg) |
| CERTIFICATION | |
| Certified | CE / FCC / UL / cUL |
| VESA™ | |
| Mount Size (mm) | 75 x 75 |

Specifications subject to change without any notice