

KEY BENEFITS

NODE-BT App

Controller schedule and sensor settings are managed via the NODE-BT app and serve as a remote control for an unlimited number of devices.




Manual Operation

NODE-BT's simple interface acts as a diagnostic tool for quicker troubleshooting.



Controller Design

NODE-BT is available in 1-, 2-, and 4-station models.

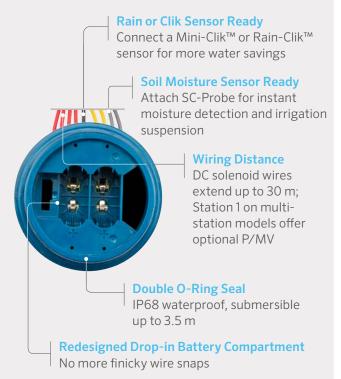

Redesigned Seal

Durable cap and ring are quick to remove and prevent corrosion and water intrusion.







IN THE FIELD


1 Challenge: Battery-operated controllers require locating the valve box, reaching inside a dirty opening, and programming the controller using a dark screen and buttons.



Solution: Avoid the valve box with the NODE-BT app, allowing full programming from up to 15 m away. You can also save each controller's location.

Challenge: Battery-operated controllers require periodic battery replacement, leaving plants to suffer if maintenance is missed.

Solution: Only the NODE-BT accepts up to two 9V batteries, extending the time between service intervals.



IN THE DESIGN OFFICE

- Pre-program the controller schedule and password protect the unit before installation to reduce site changes.
- Quickly verify operation with the Event Logger, which details the previous 100 controller events. Share this information as needed with the site owner or maintenance crew.

Speed up controller programming with pre-saved schedules that are transferable to any NODE-BT controller in seconds.



BLUETOOTH BATTERY-OPERATED CONTROLLER COMPARISON

	FEATURES	NODE-BT	Competitor 1	Competitor 2
•	9 Bluetooth performance and range			
MOBILE APP	View system status, total watering time, and next start time	•		
	App shows the last battery-change date and sends reminders	•		
	Ability to upload zone images, rename stations, programs, and controllers	•		
	Review up to 100 irrigation events	•		
IRRIGATION	Run times from 1 second to 12 hours	•		
	0-300% monthly seasonal adjust	•	•	•
	Cycle and soak to prevent runoff	•		
	Soil moisture sensor capable	•		
LLER	Physical start/stop buttons on the controller	•		
CONTROLLER	Battery indicator on the controller	•		
COL	Rugged cap with double O-ring seal	•		

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG Inc. and any use of such marks by Hunter Industries is under licence.

