
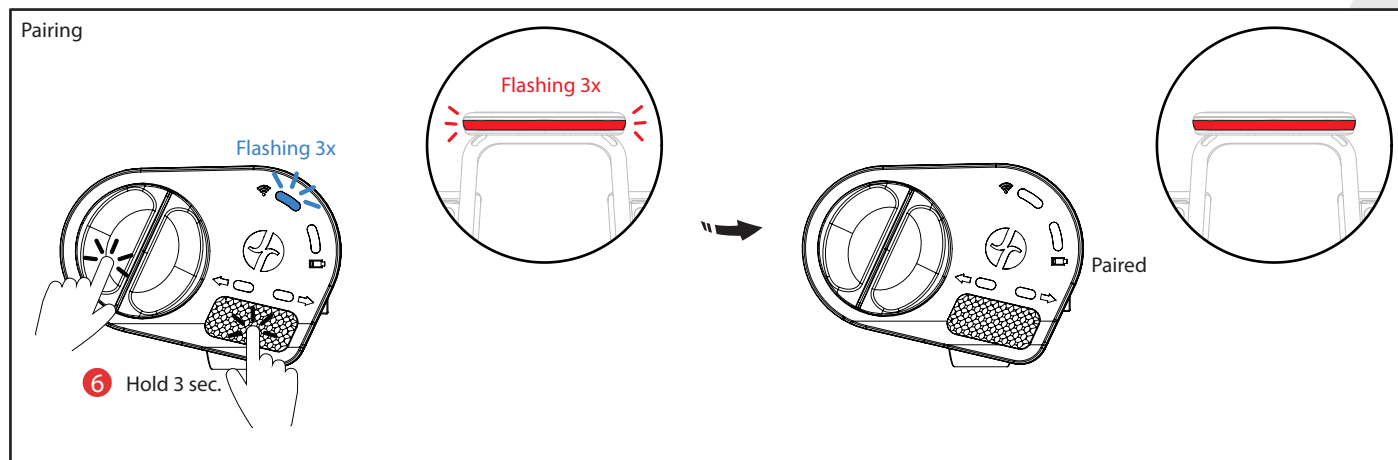
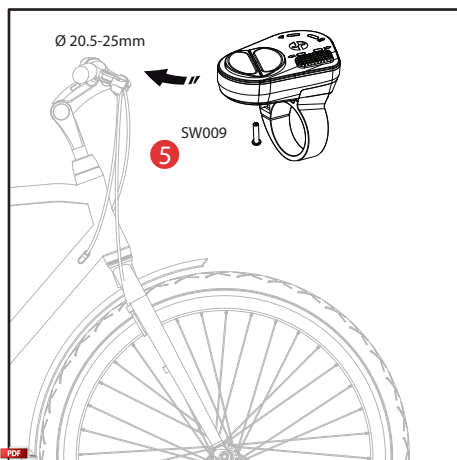
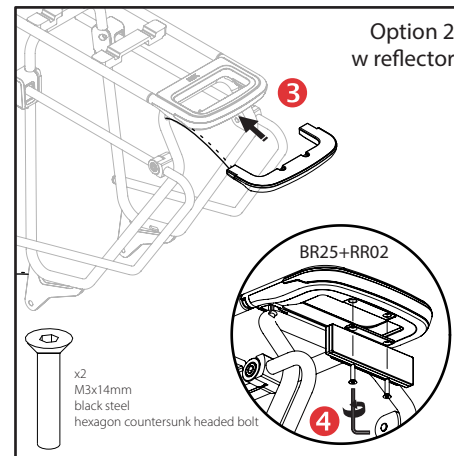
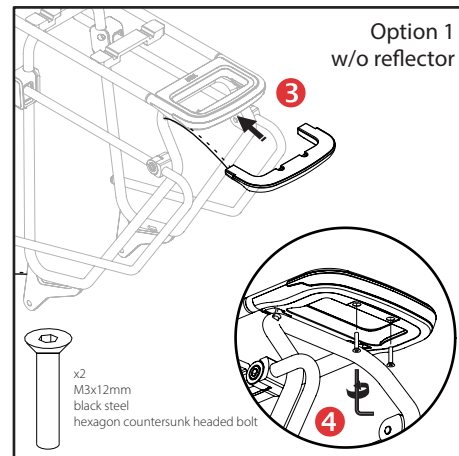
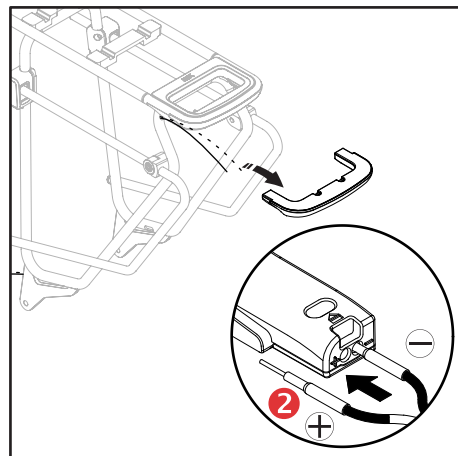


GLOW STOP-LIGHT INDICATOR E-BIKE

Instruction manual

1/2


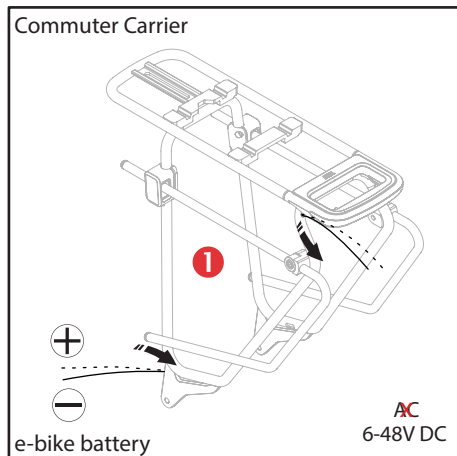


GLOW STOP-LIGHT INDICATOR E-BIKE



Instruction manual

2/2



Function: left indication

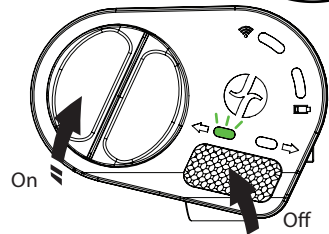



Function: right indication

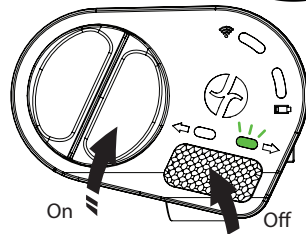


Function: warning light

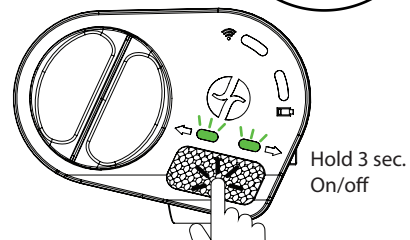

Function: stop-light




Maintenance

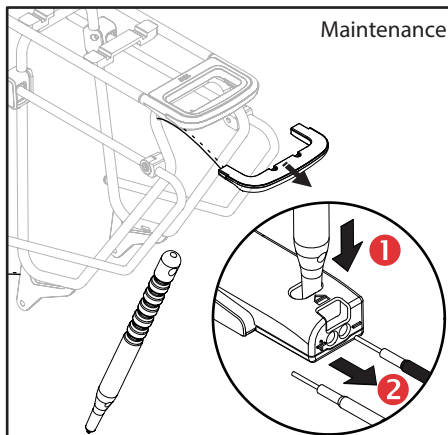

Spanninga Glow operating tool: contact us for more information

Wire recommendations

- 24AWG or 22AWG
- standard length: 1.2m or 1.5m / other TBD
- (a) standard finish pre-stripped & tinned on $11,5(\pm 0,5)\text{mm}$
- (b) standard finish pre-stripped & tinned on $5(\pm 0,5)\text{mm}$
- (c) shrink sleeve on $15(\pm 0,5)\text{mm}$
- (d) wire coverage by shrink sleeve $\varnothing 2\text{mm}$ on $5(\pm 0,5)\text{mm}$
- (e) exposed wire $\varnothing 0,7(\pm 0,1)\text{mm}$ on $6,5(\pm 0,5)\text{mm}$

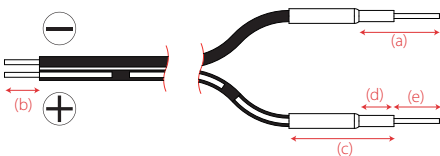

Runtime: 2 months

