

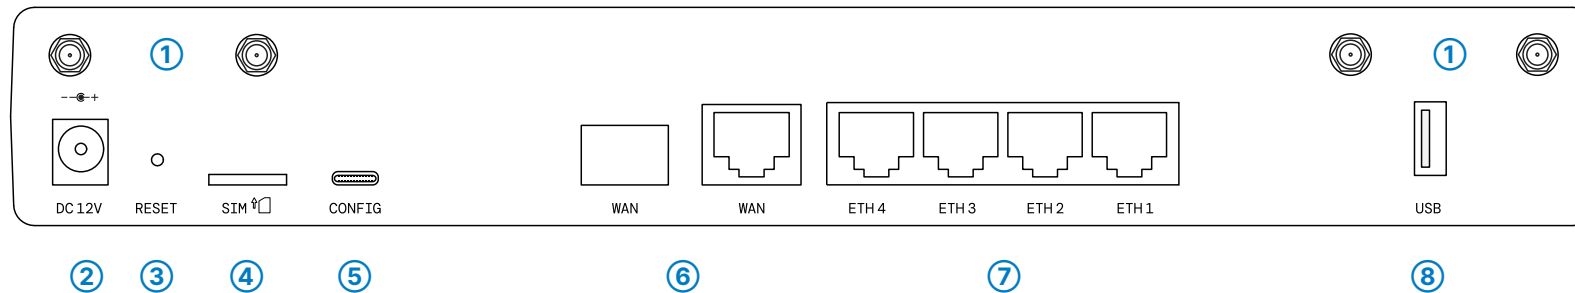


Hardware Quick Reference


LANCOM 1800EFW-5G



- 1 5G antenna connectors**
Screw the supplied mobile radio antennas to the appropriate connectors.



- 2 Power supply connectio socket**
Use only the supplied power adapter!



- 3 Reset button**
Short press > device restart
Long press > device reset



- 4 Micro SIM card slot**
Slide the SIM card into the SIM card slot using the marker to ensure that the card is the right way round. Ensure that the SIM card clicks into place on insertion.




To remove the card from the device, press the card lightly into the device. Let go to release the SIM card from the slot.

- 5 Serial USB-C configuration interface**
A USB-C cable can be used for optional configuration of the device on the serial console. (cable not included)



- 5 WAN interfaces (SFP / TP combo port)**
Insert a suitable LANCOM SFP module (e.g. 1000Base-SX or 1000Base-LX) into the WAN SFP interface. Choose a cable compatible with the SFP module and connect it as described in the SFP module's mounting instructions www.lancom-systems.com/SFP-module-MI. (SFP module and cable are not included)




If desired, alternatively connect the WAN TP interface to a WAN modem using an Ethernet cable.



- 6 Ethernet interfaces**
Use an Ethernet cable to connect one of the interfaces ETH 1 to ETH 4 to your PC or a LAN switch.



- 7 USB interface**
Connect a USB data medium or a USB printer to the USB interface. (cable not supplied)



Before initial startup, please make sure to take notice of the information regarding the intended use in the enclosed installation guide!

Operate the device only with a professionally installed power supply at a nearby power socket that is freely accessible at all times.

The power plug of the device must be freely accessible.

Please note that support for third-party accessories is not provided.




Please observe the following when setting up the device

- When setting up on the table, use the enclosed self-adhesive rubber pads, if applicable.
- Do not rest any objects on top of the device and do not stack multiple devices.
- Keep all ventilation slots of the device clear of obstruction.
- Rack installation with the optional LANCOM [CPE blackline Rack Mount](#) / [CPE blackline Rack Mount Plus](#) (separately available)

Hardware Quick Reference

LANCOM 1800EFW-5G



A Power		E ETH1 - ETH4	
Off	Device switched off	Off	No link available or interface switched off
Blue, permanently*	Device ready for operation or device paired and LANCOM Management Cloud (LMC) accessible.	Blue, permanently	Link available, no data transmission
Blue, blinking		Blue, blinking	Data transmission
1x blue, inverse blinking*	Connection to LMC active, pairing OK, device not claimed	F 5G	
2x blue, inverse blinking*	Pairing error or LMC activation code/ PSK not present.	Off	Cellular interface switched off
3x blue, inverse blinking*	LMC not reachable resp. communication error	Blue, blinking	Registration on the mobile radio system in progress
B Online		Blue, permanently	Logon to the mobile radio system successful
Off	WAN connection not active	Blue, flickering	Data transmission
Blue, blinking	WAN connection in progress (e.g. PPP negotiation)	Blue, flashing	Hardware error
Blue, permanently	WAN connection active	Blue, fast flashing	Marginal reception quality
C WAN		G WLAN 1 / WLAN 2	
Off	No link available / interface switched off	Off	No Wi-Fi network defined or Wi-Fi module disabled. No beacons are sent from the Wi-Fi module.
Blue, permanently	Link available, no data transmission	Blue, blinking	DFS Scanning or other scan process
Blue, flickering	Data transmission	Blue, permanently	At least one Wi-Fi network defined and Wi-Fi module activated. Beacons are sent from the Wi-Fi module.
D SFP		H VPN	
Off	No link available / interface switched off	Off	No VPN connection active
Blue, permanently	Link available, no data transmission	Blue, blinking	VPN connection in progress
Blue, flickering	Data transmission	Blue, permanently	VPN connection active

Hardware	
Power supply	12 V DC, external power adapter For an overview of the power supplies compatible with your device, see www.lancom-systems.com/kb/power-supplies .
Environment	Temperature range 0 – 40 °C; humidity 0 – 95 %; non-condensing
Housing	Robust synthetic housing, rear connectors, ready for wall mounting; (W x H x D) 293 × 44 × 190 mm
Fan	1 quiet fan

Interfaces	
WAN (Combo port) SFP / TP	WAN SFP: Slot for small form-factor pluggable Gigabit Ethernet transceiver (mini-GBIC). Compatible with optional LANCOM SFP modules for fiber optic connections. Switched as WAN port at delivery, can be configured as LAN port. WAN TP: 10 / 100 / 1000 Base-TX, Autosensing Full duplex, Auto node hub
ETH	4 individual 10 / 100 / 1000-Mbps Fast Ethernet ports; operate as switch ex-factory. Up to 3 ports can be switched as additional WAN ports.
USB	USB 2.0 Hi-Speed host port for connecting USB printers (USB print server), serial devices (COM-port servers), or USB data media (FAT file system)
Wi-Fi	2 internal dual-band Wi-Fi antennas; frequency bands: 2400 - 2483.5 MHz (ISM) and 5150 - 5725 MHz (country-specific restrictions possible); Radio channels 2.4 GHz: Up to 13 channels, max. 3 non-overlapping (2.4 GHz band) Radio channels 5 GHz: Up to 26 non-overlapping channels (available channels depending on country-specific regulation and associated with automatic, dynamic DFS channel selection); Output power 2,400 - 2,483.5 MHz = 20 dBm Output power 5,150 - 5,350 MHz = 20 dBm Output power 5,470 - 5,725 MHz = 27 dBm
5G	4 SMA connectors for the supplied dipole rod antennas, suitable LANCOM AirLancer antennas for 5G or 4G or other manufacturers. Please take into account the legal regulations of your country for the operation of antenna systems (especially antenna gain and transmission power).
Configuration interface	Serial USB-C configuration interface

WAN protocols	
Ethernet	PPPoE, Multi-PPPoE, PPTP (PAC or PNS) and IPoE (with or without DHCP)
Package content	
Cables	1 Ethernet cable, 3m
Antennas	4 5G / 4G antennas for 5G / LTE
Power adapter	External power adapter

*) The additional power LED statuses are displayed in 5-seconds rotation if the device is configured to be managed by the LANCOM Management Cloud.

This product contains separate open-source software components which are subject to their own licenses, in particular the General Public License (GPL). The license information for the device firmware (LCOS) is available on the device's WEBconfig interface under "Extras > License information". If the respective license demands, the source files for the corresponding software components will be made available on a download server upon request.

Hereby, LANCOM Systems GmbH | Adenauerstrasse 20/B2 | D-52146 Wuersele, declares that this device is in compliance with Directives 2014/30/EU, 2014/53/EU, 2014/35/EU, 2011/65/EU, and Regulation (EC) No. 1907/2006. The full text of the EU Declaration of Conformity is available at the following Internet address: www.lancom-systems.com/doc