


# SPECFLEX® T-BAR BRACKET



Figure 2401

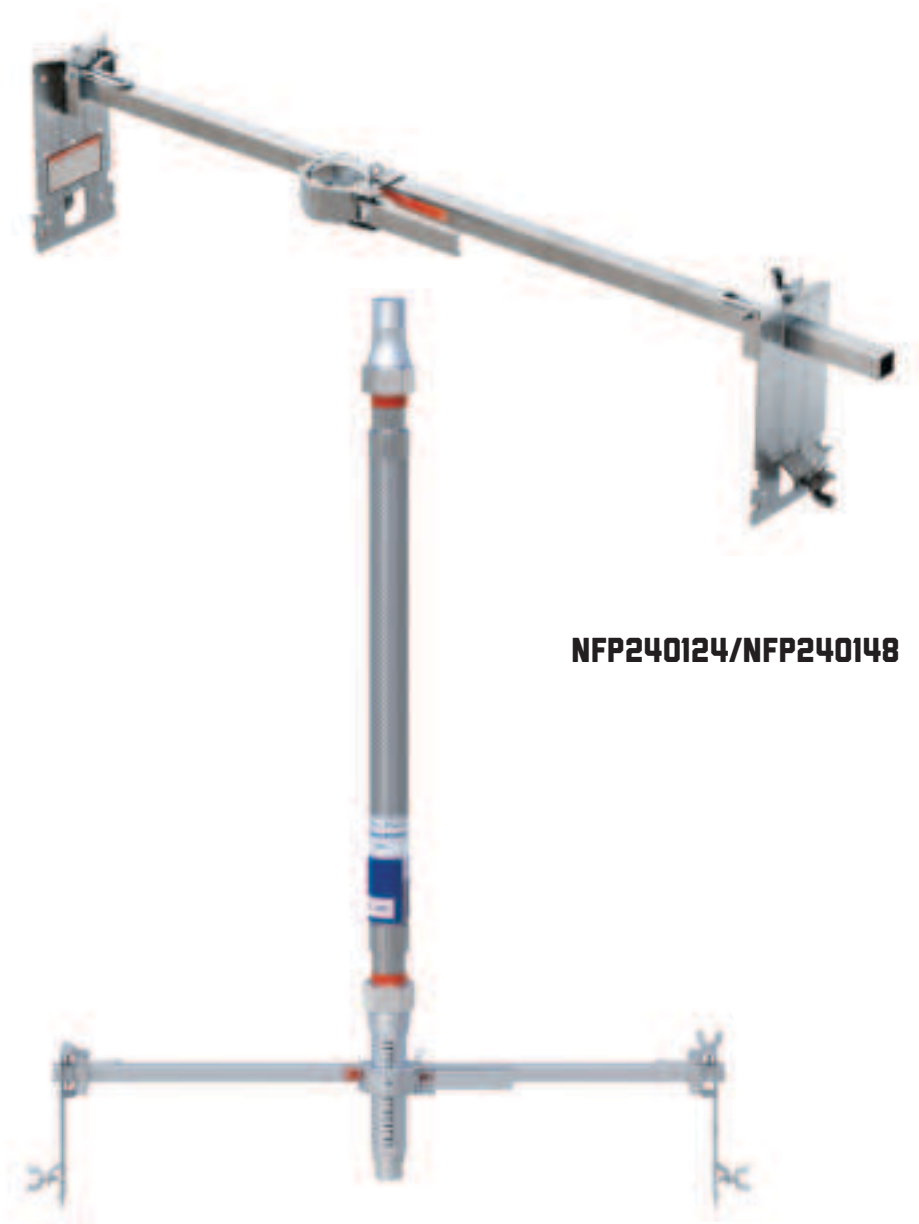

NFP240124/NFP240148

### FEATURES

- Available in 24" and 48" lengths
- One-piece bracket for hard-lid or suspended ceilings
- Includes open gate bracket for easy adjustments
- Comes fully assembled for faster installation
- Center points clearly marked with stickers to eliminate in-field measuring
- Allows for installation before ceiling tiles
- Meets Buy American Act (BAA) requirements

### TECHNICAL DATA

- Material: ASTM-A366
- Bracket thickness: 2.0mm, ± 0.05
- See Specflex® Hose data sheets for UL/FM approved assemblies

### INSTALLATION

- Please refer to NFP Specflex® Installation Manuals for proper installation guidelines

| PART NUMBER | SIZE | ADJUSTMENT RANGE | HEIGHT | MATERIAL          |
|-------------|------|------------------|--------|-------------------|
| NFP240124   | 24"  | 8-3/4" – 27"     | 5-1/2" | Zinc-Plated Steel |
| NFP240148   | 48"  | 25" - 48"        | 5-1/2" | Zinc-Plated Steel |



# SPECFLEX® T-BAR BRACKET



Figure 2401

