

50Hz

# iT0450 Ice Cube Machine

Indigo® NXT™ iT0450 Ice Cube Machine

## Models

☐ IDT0450A    ☐ IYT0450A    ☐ IDT0450W


Indigo NXT Series iT0450  
Ice Machine on D400 Bin

Designed for operators who know that ice is critical to their business, the Indigo NXT Series ice machine's preventative diagnostics continually monitor itself for reliable ice production. Improvements in cleanability and programmability make your ice machine easy to own and less expensive to operate.

- **New levels of Performance** – Showcasing an average of 9% lower energy consumption, up to 12% increase in ice production and a 19% reduction in condenser water usage and a 5% reduction in potable water usage. . This translates into lower cost of ownership over the life of your machine.
- **easyTouch® Display** - New icon based touch screen takes the guess work out of owning and operating an ice machine.
- **Multiple Language Capability** - The easyTouch display is available in multiple languages selected in the initial start-up installation Wizard.
- **Programmable Ice Production** – Now its super easy to program your ice machine to be off at certain times of the day to save money with fluctuating electrical rates. Also programmable by daily ice production volume.
- **Easy to Clean Foodzone** – Hinge front door swing out for easy access. Removable water-trough, distribution tube, curtain, water probe and water pump for fast and efficient cleaning. Selected components are made with AlphaSan® antimicrobial.
- **Intelligent Diagnostics** – Provides 24 hour preventative maintenance and diagnostic feedback for trouble free operation.
- **Acoustical Ice Sensing Probe** – Unique patented technology allows for reliable operation in challenging water conditions and environments
- Available **LuminIce® II Growth Inhibitor** – Controls the growth of bacteria and yeast within the Food zone keeping the machine cleaner longer. A new indicator in the display keeps you abreast of the operational status.



## Ice Machine Electric

230/ 50/ 1

### Minimum circuit ampacity:

Air-cooled: 5.6 amps  
Water-cooled: 5.3 amps

### Maximum fuse size:

Air Cooled: 15 amps  
Water cooled 15 amps

## Specifications

### BTU Per Hour:

3,800 (average),  
and 6,000 (peak)

### Refrigerant:

R410A CFS - Free  
Lowers global warming  
by 48%

### Operating Limits:

- Ambient Temperature Range:  
40° to 110°F (4.4° to 43.3° C)  
Water Temperature Range:  
40° to 90° F (4.4° to 32.2° C)
- Water Pressure Ice Maker  
Water In:  
Min. 20 psi (137.9 kPa)  
Max. 80 psi (551.1 kPa)
- Condenser Water Pressure:  
Min. 20 psi (137.9 kPa)  
Max. 276 psi (1902.95 kPa)

## Ice Shape



**Half Dice**  
3/8" x 1 1/8" x 7/8"  
(.95 x 2.86 x 2.22 cm)  
Cube weight 5.7 g



**Dice**  
7/8" x 7/8" x 7/8"  
(2.22 x 2.22 x 2.22 cm)  
Cube weight 8.5 g



Welbilt Deutschland GmbH  
Auf der Weh 11  
D - 35745 Herborn, Germany  
Tel.: +49 27 72 58 050  
[welbilt.com.de](http://welbilt.com.de)

Welbilt Iberia, S.A.U  
Textil, 6 – Pol.Ind. La Ferreria – 08110  
Montcada i Reixac  
Barcelona, Spain  
Tel.: +34 902 20 10 69  
[welbilt.com.es](http://welbilt.com.es)

Welbilt UK  
Ashbourne HouseThe Guildway,  
Old Portsmouth RdGuildford GU3  
1LRUnited KingdomTel.:  
+44 1483 464900  
[www.welbilt.uk](http://www.welbilt.uk)






# 50Hz

## iT0450 on D-400 Storage Bin

- Ⓐ Electrical Entrance (2) Options
- Ⓑ 3/8" (0.95 cm) F.P.T. Water Condenser Inlet (water-cooled units)
- Ⓒ 1/2" (1.27 cm) F.P.T. Water Condenser Outlet (water-cooled units)
- Ⓓ 1/2" (1.27 cm) Auxiliary Base Drain Socket
- Ⓔ 3/8" (0.95 cm) F.P.T. Ice Making Water Inlet
- Ⓕ 1/2" (1.27 cm) F.P.T. Ice Making Water Drain
- Ⓖ 3/4" (1.91 cm) Bin Drain

**Installation Note**  
Minimum installation clearance:  
Top/side: 12" (30.50 cm)  
Back is 5" (12.7 cm)

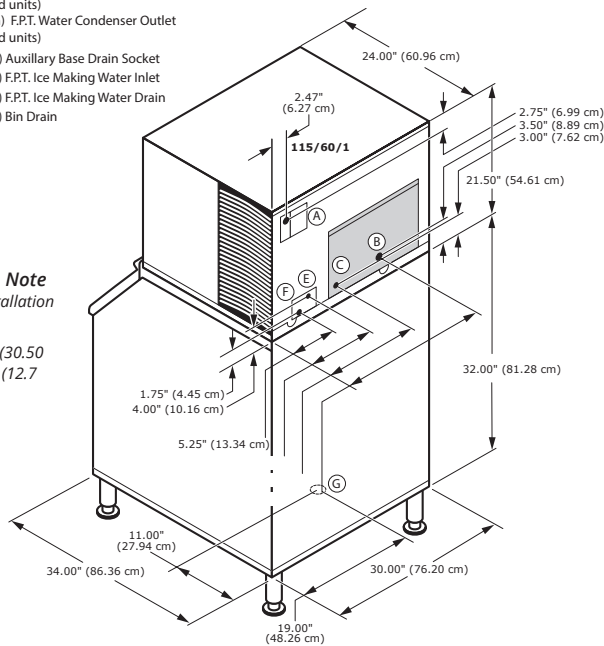




## Space-Saving Design



	iT0450 D-400	iT0450 D-570
Height	59.50" 151.13 cm	71.50" 181.61 cm
Width	30.00" 76.2 cm	30.00" 76.2 cm
Depth	34.00" 86.30 cm	34.00" 86.30 cm
Bin	365 lbs.	543 lbs.
Storage	165.7 kgs.	241.1 kgs.

Height includes adjustable bin legs 6.00" to 8.00", (15.24 to 20.32 cm) set at 6.00" (15.24 cm).  
Bin capacity is based on 90% of the volume x 33 lbs/ft<sup>3</sup> average density of ice.

## Specifications

			Ice Production 24 Hours		Power Usage kWh 45.4 kg / 100 lbs @ 32°Air / 21°C Water 90°Air / 70°F Water	Potable Water Usage/100 lbs. 45.4 kgs. of Ice
	Model	Ice Shape	21°Air / 10°C Water 70°Air/ 50°F Water	32°Air / 21°C Water 90°Air/ 70°F Water	1 Ph	
AIR COOLED	IDT0450A	dice 	440 lbs.	355 lbs.	5.30	19 Gal.
			200 kgs	161 kgs		71.9 L
	IYT0450A	half-dice 	460 lbs.	375 lbs.	5.20	19 Gal.
			209 kgs	170 kgs		71.9 L
WATER COOLED	IDT0450W	dice 	420 lbs.	355 lbs.	4.88	19 Gal.
			191 kgs	161 kgs		71.9 L
	* Water-cooled Condenser Water Usage / 100 lbs. /45.4 kgs. Of Ice: 140 gal/ 530 L.					

\* Water-cooled Condenser Water Usage / 100 lbs. /45.4 kgs. Of Ice: 140 gal/ 530 L.

Order separately: Ice storage bin for all units  
This product is hermetically sealed and contains fluorinated greenhouse gas R410A

## Accessories

**LuminIce® II Growth Inhibitor**  
reduces yeast and bacteria growth for a cleaner ice machine.



**External Scoop holder**  
Protect the ice scoop with the NSF approved versatile scoop holder.



**Arctic Pure® Plus Water Filters**  
reduce sediments and chlorine contaminants down to .5 microns. Use with a Pre-filter is recommended.



Welbilt reserves the right to make changes to the design or specifications without prior notice.

**Welbilt Deutschland GmbH**  
Auf der Weih 11  
D - 35745 Herborn, Germany  
Tel.: +49 27 72 58 050  
welbilt.com.de

**Welbilt Iberia, S.A.U**  
Textil, 6 - Pol.Ind. La Ferreria - 08110  
Montcada i Reixac  
Barcelona, Spain  
Tel.: +34 902 20 10 69  
welbilt.com.es

**Welbilt UK**  
Ashbourne HouseThe Guildway,  
Old Portsmouth RdGuildford GU3  
1LRUnited KingdomTel.:  
+44 1483 464900  
www.welbilt.uk

