


# CruiseCam X3

User Manual

BOULT

## Know your CruiseCam X3

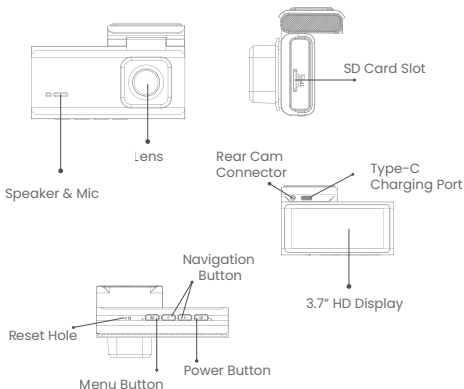

## What's in the box?

Dashcam

Rear camera

Type C Car Charger

User Manual

Warranty Card

## Product specification

Wifi name – CruiseCam-BLTX3XXX

Video resolution- QHD 2k + FHD1080p

Wi-Fi- Supports 2.4G Wi-Fi

Loop recording

Video format- H.264 TS

Storage- SD card up to 128GB (C10 or above)


Power Input- Car Charger: input 12-24V,

Output 5V/2A

## Installation steps – Dashcam

1. Use a clean, soft cloth to clean the windshield to ensure that the support bracket can be firmly adhered.
2. Take out the recorder host, insert the formatted SD card, tear off the 3M glue on the bracket, and then paste the bracket to the appropriate position. It is recommended to paste it on the windshield behind the rearview mirror. Pay attention to pre-fixing it above the recorder. Leave some space for easy wiring.

- Put the car charger into the 12v power socket and connect it to the dashcam. It is recommended to route the cable in the direction shown in the figure:

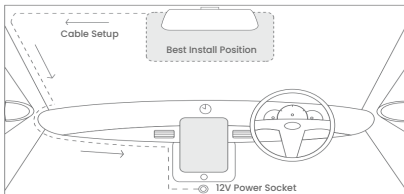


- After the recorder is installed and the car is started, the recorder automatically turns on and records video. The working indicator light flashes, indicating that it has entered normal working status.

**Note:** Please use a regular brand of SD card, with a reading and writing speed of at least CLASS 10 and above; before using the device, please format your SD in the device before operating; the video can be recorded in an infinite loop, but a prompt will appear when the locked video is saturated.

When the card is full, please selectively delete your locked videos or format the SD card. (To ensure normal SD recording, it is recommended to format the SD card every 2-3 months)

## Installation steps – Rear Camera

1. Use a clean, soft cloth to clean the rear windshield and place the electrostatic sticker. Ensure that no air bubble are trapped between the sticker and the glass.
2. Paste the rear camera onto the electrostatic sticker after peeling off the protective film from the adhesive sticker on the base of the mount.
3. Connect ports A and B together to connect the rear camera with the rear signal wire. Run the wire along the top of the rear windshield, C-pillar, top of the side windows to the main device as shown in the figure below. Plug the Mini USB 8PIN power port into the main device (the AV/IN port of the main device).

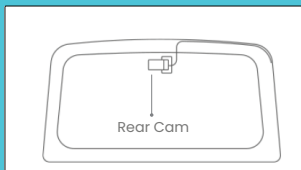

**Note:** The installation and wiring procedures may vary for different vehicles compared to those outlined in the user manual. Therefore, it is recommended that a professional installer handle the installation process.

## Wi-Fi Instructions

### Application Installation

For iOS devices: Please search the "Boult Cruise" from APP Store download for free.

For Android devices: Please search "Boult Cruise" from Google Play download for free.

Or scan the QR code below for quick download.



Turn on the Wi-Fi function on the mobile phone, search for the following Wi-Fi name, and enter the password

SSID: CruiseCam-BLTX3XXX

Password: 12345678

After the Wi-Fi connection is successful, enter "Boult Cruise" to operate the recorder on the APP.

## Button Functionality

**Power button:** Short press the button to start and stop the recording. While in playback, short press to start/pause the file. Long press the button to power the device on/off

**Mode Button:** Short press to navigate between modes.

**UP Button:** Press and hold to take a picture.

**DOWN Button:** Press and hold to preview the style.

**Reset hole:** Press the reset button to power off and restart the hardware.

## On screen indicator

The red light on the top left corner of the screen indicates that the recording is ongoing. If there is no red light flashing, then the recording has stopped.

## Precautions

- Before installation, please remove the protective film of the device lens, and keep the camera and the installation location clean.
- This device uses a special power cord, which is included in the package. Please do not use the power cord bought in the market casually to burn the machine or cause instability.
- When the product is installed in the car, it cannot be placed randomly without being fixed. Do not place it outside the driver's sight, do not fix it where the airbag is, and do not place it in the area behind the airbag swelling.

- Do not adjust the recorder or watch the video on the mobile phone while driving, pay attention to driving safety.
- Do not install the recorder in a position that may block the driving line of sight.
- The suitable working temperature of this recorder is -10 C ~55 C, please do not expose to overheating environment.