

Introducing Top Pro

Our classic, versatile water dispenser for business and healthcare.

- Versatile water dispenser to suit diverse requirements
- Choice of up to four water types: unchilled and chilled still, chilled semi-sparkling and sparkling
- Flexible capacity: two versions, both with BRITA filters
- Outstanding hygiene through BRITA HygienePlus option – trusted by the healthcare industry for 20+ years



Top Pro

Our classic, versatile water dispenser for business and healthcare.



ThermalGate™
powerful thermal-
disinfection feature



PureProtect
smart self-cleaning
feature



The optional **BRITA HygienePlus fourfold** safeguard is designed for environments with stringent hygiene requirements. This protects your dispenser from contamination and germs



Our water dispensers produce 86% less CO₂ emissions than pre-bottled water and 64% less than bottled water dispensers

[Watch our Video on Youtube](#) →

Contact us today and let's talk about your
BRITA water dispenser solution | www.brita.net



Intuitive display and choice of
**touch dispensing or mechanical
buttons**

Medium- or high-
capacity versions

High-quality materials
stainless steel


Focus on sustainability:
natural refrigerant and extremely low
power consumption. 100% of the plastic
housing is made of ABS recycilate.



The **Easy Access Panel** helps create
a barrier-free, inclusive working
environment. The optional control
unit can be positioned to provide
easy access for wheelchair users

Two installation
options:



- Floorstanding
- Countertop




Top Pro



Technical data



Model	Top Pro still + sparkling	Top Pro still	
Design / Type	countertop	countertop	base cabinet
Types of water	   	 	
Configuration options			
Hygiene feature	BRITA ThermalGate™ or BRITA HygienePlus	BRITA ThermalGate™ or BRITA HygienePlus	
Dispensing buttons	touch dispensing or mechanical buttons	touch dispensing	
For installation independent of existing counters			base cabinet
For installation in barrier-free environments	Easy Access Panel	Easy Access Panel	
For installation without waste water connection	waste water container	waste water container	
Specifications			
Cooling capacity	L cooler: 10-60 regular users XL cooler: 20-100 regular users	L cooler: 10-60 regular users XL cooler: 20-100 regular users	
Unit dimensions (W x H x D)	278 x 530 x 518 mm	278 x 530 x 518 mm	base cabinet: 278 x 910 x 518 mm base plate: 440 x 4 x 510 mm
Dispensing height	330 mm	330 mm	
Weight	Top with L cooler: 35 kg Top with XL cooler: 40 kg	Top with L cooler: 33 kg Top with XL cooler: 38 kg	base cabinet: 16 kg base plate: 6 kg
Max. power consumption	Top with L cooler: 440 W Top with XL cooler: 540 W	Top with L cooler: 440 W Top with XL cooler: 540 W	
Max flow rate, still water	2 l/min	2 l/min	
Max flow rate, sparkling water	1.6 l/min	-	

CLARITY Protect

Water filter: Reliably safe, excellent water for your dispenser.

Reduces:

- particles such as microplastics and sand
- per- and polyfluoroalkyl substances (PFAS)
- metals such as lead
- pharmaceuticals, pesticides and hormones
- chlorine taste and odour
- organic impurities
- asbestos fibres
- removes bacteria and microbial cysts




CLARITY Protect

Water filter: Reliably safe, excellent water for your dispenser.

Mains water is strictly controlled. But healthcare and similar environments where hygiene is of the utmost importance demand an extra level of safety. CLARITY Protect delivers this through multi-stage filtration, rather than a single activated carbon filter. CLARITY Protect sets the industry benchmark from the first stage of filtration to the moment your glass is filled with crystal-clear, refreshing water. We offer you over 50 years of filtration expertise in our “standard” filter.

CLARITY Protect reduces:

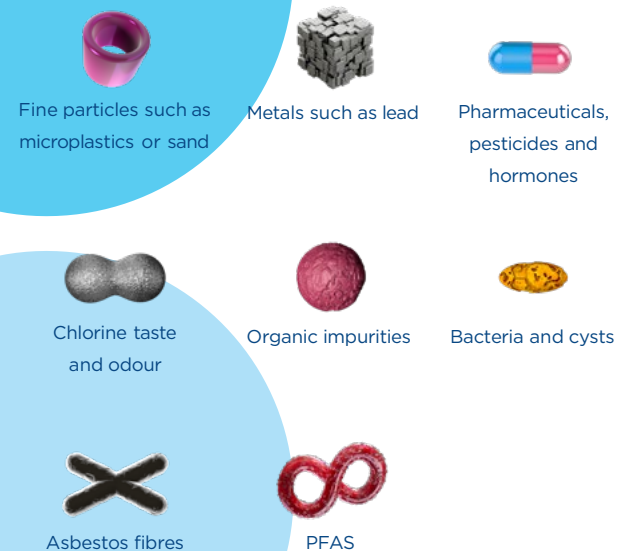

Contact us today and let's talk about your
BRITA water dispenser solution | www.brita.net



The right balance
Preserves minerals
in water

**Activated carbon
filtration**
Reduces substances
that impair taste and
odour

Pre-filter
Removes particles



Hollow fibre membrane
Nominal pore size of
0.15µm filters out
99.999% of bacteria
and 99.95% of cysts

Filter capacity:
Protect: 11,500 l

Exceptionally clean,
safe water

Protects equipment
lowering dispenser
maintenance costs



CLARITY Protect



Technical data



Model	BRITA CLARITY Protect 100
Technology	activated carbon and hollow fiber membrane filtration
Water intake temperature	4°C to 30°C
Ambient temperature for operation	4°C to 40°C
Ambient temperature for storage / transport	-20°C to 50°C
Water inlet and outlet connection	JG 8 mm
Operating pressure	2 bar to 8.6 bar
Flow rate at 1 bar pressure loss	180 l/h
Nominal filter capacity	11,500 l
Operating position	horizontal or vertical
Efficacy	
Reduction of particles such as micoplastics or sand	≥ 0.5 µm (NSF 42, Class I)
Reduction of asbestos fibres	> 99.9% (NSF 53 tested by independent laboratory)
Reduction of PFAS	> 99% (NSF 53 testet by independent laboratory)
Reduction of metals such as lead	> 90% (DIN EN 14898)
Reduction of chlorine	> 90% (DIN EN 14898, Class I) and > 50% (NSF 42)
Reduction of organic impurities such as benzene	> 90%
Reduction of pharmaceuticals, pesticides and hormones such as naproxen, lindane, estrone	> 90% up to at least 8,000
Reduction of bacteria	99.999% (ASTM F838-20)
Reduction of cysts	99.95% (NSF 53)
Dimensions (W x D x H)	
Filter system (filter head with filter cartridge)	68 x 68 x 338 mm
Filter cartridge	68 x 68 x 311 mm
Installed dimensions (vertical installation with wall mounting bracket)	68 x 74 x 371 mm