


Operation Instruction for Portable Power Source

Please read this operation instruction before using the product.

Product Ports

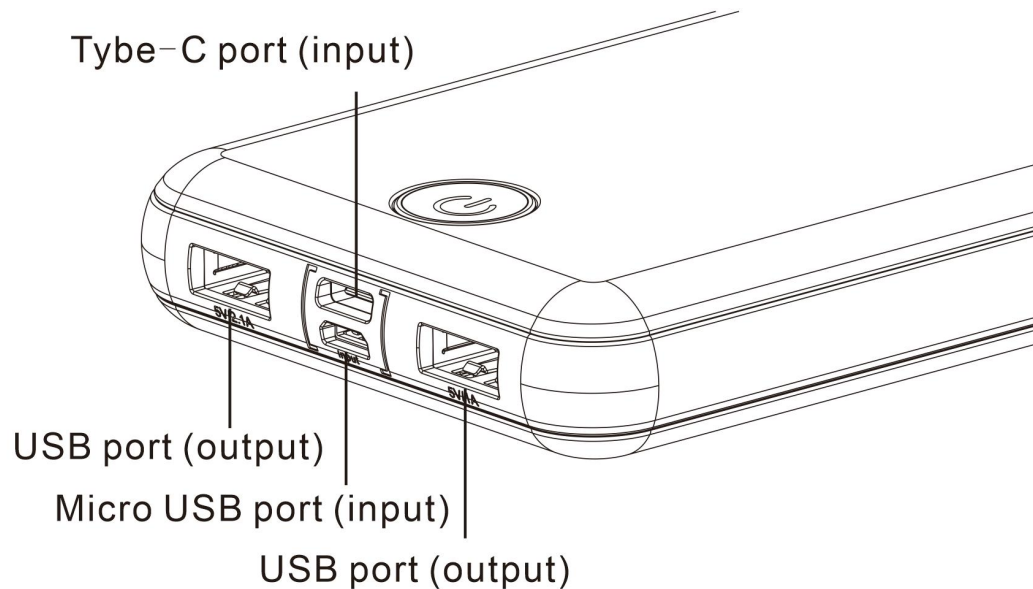

Product Features

Safety: With multiple protection designs, several abnormal conditions such as overcharge, overdischarge, high temperature and short circuit can be easily handled no matter in charging, discharging or standby state to provide reliable guarantee for your mobile phone and digital device.

Efficiency: With quick charging and discharging efficiency, supporting quick charging and discharging, 5V/2.1A, 5V/1A intelligent output.

Compatibility: embedded with intelligent USB charge controller, compatible with main stream mobile phone and digital device, supporting main stream quick charging and discharging device.

Quality: high-quality Li-polymer electric core is selected with customized charging and discharging electric chip.

Product Introduction

Thank you for your selection. This product is a type of high-capacity portable power source with high quality Li-polymer electric core and customized charging and discharging electric chip, which performs well in safety, efficiency and compatibility, etc.

Product model: HX160S3

Battery type: Li-polymer electric core

Input parameter: 5V/2.1A


Output parameter: 5V/2.1A,5V/1A

Dimension: ~18.5×76×153mm

Usage temperature: 0℃~45℃

Product Operation

Power indicator switch / LED indicator

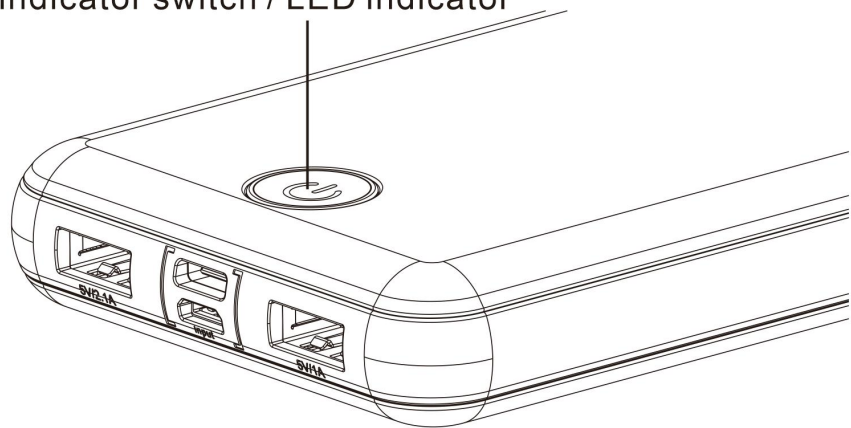

Power Indicator Switch

After the product stops working, the LED light will automatically turn off in about 30 seconds. To view the current remaining power of the product, you can tap the switch to re-light the LED light to view the current remaining power of the product (if there is no other operation, the LED light will go out again after about 5 seconds)

Charging

Charge the product with a brand power adapter connection. LED light shows current battery charge while charging

capacity				
	0~25%	25~50%	50~75%	75~100%
Indicator light				
red light	Flicker			
Green light		Flicker		
Blue light			Flicker	
White light				Flicker

finished charging				Long bright
-------------------	--	--	--	-------------

Discharging

This product uses a smart identification charging design. When the digital product is connected with a USB power cable, the digital product can be intelligently and automatically recognized, and the charging function can be activated. LED light shows current battery charge during charging

capacity Indicator light	0~10%	10~25%	25~50%	50~75%	75~100%
red light	Fast flashing	Flicker			
Green light			Flicker		
Blue light				Flicker	
White light					Flicker

Notice

- Please fully charge this product before first usage.
- During the usage of this product, please lighten the screen of digital product and confirm that the charging connection label is correctly displayed to ensure that the product is in normal working condition.
- During the charging for this product or charging for digital product with this product, please select adaptive connecting line by yourself.
- If the LED light of this product goes out during the charging process of the digital product, it means that the battery of the product is low, please charge it immediately.
- During the connection between the digital product and this product, the digital product has priority to use the electric quantity of this product.
- When the digital product is fully charged, please take out the connecting line in time to avoid loss.
- If the product enters into protection status due to output short circuit or other reasons (LED has no display after pressing buttons), it can be recovered by charging activation via external charger.

Warning

Since this product contains Li-ion electric core, it's forbidden to dismantle the product shell arbitrarily to avoid possible damage to electric core or other dangers.

It's forbidden to arbitrarily dismantle, squeeze, puncture this product or put it in short circuit, water, fire or exposed to an environment with a temperature higher than 60°C (140°F).