


TONE-SELECT™

# U1<sup>5</sup>/<sub>8</sub>" HYBRID

The LED T8 Hybrid tubes deliver outstanding lighting while cutting energy use and maintenance costs. Designed to work with or without a ballast, these versatile tubes are a top-tier replacement for standard fluorescent lamps, offering seamless compatibility and enhanced efficiency.

## PLUG & GO™ OR SINGLE/DOUBLE ENDED DIRECT WIRE

- Use with an instant start ballast for a direct replacement, or easily rewire for the lamp to operate directly off the main power supply.
- Exceptional efficacy
- 50,000-hour lifespan reduces replacements and labor costs.
- Tubes will work with shunted and non-shunted sockets  
(See *install instructions* for more details.)



Electrical	
Wattage	13W
Voltage	120-277V

Optical	
Efficiency (LPW)	Up to 123
CCT (Selectable)	3500K / 4000K / 5000K
Beam Angle	140°

Environment	
Operating Temperature	-4°F ~ 113°F
Suitable Location	Damp
IP Rating	IP20
Fixture Rating	Open or Enclosed
Emergency Lighting	No

Construction	
Housing	Glass / Plastic End Caps
Lens	Frosted
Base / Power Supply	Medium Bi Pin (G13)

Warranty (Complete terms can be found on our website.)	
Standard	5-year

Listings	
----------	--



TONE-SELECT™


# U1<sup>5</sup>/<sub>8</sub>" HYBRID

## PERFORMANCE DATA

LAMP WATTAGE	SYSTEM WATTAGE	LUMENS			LPW	CRI	CURRENT	POWER FACTOR	THD
		3500K	4000K	5000K					
13W	15.5W	1900	1975	1950	123	83	120mA	0.9	20

## DIMENSIONS

SIZE	
Length (L)	22.4"
Diameter (D)	1"

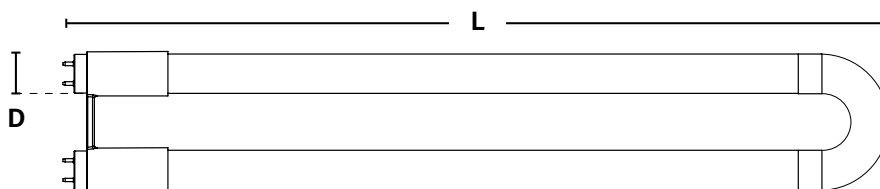

**Note:** In direct wire application; shunted sockets use double ended wiring only and non-shunted can use either single or double ended wiring. Please refer to install instructions for further details. • Visit [www.designlights.org/qpl](http://www.designlights.org/qpl) to confirm qualification. • DLC lists the wattage of the system power.