

TONE-SELECT™

U1⁵/₈" HYBRID

The LED T8 Hybrid tubes deliver outstanding lighting while cutting energy use and maintenance costs. Designed to work with or without a ballast, these versatile tubes are a top-tier replacement for standard fluorescent lamps, offering seamless compatibility and enhanced efficiency.

PLUG & GO™ OR SINGLE/DOUBLE ENDED DIRECT WIRE

- Use with an instant start ballast for a direct replacement, or easily rewire for the lamp to operate directly off the main power supply.
- Exceptional efficacy
- 50,000-hour lifespan reduces replacements and labor costs.
- Tubes will work with shunted and non-shunted sockets
(See *install instructions* for more details.)



Electrical	
Wattage	13W
Voltage	120-277V

Optical	
Efficiency (LPW)	Up to 123
CCT (Selectable)	3500K / 4000K / 5000K
Beam Angle	140°

Environment	
Operating Temperature	-4°F ~ 113°F
Suitable Location	Damp
IP Rating	IP20
Fixture Rating	Open or Enclosed
Emergency Lighting	No

Construction	
Housing	Glass / Plastic End Caps
Lens	Frosted
Base / Power Supply	Medium Bi Pin (G13)

Warranty (Complete terms can be found on our website.)	
Standard	5-year

Listings	
----------	--



TONE-SELECT™


U1⁵/₈" HYBRID

PERFORMANCE DATA

LAMP WATTAGE	SYSTEM WATTAGE	LUMENS			LPW	CRI	CURRENT	POWER FACTOR	THD
		3500K	4000K	5000K					
13W	15.5W	1900	1975	1950	123	83	120mA	0.9	20

DIMENSIONS

SIZE	
Length (L)	22.4"
Diameter (D)	1"

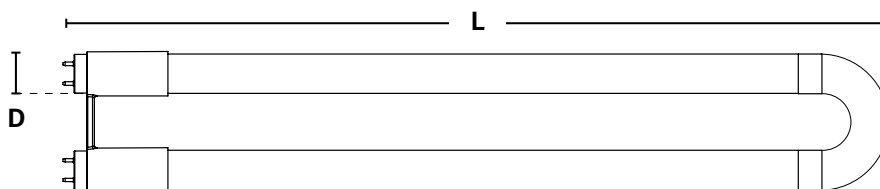

Note: In direct wire application; shunted sockets use double ended wiring only and non-shunted can use either single or double ended wiring. Please refer to install instructions for further details. • Visit www.designlights.org/qpl to confirm qualification. • DLC lists the wattage of the system power.