

"IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY"

- 1. Must use ground nails, ropes, and expansions screws for whichever ground you install on for stability to avoid devastating injuries for people inside or nearby and property damage caused by a collapsing gazebo.
- 2. Do not use this gazebo in high winds, heavy snow, or inclement weather. It is not designed to withstand strong gusts of wind, heavy snow accumulation, or other inclement weather. Must take precautions when the wind speed exceeds 25Mph, and clear snow when it accumulates more than 2 inches.
- 3. Before use, thoroughly inspect the gazebo to make sure all bolts, nuts, and buckles have been completely tightened and securely fastened.
- 4. Warranty does not cover damages, losses, or injuries resulting from improper installation, misuse, not using stability accessories mentioned above, non snow cleaning, failure to take precautionary measures, etc.

I TOOLS REQUIRED



Electric Screwdriver



Manual Screwdriver



Ladder



Gloves



Spanner

ATTENTION:

- 1. Please read this instruction carefully before installation and follow it strictly during installation.
- 2. Ensure that there are no problems later due to installation errors.
- 3. We have prepared extra screws for you to use in case of loss or damage.

Installation Notes

Please check the quantity of all parts before installation (Please refer to the Parts Lists) and the appearance of the products. Please make sure the product is correct before installation. If there is any problem, please contact us directly.

Make sure the colored panels are facing outwards and all the holes match. The panels are textured, please install the panels in the order specified in the instructions. All lines and holes must be accurately matched to make the storage shed more stable. Please ensure that all screws are tightened to prevent the product from falling apart.

There is a protective film on the surface to protect the product, please tear it off after installation to get the final presentation. If you do not damage the film during installation, it can also remain on the product to protect the product.

Please place the product on a flat ground to prevent leaning and collapse. If the ground is uneven, the door may can't be closed.



Safety Precautions


We recommend two adults to complete the installation. Two adults installed together will make the installation process easier and safer.


The gloves must be carried to prevent hand cuts during installation.


Take care when using power tools near water the use of a residual current device (RCD) is advised. Please use the electric driver carefully during screwing to prevent the screw from slipping and hurting your hand. (We recommend that beginners use a manual screwdriver for installation.) Be careful not to fall when installing the roof. Please steady the ladder and make sure the product placed on a flat ground.

PLEASE KEEP THIS INSTRUCTION FOR FUTURE REFERENCE.




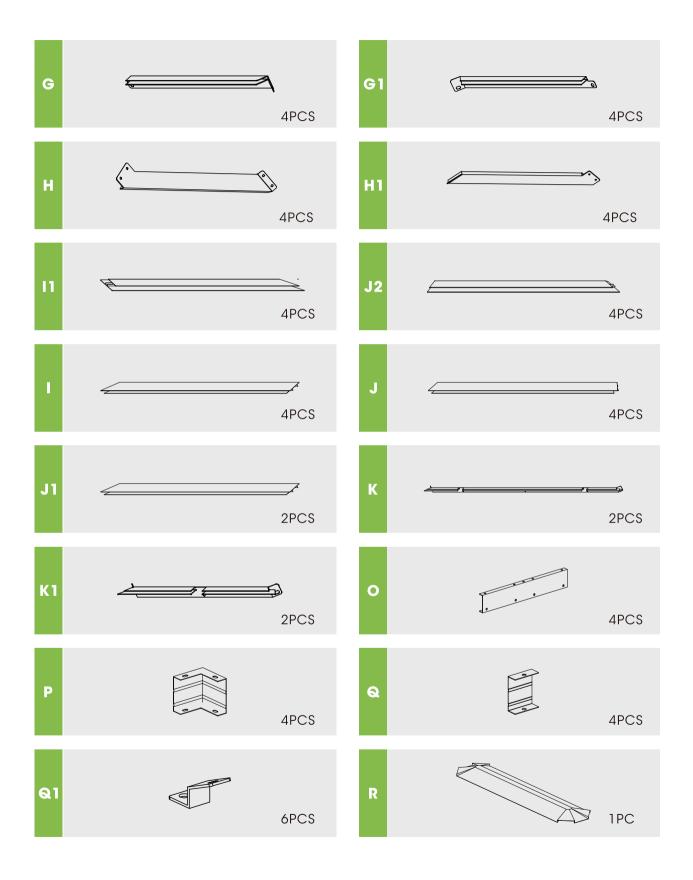

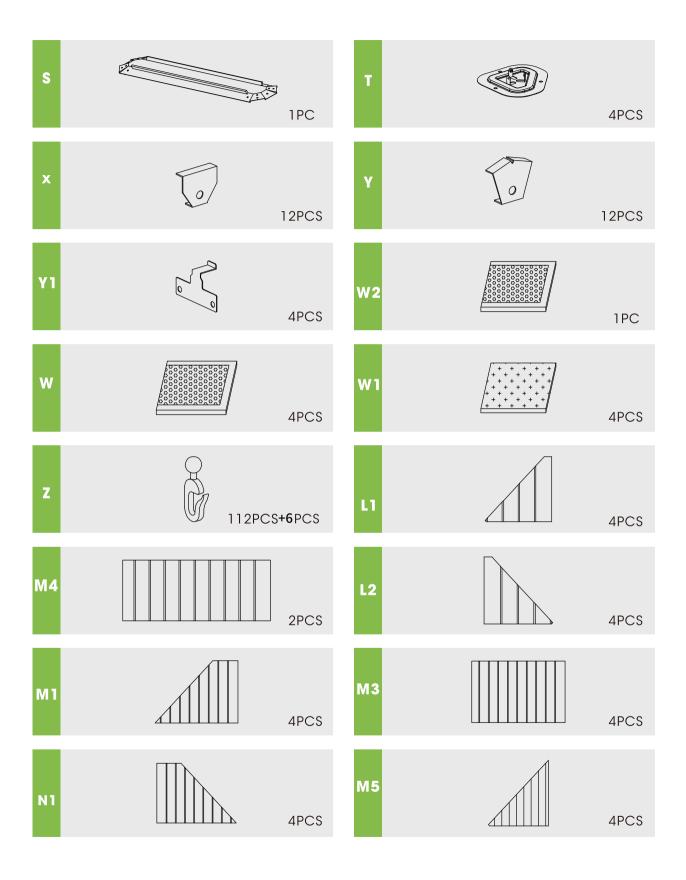


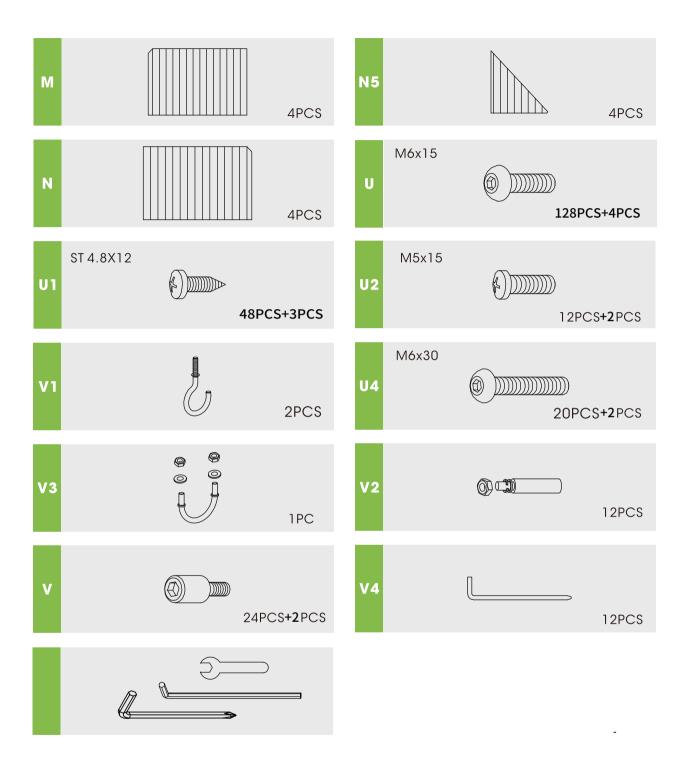


1 Attach the bottom of part "A" to part "T" and tighten with 3 screws "U".

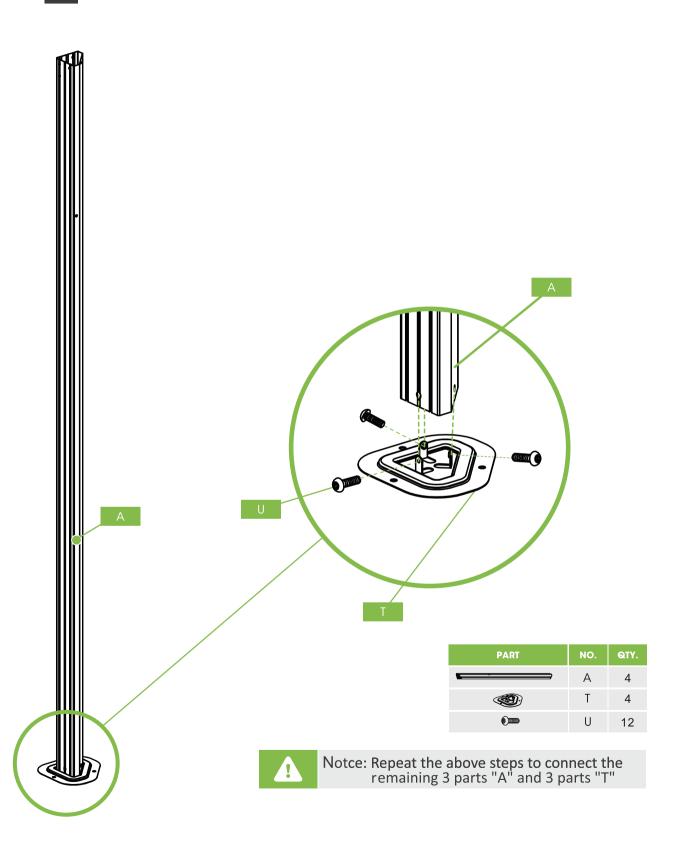

Place the connecting part "O" in the right frame of part "B1" and in the left frame of part "B".

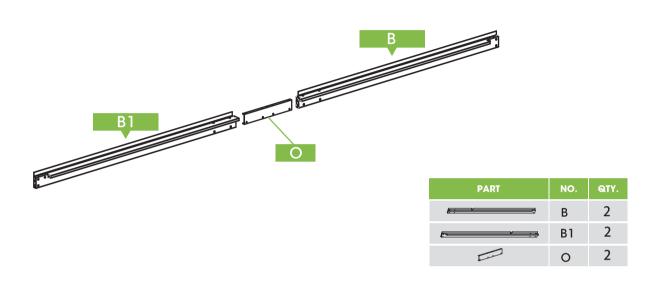


3 Connecting part "B" and part "B1" with 12 screws "U"

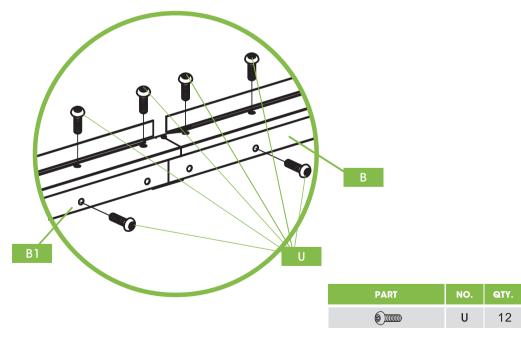


Notice: Before fixing, please make sure all the screw holes are aligned


A part "Q" and a part "Q1" are connected with a screw "U2" on the outside of the connection.

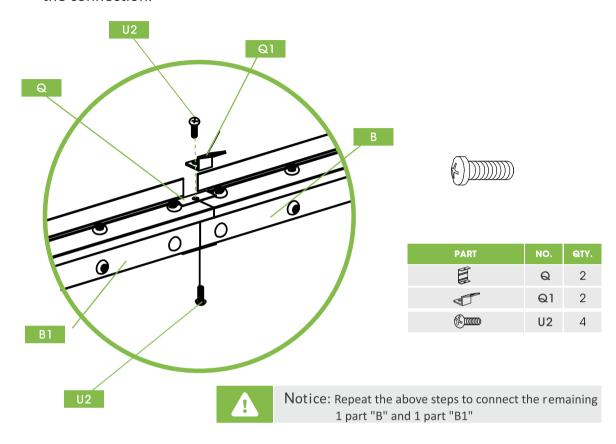


Place the connecting part "O" in the right frame of part "C1" and in the left frame of part "C".

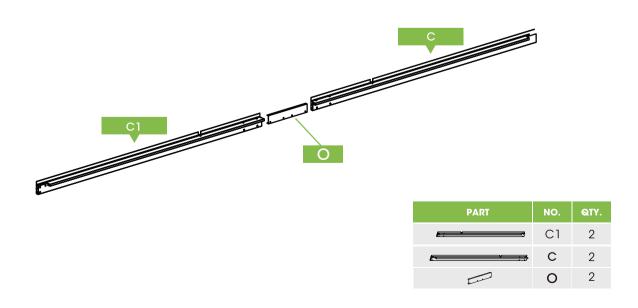

Connecting part "C" and part "C1" with 12 scews "U", fixed with 4 screws "U2".

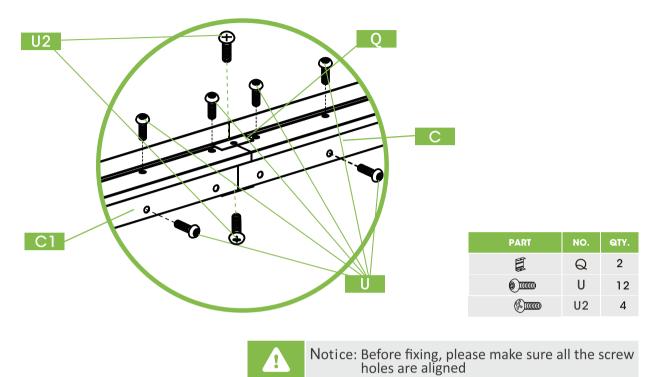


7 Four part "Q1" is fixed at the top with Four screw "U2".

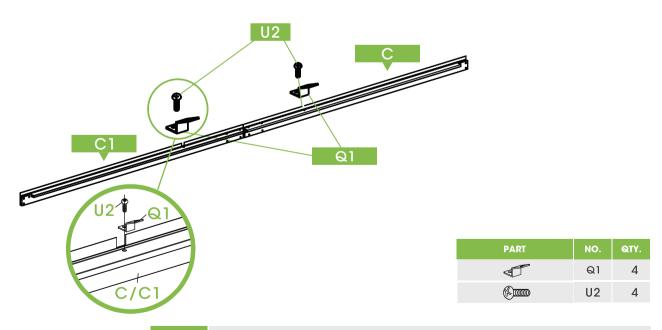


Notice: 1.Before fixing, please make sure all the screw holes are aligned 2. Repeat the above steps to finish conneccng the other part "C" and part "C1".

Attach the ends of part "C" and part "C1" to the top of part "A", using six screws "V" to connect the two sides.

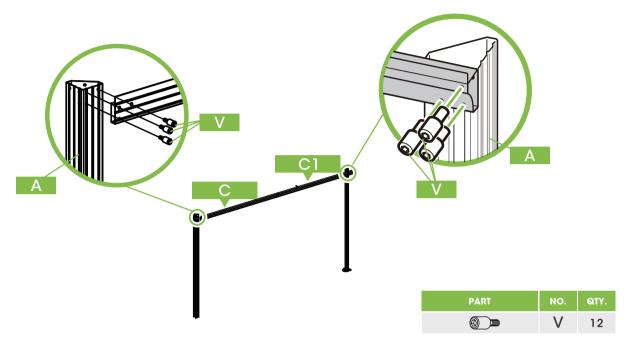


Attach the ends of part "B" and part "B1" to the top of part "A", using six screws "V" to connect the two sides.

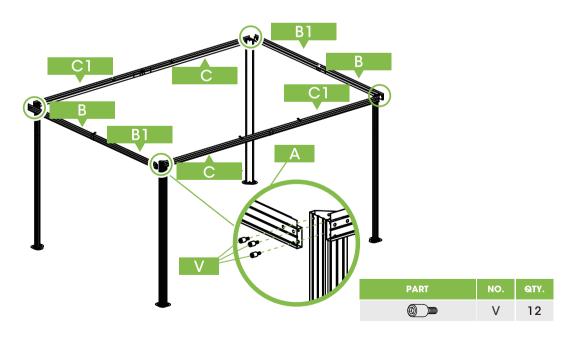


A


Notice: Repeat the above steps to atach the remaining part "B" and part "B1" to the top of part "A".

Connect the four parts "P" to the four corners and fix them with 16 screws "U1".

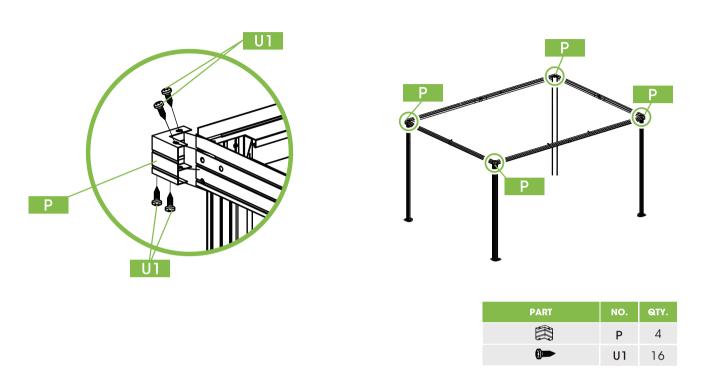


In the interior view of the gazebæight parts "H" and "H1" are attached to the sides of the columns using 16 screws "U"

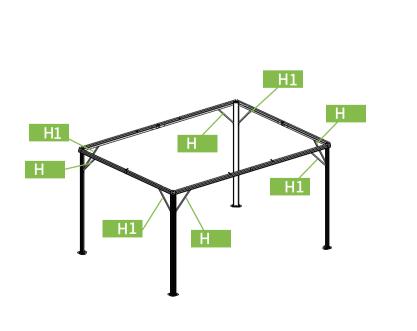




PART	NO.	QTY.
	Н	4
	Н1	4
	U1	32


- 1.Connect the part"D2"and part"D"with 2screws"U4" 2.Connect the part"D1"and part"D2"with 2screws"U"

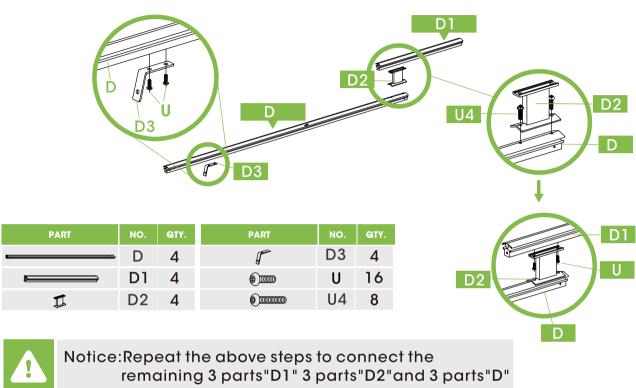


Connect 4 parts "D1" to part "S" and fix them with 8 screws "U". Fix part "V3" through part "S".

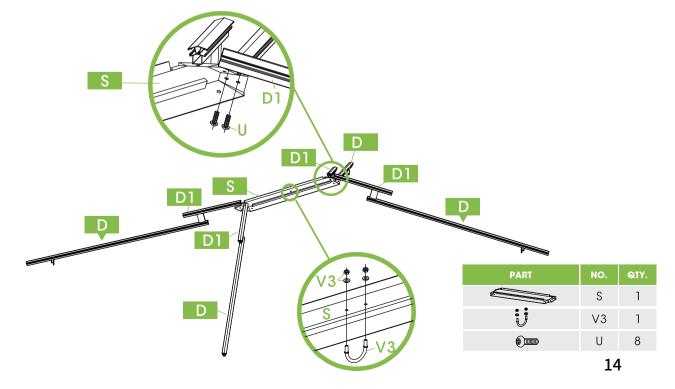

Move the whole roof to the shelf and fix the part "D" with four screws "U".

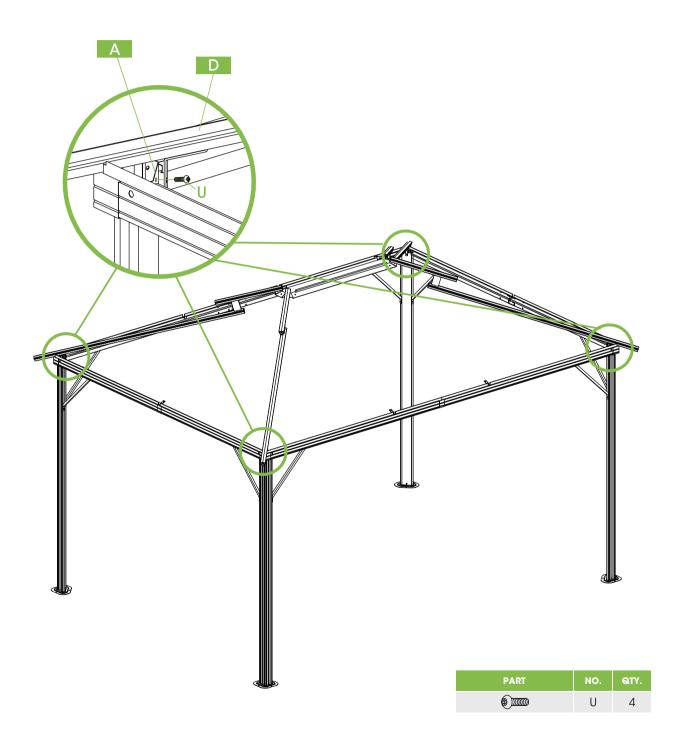

- 1.Connect the part"E3"and part"E2"with 2screws"U"
- 1.Connect the part"E3" and part "E/E1" with 2screws" U4"

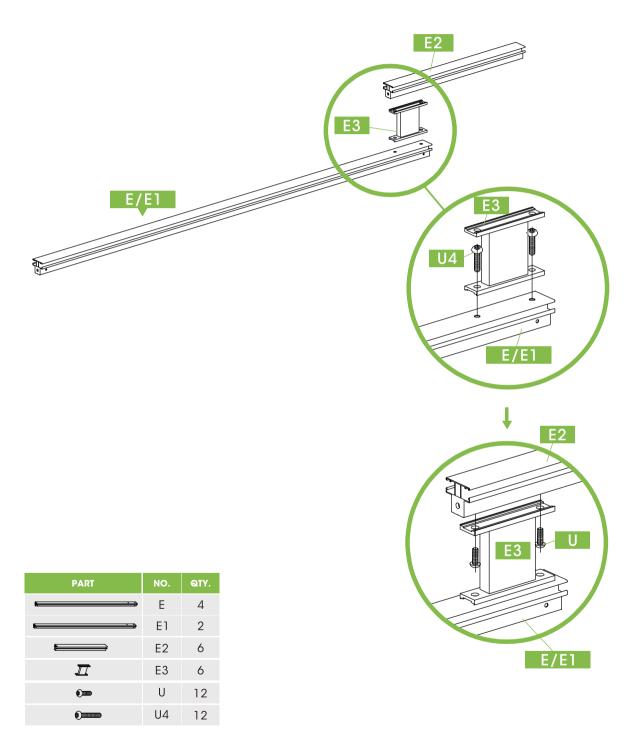





Notice:Repeat the preceding steps to install the remaining components

16

The correct position of part"E1" and part"E" is shown in the figure below. Place part "E1" on both sides and part"E" in the rest of the positions

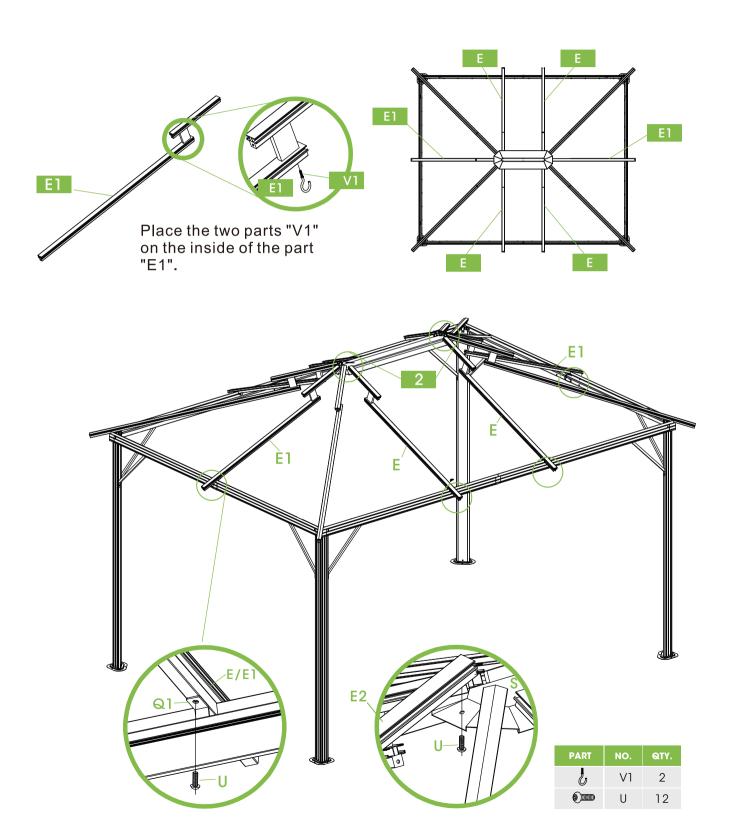


Use 4 parts "Y" and 10 screws "U" to fix part "K1" and part "K".

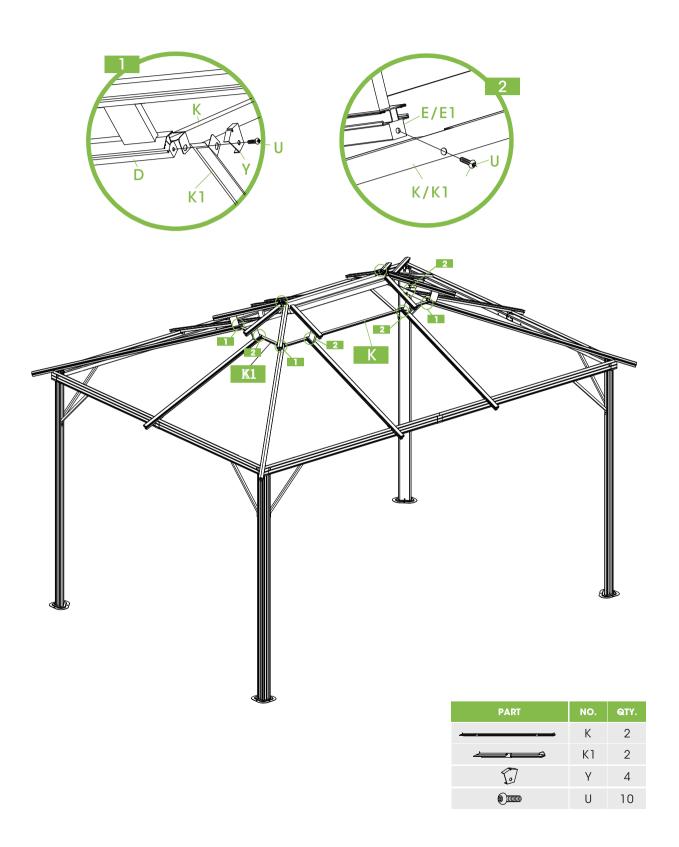


18

Place part "R" on the top of part "S" and secure it with two screws "U".

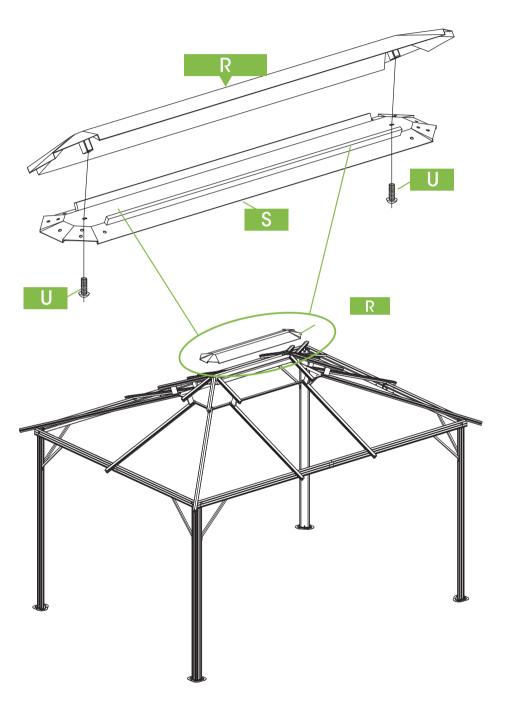

PART	NO.	QTY.
	R	1
	U	2

First, place part "L1", part "L2" and part "M4" on the open spadehe order of installation, so that they can be installed in order during fallation.

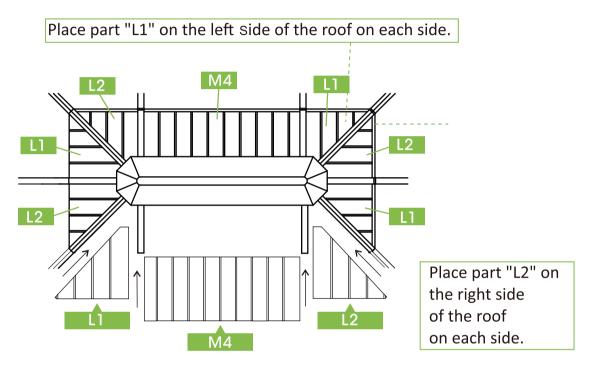


Place two parts "M4" in the middle of part "L1" and part "L2".


PART	NO.	QTY.
	L1	4
	M4	2
	L2	4


20


Use 4 screws "U" to fix the part "Y" in the four corners Fix the part "X"with 6 screws "U".

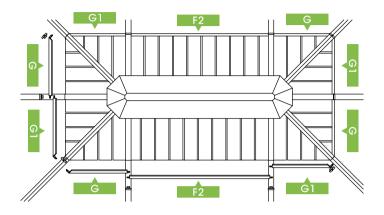


PART	NO.	QTY.
	F2	2
	G	4
	G1	4
O	Χ	6
O	Υ	4
	U	10

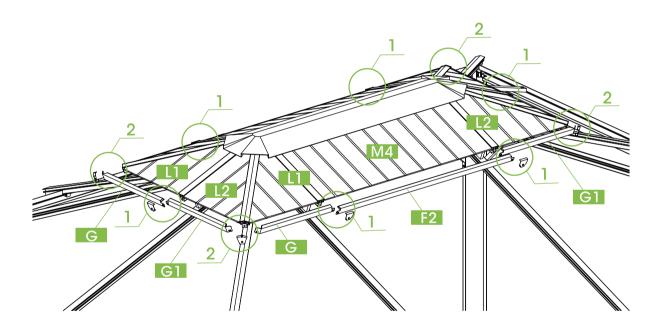









The correct part location is shown in the figure below.

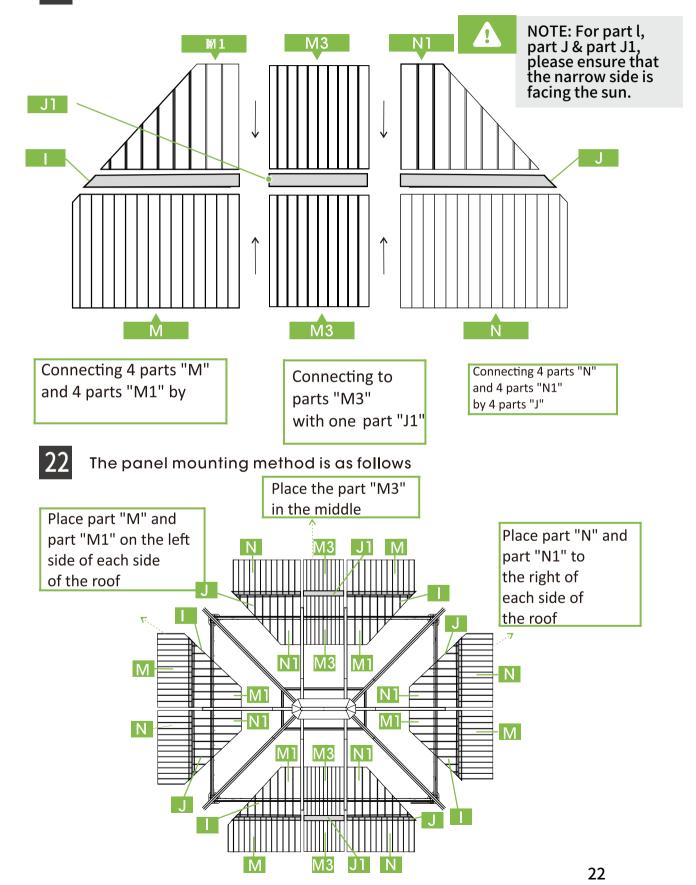


The panel mounting method is as follows

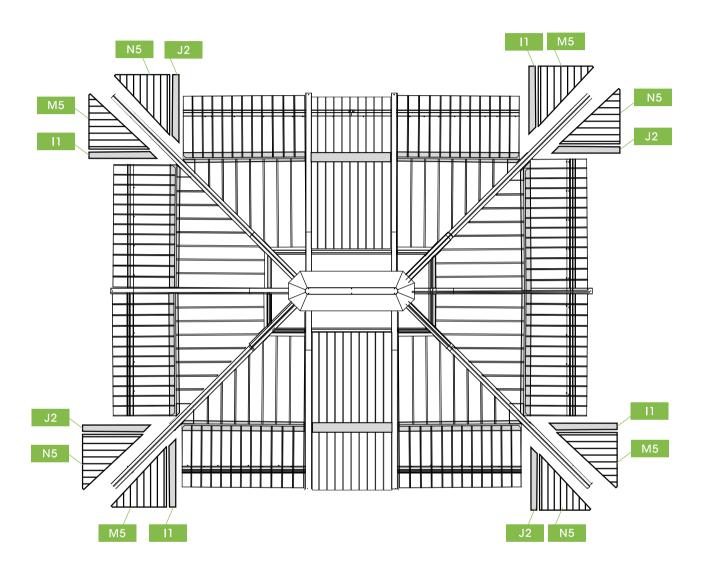



PART	NO.	QTY.
	M5	4
	N5	4
	- 11	4
	J2	4

The positions of parts "F", "F1" and "F2" are as follows.

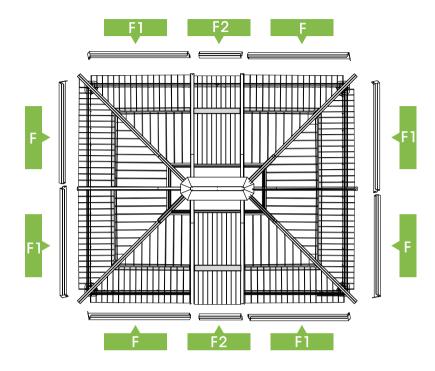

Use 6 parts "X" and 6 screws "U" to fix parts "F" and "F2". Use 4 parts "Y" and 4 screws "U" to fix parts "F" and "F1".

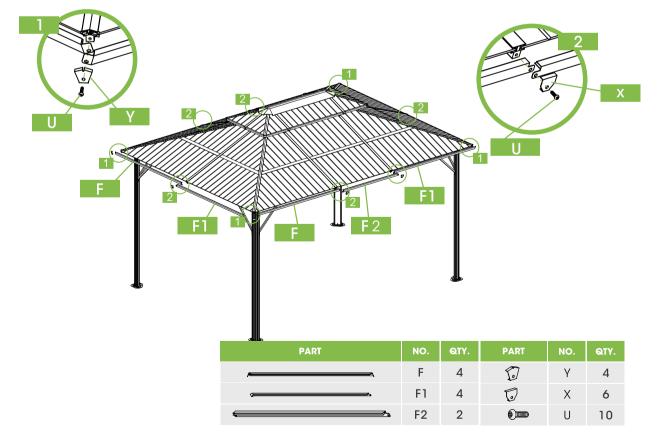


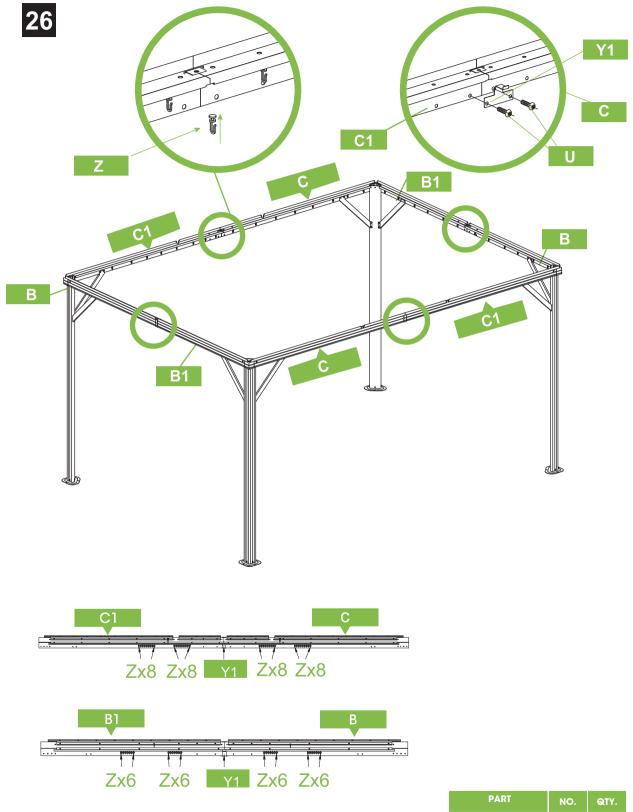


PART	NO.	QTY.
	Y1	4
	U	8
	Z	112

27

Hang part "W" and part "W1" on part "Z", with 8 holes on the long side and 6 holes on the short side.

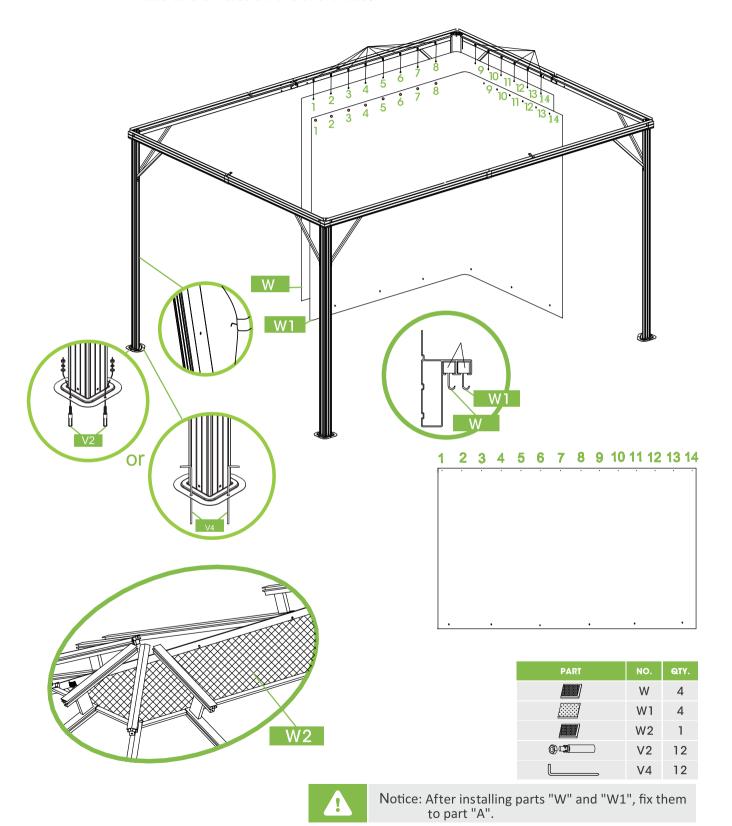

ENJOY YOUR PRODUCT!

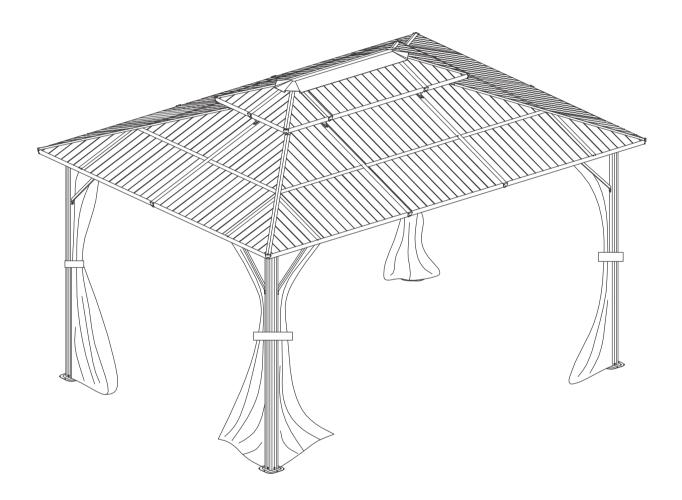

WARNING

Manufacturer and seller expressly disclaim any and all liability for personal injury, property damage or loss, whether direct, indirect, or incidental, resulting from the incorrect attachment, improper use, inadequatemaintenancepr neglectof this product.