

# FIXED FRAME SCREEN INSTRUCTION MANUAL

## CONTENTS

KNOWING YOUR SCREEN	01
ASSEMBLING YOUR SCREEN	05


Thank you for choosing to use our product! For your better use of the product, please read and keep this manual carefully before installation and use. Due to the improvement of the product, the product you purchased may not be the same as the description in the manual. We apologize for that!




# KNOWING YOUR SCREEN

1

## 1.1 Exploded Overview

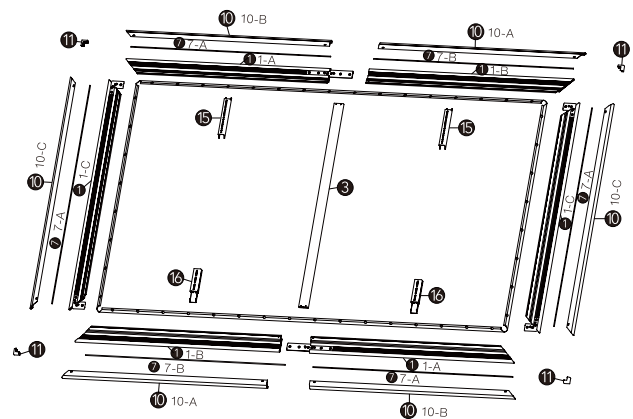


## 1.2 Package Contents



① Inner Frames \*4

① Inner Frames \*2




2 Cross \*2  
Screwdriver

③ Support Rod \*1

4 M4\*8  
Screws \*16

5 Gloves  
\*2 (pairs)




⑥ ALR Screen \*1

7 Fiberglass Strips \*6


8 Draw Springs <sup>\*N</sup>

⑨ Hooks \*2



10 Exterior Frames \*4

⑩ Exterior Frames \*2




11 Corner Protectors \*4

## 12 Wall Drilling<sup>\*1</sup> Templates

Wall Anchors  
with Screws \*8  
(sets)

14 Level Ruler \*1



15 Upper Wall Brackets \*2

16 Lower Wall Brackets \*2

⑰ User Manual \*1

18 Adhesive  
Tapes \*4




# ASSEMBLING YOUR SCREEN


# 2

## 2.1 Assemble the Inner Frames

1. Connect the horizontal frames and fasten the M5\*7 screws.
2. Insert the four corner connectors into the horizontal inner frames, and fix the corners with M5\*7 screws as shown below.

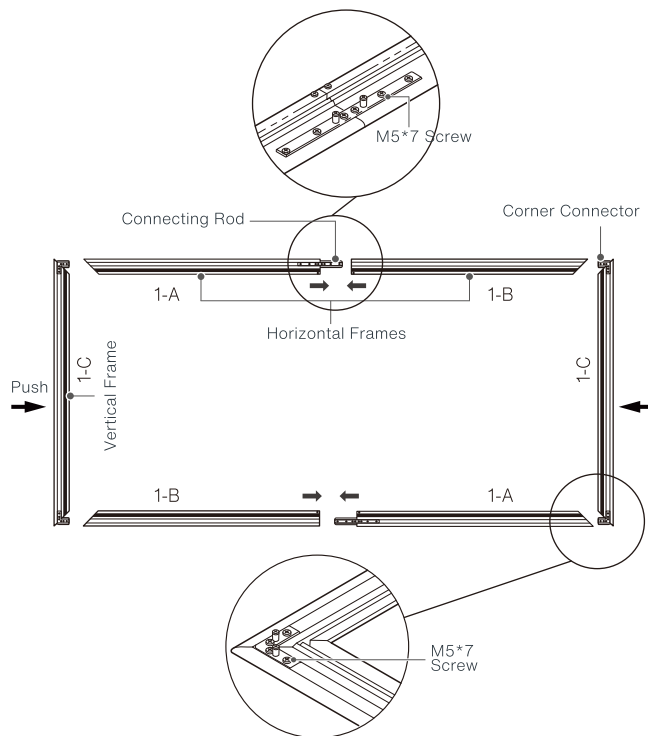

3. Install the support rod as shown below.

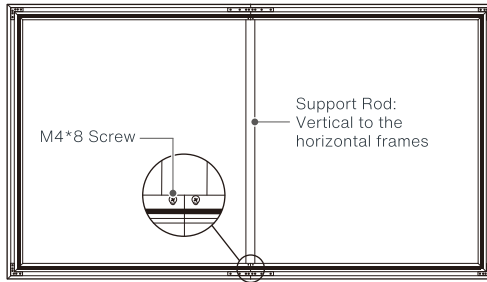



## 2.2 Assemble the Screen

1. Put on gloves and place a clean cloth (or use the packaging material for the screen) on a flat, clean and level surface.




2. Unroll the screen, place it face down on the cloth, then insert the fiberglass strips into the screen sides.

**Caution:** Handle with care. Avoid any creases on the screen.

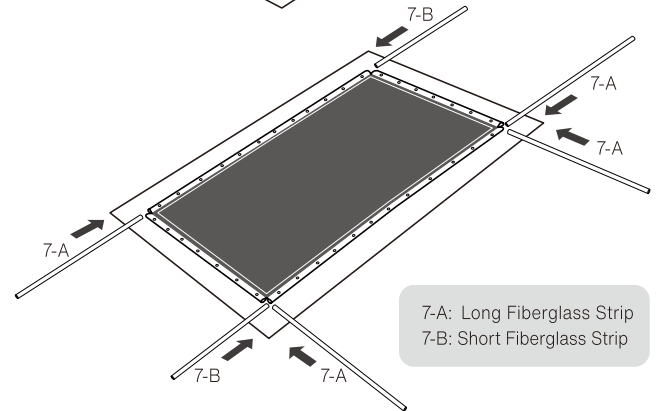
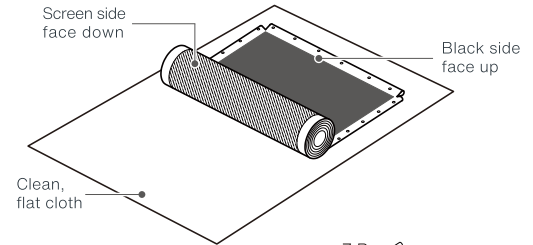


3. Put the assembled frames on the back side of the screen.

**Note:** short-focus anti-light screen is directional and needs to be well matched with the frames.

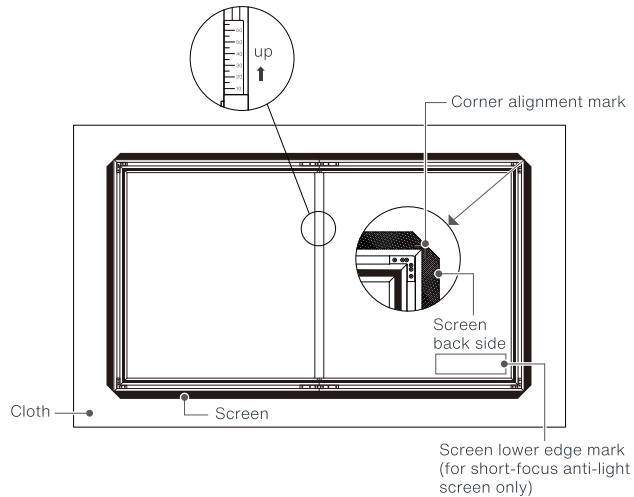


4. Fix the screen onto the frame with all the springs in order as indicated below (corners, short sides, then long sides).

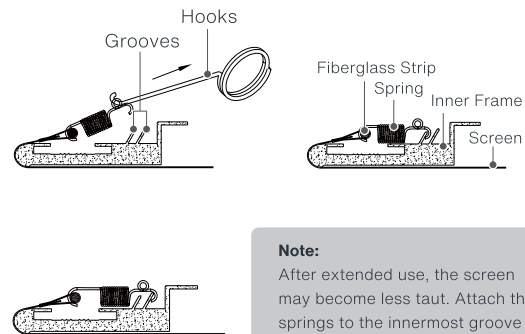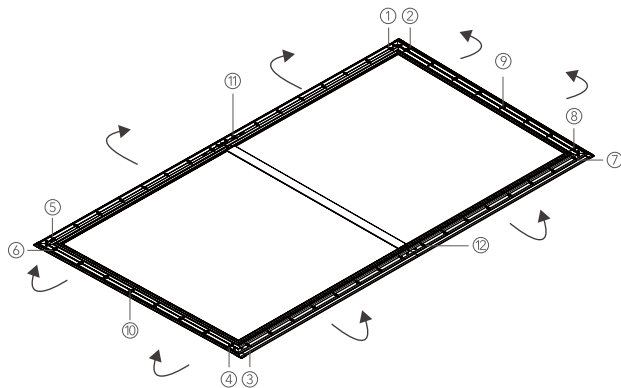

5. Hold the screen upright and ensure that it is taut and flat. Adjust the springs until no creases observed.


## 2.3 Assemble the Outer Frames

1. Place the outer frames against the inner frames, align the four corners and fix with the included M4\*8 screws.
2. Fix the plastic corner protectors onto the four corners.

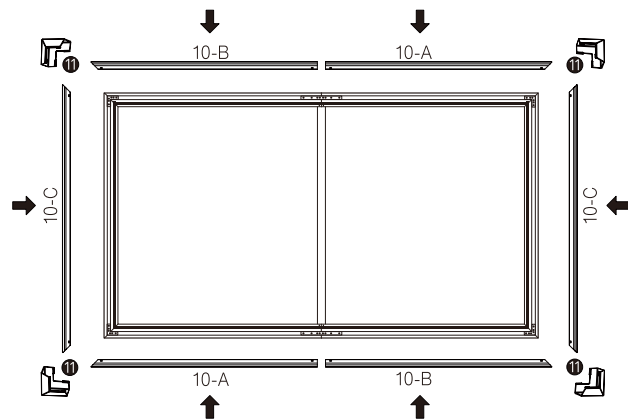

10-A/10-B: Horizontal Outer Frame      10-C: Vertical Outer Frame


10 : Corner Protector

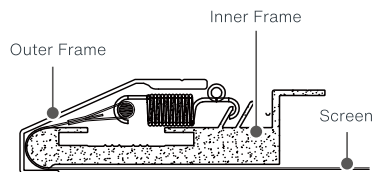


## 2.4 Mount on the Wall

1. Estimate the wall mount area for the screen. The lower edge of the screen should be 60-80cm / 23.6-31.5 in above the ground (as shown below).
2. Measure the distance between the spots where the wall brackets will be mounted with the included level ruler.

### Recommended Distance

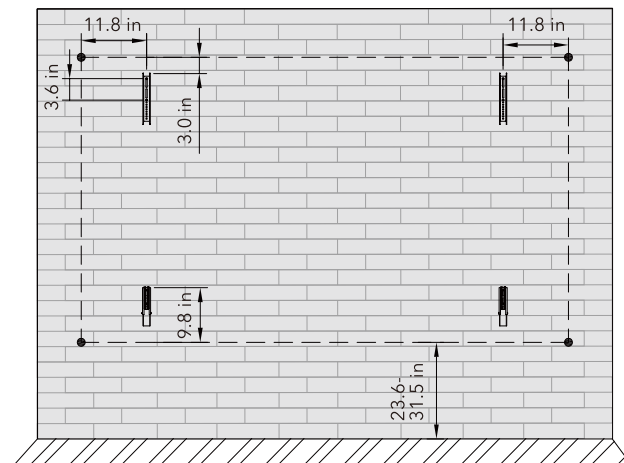


3. Make sure the screen is correctly assembled, then wrap the screen front with the cloth to prevent it from being damaged or scratched.

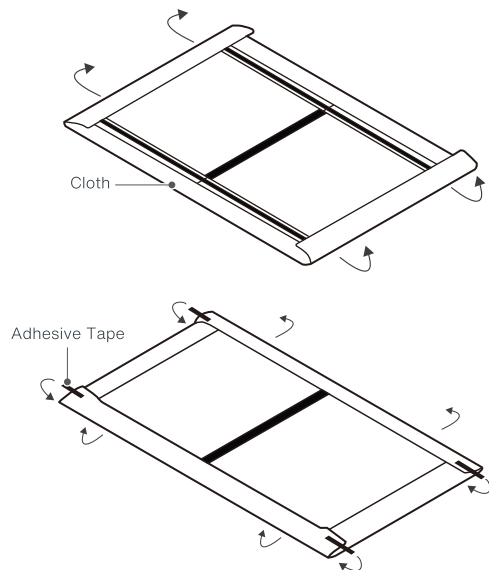

4. Drill holes respectively and install the four wall brackets using the wall anchors with screws.


**Note:** Make sure the brackets are level with the level ruler.

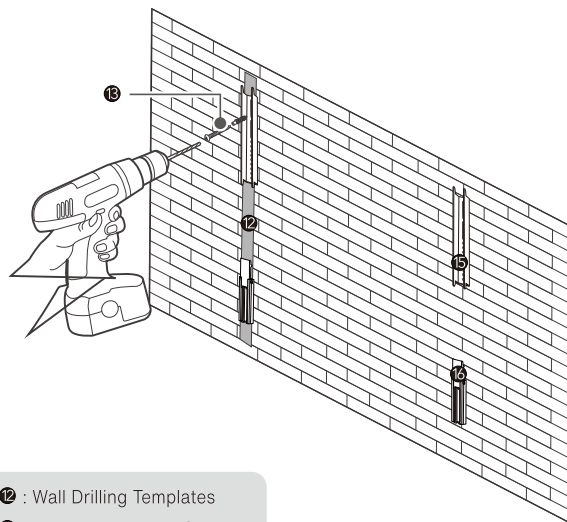

- 12 : Wall Drilling Templates
- 13 : Wall Anchors with Screws
- 15 : Upper Wall Brackets
- 16 : Lower Wall Brackets

5. Mount the screen onto the wall as shown below.

- 1) Insert the lower side of the screen into the lower wall bracket, then push upwards to compress the spring.
- 2) Insert the upper side of the screen into the upper wall bracket, then release.

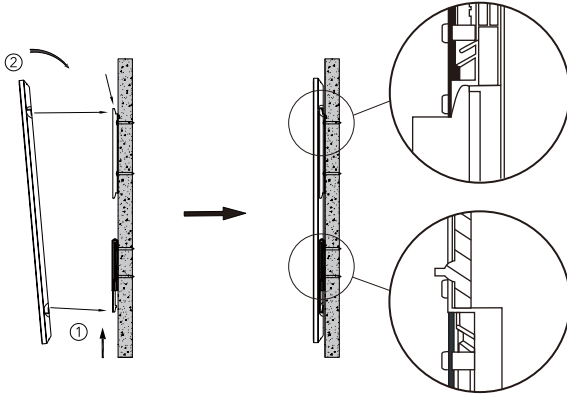

## 2.5 Screen Height Adjustment

Adjust the upper wall bracket by adjusting the screws in the lower holes, so that the screen height can be adjusted (adjustable range: 0 - 50mm).

