



HEAT SHIELD SIDE F 620


1

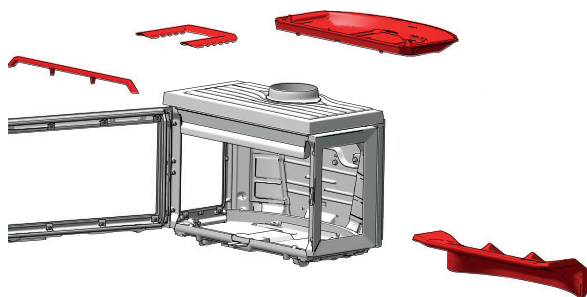


2

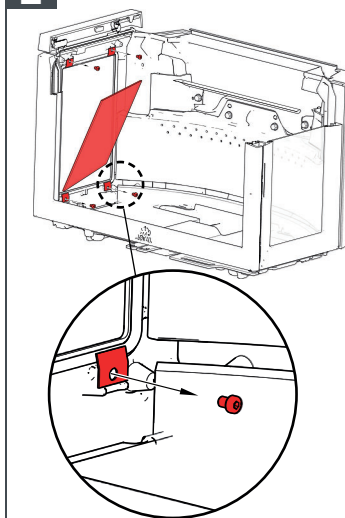


3

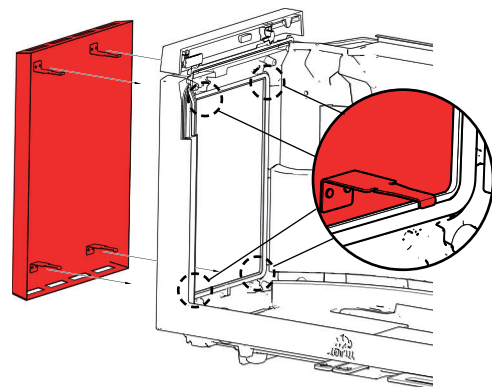


4

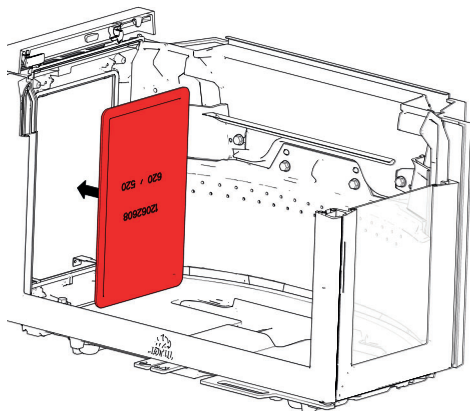


5

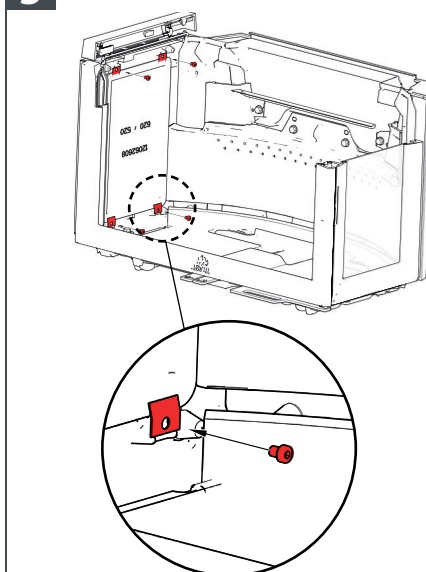


6

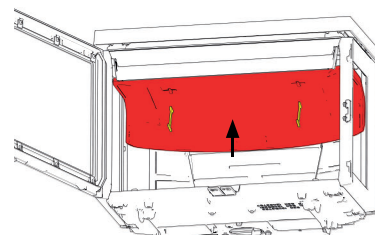


7

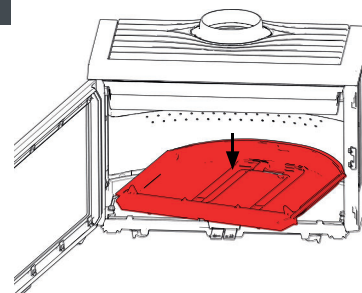


8

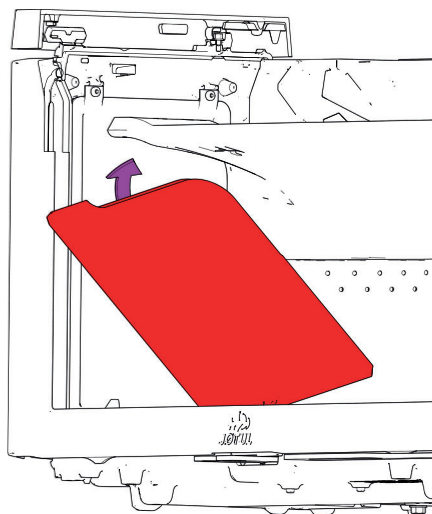


9

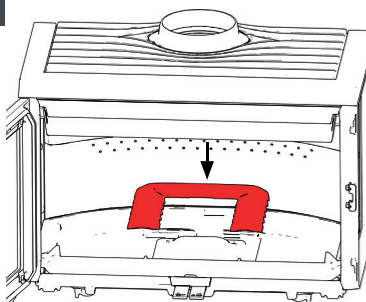

10

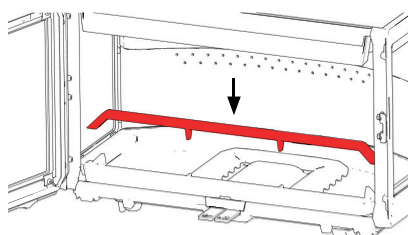

11

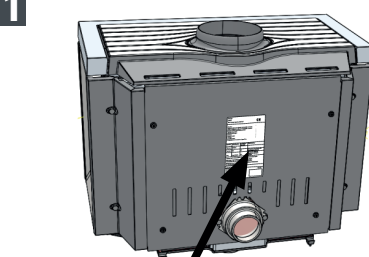

Product: Jøtul F 620 F, FR, FL, Heatshield back, Convection kit

Room heater fired by solid fuel

Standard: EN 13240:2001AC:20042:2004

Minimum distance to combustible materials REAR: 300 mm

Minimum distance to combustible materials SIDE WITH GLASS: 500 mm

Minimum distance to combustible materials SIDE WITH CAST IRON: 400 mm

Minimum distance to combustible materials SIDE WITH CAST IRON + HEATSHIELD: 300 mm

Emission of CO in combustion products (12% O₂): 0.07%

Flue gas temperature: 272°C

Rated heat output: 9.5 kW

Efficiency: 77%

Fuel type: Wood

Combustion type: Intermittent

Electrical safety: The appliance can be used in a shared room.

Country	Classification	Standard	Approved by
EUR	Intermittent	EN 13240	Danish Technological Institute

Follow user's instructions. Use only recommended fuels.
Montage- und Bedienungsanleitung beachten.
Verwenden Sie nur empfohlenen Brennstoffe.
Respectez les consignes d'utilisation. Utilisez uniquement les combustibles recommandés.

Cut off this part and replace the label already attached to the product with this one

