

# POWER ACOUSTIK®

POWERACOUSTIK.COM

## 2017



SUBWOOFERS | AMPLIFIERS | SPEAKERS | SOURCE UNITS | ACCESSORIES




# INCITE SOURCE UNITS



hands-free calling, Adaptive Fast Charging of enabled mobile devices, and more. Select Incite units add multi-color illumination or an advanced audio staging equalizer. Available models include 2-DIN with 6.2" LCD touchscreen, 1-DIN with 7" LCD touchscreen, 1-DIN with 3.4" LCD, and even a 2-DIN with 10.3" LCD touchscreen!



Premium Incite Source Units feature GPS turn-by-turn navigation for all 50 United States, powered by iGo Primo. Set your destination to one of nearly 17 million available points of interest, or your own unique location. Follow the on-screen directions or audible text-to-speech commands, including lane departure guidance. Additional features include favorites list, programmable home destination, destination fuel estimates, multi-lingual, multi-gender voices, speed limit warnings, and more! Map updates available from Naviextras.com.

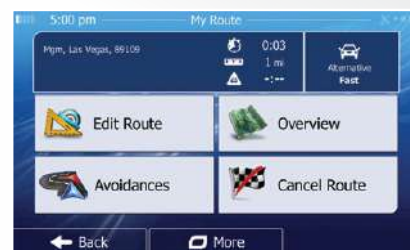

GPS Navigation models include Android PhoneLink mobile device integration, enabling complete control of your Android smartphones and tablets. Conveniently launch any application, post social media updates, or play your own videos and all other content on your mobile device. Your smart device display is mirrored to the head units larger LCD screen via USB, and all commands are sent via Bluetooth 3.0 connection. Android PhoneLink ensures safe, hands-free operation of your smart device without the distractions of locating & handling a device.



## Everything, Everywhere


In addition to Aptix's great features, select models include interface for SiriusXM's satellite radio tuner SXV300 (sold separately). Welcome to commercial-free music from every genre, live play-by-play sports, the biggest news and talk, and the hottest entertainment at your fingertips, 24/7.

Enjoy over 140 channels, including commercial-free music plus the best sports, news, talk, comedy and entertainment. SiriusXM signal coverage spans over 3.7 million square miles, coast to coast. No longer will you worry about losing radio reception...



## Bluetooth V3.0 Hands-Free Calling

Bluetooth V3.0 with Enhanced Data Rate increases traditional data transfer rates to 2.1 Mbit/s. This lightning quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback. Most Bluetooth enabled Smartphones will transfer phone book contacts, view recent call logs, and stream MP3 audio tracks.



## Adaptive Fast Charging

We demand top performance of our mobile devices to meet our social media and content streaming needs. To keep up with rapidly changing design trends, our mobile devices tend to rely on limited energy capacity, utilizing every efficiency to prolong the charge of the battery. AptiX source units feature USB Adaptive Fast Charge technology, reducing necessary down time to get you moving again. AFC has the potential to recharge enabled mobile device batteries from zero to up to 50% in about 30 minutes. (USB cable not included)

NEW FOR  
**2017**

# INCITE SOURCE UNITS

## PD-1032B

ISO 2-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth 4.0 Connectivity, & 10.3" Touchscreen LCD



**2-DIN with 10.3"  
Detachable LCD!**



**DVD**



**USB**



**AUX  
INPUT**



**Bluetooth®**



**TOUCH  
SCREEN**



**X300  
WATT  
4CH. AMPLIFIER**

## PD-1032B Standard Features:

ISO 2-DIN Chassis, Universal Mounting Sleeve Included  
10.3" 800\*480 16:9 Aspect Ratio Widescreen LCD  
Detachable Faceplate, Padded Carry Case Included  
SmartSense Glass Panel Touch Screen Technology  
Bluetooth V4.0 Hands-Free Calling from Enabled Phone  
A2DP Wireless MP3 Audio Playback from Enabled Device  
Built-in Microphone & External Microphone Included  
Accepts OEM Steering Wheel Control Interfaces  
Playback from DVD & CD of MP3, MP4 & Other Video  
Playback from 64GB USB of MP3, MP4 & Other Video

2A 5V Adaptive Fast Charge of Mobile Devices  
ID3 MP3 Tag Reading for Track & Artist Information  
3.5mm AUX Audio Input for Personal Media Devices  
Rear Audio/Video Input for Personal Media Devices  
Front & Rear RCA Pre-Amp Audio Outputs  
Subwoofer RCA Pre-Amp Audio Output  
Video Output for Auxiliary Devices  
Rear View Camera Input w/ Trigger  
300w 4ch. MOSFET Speaker Outputs  
Multi-Region FM Frequency Stepping  
Remote Control Included




# INCITE SOURCE UNITS

**PDN-621HB** - iGo GPS Navigation + Android PhoneLink + Standards  
**PD-621XB** - SiriusXM Tuner Ready + Standards  
ISO 2-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth 4.0 Connectivity, & 6.2" Touchscreen LCD





**DVD**



**USB**



**AUX INPUT**



**TOUCH SCREEN**



**X300 WATT 4CH. AMPLIFIER**



Control Your SiriusXM Tuner From The Touch Screen Display! Enjoy Over 140 Channels, Including Commercial-Free Music Plus The Best Sports, News, Talk, Comedy And Entertainment

- 621Series Standard Features:**  
ISO 2-DIN Chassis, Universal Mounting Sleeve Included  
6.2" 800\*480 16:9 Aspect Ratio Widescreen LCD  
Bluetooth V4.0 Hands-Free Calling from Enabled Phone  
A2DP Wireless MP3 Audio Playback from Enabled Device  
Built-in Microphone & External Microphone Included  
Accepts OEM Steering Wheel Control Interfaces  
Playback from DVD & CD of MP3, MP4 & Other Video  
Playback from 64GB USB of MP3, MP4 & Other Video  
2A 5V Adaptive Fast Charge of Mobile Devices
- ID3 MP3 Tag Reading for Track & Artist Information  
3.5mm AUX Audio Input for Personal Media Devices  
Rear Audio/Video Input for Personal Media Devices  
Front & Rear RCA Pre-Amp Audio Outputs  
Subwoofer RCA Pre-Amp Audio Output  
Video Output for Auxiliary Devices  
Rear View Camera Input w/ Trigger  
300w 4ch. MOSFET Speaker Outputs  
Multi-Region FM Frequency Stepping  
Remote Control Included

# INCITE SOURCE UNITS

NEW FOR  
**2017**  
SiriusXM Tuner Ready + Standards - **PD-625XB**  
Standard Features - **PD-625B**  
ISO 2-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth 4.0 Connectivity, & 6.2" Touchscreen LCD



**SiriusXM**  
READY

Control Your SiriusXM Tuner From The Touch Screen Display! Enjoy Over 140 Channels, Including Commercial-Free Music Plus The Best Sports, News, Talk, Comedy And Entertainment

**DVD**

**Bluetooth**

**USB**

**TOUCH SCREEN**

**AUX INPUT**

**X300 WATT 4CH. AMPLIFIER**



2-DIN with 6.2" Detachable LCD!

- 625 Series Standard Features:**  
ISO 2-DIN Chassis, Universal Mounting Sleeve Included  
6.2" 800\*480 16:9 Aspect Ratio Widescreen LCD  
Detachable Faceplate, Padded Carry Case Included  
Bluetooth V4.0 Hands-Free Calling from Enabled Phone  
A2DP Wireless MP3 Audio Playback from Enabled Device  
Built-in Front Panel Bluetooth Microphone  
Accepts OEM Steering Wheel Control Interfaces  
Playback from DVD & CD of MP3, MP4 & Other Video  
Playback from 64GB USB of MP3, MP4 & Other Video  
2A 5V Adaptive Fast Charge of Mobile Devices
- ID3 MP3 Tag Reading for Track & Artist Information  
3.5mm AUX Audio Input for Personal Media Devices  
Rear Audio/Video Input for Personal Media Devices  
Front & Rear RCA Pre-Amp Audio Outputs  
Subwoofer RCA Pre-Amp Audio Output  
Video Output for Auxiliary Devices  
Rear View Camera Input w/ Trigger  
300w 4ch. MOSFET Speaker Outputs  
Multi-Region FM Frequency Stepping  
Remote Control Included



# INCITE SOURCE UNITS

**PDN-721HB** - iGo GPS Navigation + Android PhoneLink + Standards  
**PD-721XB** - SiriusXM Tuner Ready + Standards  
**PD-721B** - Standard Features  
ISO 1-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth 4.0 Connectivity, & 7" Touchscreen LCD



NEW FOR  
**2017**



**DVD**

**USB**

**AUX INPUT**

**TOUCH SCREEN**

**X300 WATT 4CH. AMPLIFIER**



Control Your SiriusXM Tuner From The Touch Screen Display! Enjoy Over 140 Channels, Including Commercial-Free Music Plus The Best Sports, News, Talk, Comedy And Entertainment

**721 Series Standard Features:**  
ISO 1-DIN Chassis, Universal Mounting Sleeve Included  
7" 800\*480 16:9 Aspect Ratio Widescreen LCD  
Detachable Front Panel, Padded Carry Case Included  
SmartSense Glass Panel Touch Screen Technology  
Bluetooth V4.0 Hands-Free Calling from Enabled Phone  
A2DP Wireless MP3 Audio Playback from Enabled Device  
Built-in Front Panel Bluetooth Microphone  
Accepts OEM Steering Wheel Control Interfaces  
Playback from DVD & CD of MP3, MP4 & Other Video  
Playback from 64GB USB of MP3, MP4 & Other Video

2A 5V Adaptive Fast Charge of Mobile Devices  
ID3 MP3 Tag Reading for Track & Artist Information  
3.5mm AUX Audio Input for Personal Media Devices  
Rear Audio/Video Input for Personal Media Devices  
Front & Rear RCA Pre-Amp Audio Outputs  
Subwoofer RCA Pre-Amp Audio Output  
Video Output for Auxiliary Devices  
Rear View Camera Input w/ Trigger  
300w 4ch. MOSFET Speaker Outputs  
Multi-Region FM Frequency Stepping  
Remote Control Included

# INCITE SOURCE UNITS

Standard Features - **PD-623B**  
ISO 2-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth 4.0 Connectivity, & 6.2" Touchscreen LCD



**DVD**

**AUX INPUT**




**TOUCH SCREEN**



NEW FOR  
**2017**

**PD-623B Standard Features:**  
ISO 2-DIN Chassis, Universal Mounting Sleeve Included  
6.2" 800\*480 16:9 Aspect Ratio Widescreen LCD  
Bluetooth V4.0 Hands-Free Calling from Enabled Phone  
A2DP Wireless MP3 Audio Playback from Enabled Device  
Built-in Front Panel Bluetooth Microphone  
Accepts OEM Steering Wheel Control Interfaces  
Playback from DVD & CD of MP3, MP4 & Other Video  
Playback from 64GB USB of MP3, MP4 & Other Video  
ID3 MP3 Tag Reading for Track & Artist Information

3.5mm AUX Audio Input for Personal Media Devices  
Rear Audio/Video Input for Personal Media Devices  
Front & Rear RCA Pre-Amp Audio Outputs  
Subwoofer RCA Pre-Amp Audio Output  
Video Output for Auxiliary Devices  
Rear View Camera Input w/ Trigger  
300w 4ch. MOSFET Speaker Outputs  
Multi-Region FM Frequency Stepping  
Remote Control Included



**DVD**

**AUX INPUT**

**TOUCH SCREEN**



Standard Features - **PD-348B**  
1-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth Connectivity, & Detachable 3.4" LCD

**PD-348B Standard Features:**  
ISO 1-DIN Chassis, Universal Mounting Sleeve Included  
3.2" 720\*420 16:9 Aspect Ratio Widescreen LCD  
Bluetooth V4.0 Hands-Free Calling from Enabled Phone  
A2DP Wireless MP3 Audio Playback from Enabled Device  
Built-in Front Panel Bluetooth Microphone  
Accepts OEM Steering Wheel Control Interfaces  
Playback from DVD & CD of MP3, MP4 & Other Video  
Playback from 64GB USB of MP3, MP4 & Other Video  
ID3 MP3 Tag Reading for Track & Artist Information

3.5mm AUX Audio Input for Personal Media Devices  
Rear Audio/Video Input for Personal Media Devices  
Front & Rear RCA Pre-Amp Audio Outputs  
Subwoofer RCA Pre-Amp Audio Output  
Video Output for Auxiliary Devices  
Rear View Camera Input w/ Trigger  
300w 4ch. MOSFET Speaker Outputs  
Multi-Region FM Frequency Stepping  
Remote Control Included



# MobileLink X2 AVN SOURCE UNITS

MobileLink X2 Source Units feature GPS turn-by-turn navigation for all 50 United States, powered by iGo Primo. Set your destination to one of nearly 17 million available points of interest, or your own unique location. Follow the on-screen directions or audible text-to-speech commands, including lane departure guidance. Additional features include favorites list, programmable home destination, destination fuel estimates, multi-lingual, multi-gender voices, speed limit warnings, and more! Map updates available from Naviextras.com.



**MAPS**  
Enjoy the drive



## MHL 2-Way

Mobile High-Definition Link

PDN-626HB & PDN-726HB also include MHL MobileLink X2 mobile device integration, enabling complete control of your smartphones and tablets. Conveniently launch any application, post social media updates, or play your own videos and all other content on your mobile device. Your smart device display is mirrored to the head units larger LCD screen via USB, and all commands are sent via Bluetooth 3.0 connection. MHL MobileLink X2 ensures safe, hands-free operation of your smart device without the distractions of locating & handling a device.



Bluetooth V3.0 with Enhanced Data Rate increases traditional data transfer rates to 2.1 Mbit/s. This lightning quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback.

Digital Signal Processing features include a digital 10-band equalizer with 14dB boost or cut, custom presets, & factory presets. Additional DSP functions include variable subwoofer level control, reverb optimization, loudness adjustment, & sound staging controls.



### SERIES STANDARD FEATURES:

Turn-by-Turn GPS Navigation of USA, Canada, & Mexico  
12 Million Points of Interest Database Included  
Complete Integration of Select Android Enabled Devices  
Bluetooth V3.0 Hands-Free Calling from Enabled Phone  
A2DP Wireless MP3 Audio Playback from Enabled Device  
Built-in Microphone & External Microphone Included  
Accepts OEM Steering Wheel Control Interfaces

Advanced FM/AM Tuner with RDS  
Playback from DVD & CD of MP3 & MP4  
Playback from 64GB SD/USB of MP3 & MP4  
ID3 MP3 Tag Reading for Track Information  
AUX Audio Input for Personal Media Devices  
10-Band Audio Equalizer w/ User Presets  
Front & Rear Pre-Amp Audio Outputs  
Variable Subwoofer Pre-Amp Output

Video Output for Auxiliary Devices  
Rear View Camera Input w/ Trigger  
300w 4ch. MOSFET Speaker Outputs  
Custom Backgrounds & Screen Savers  
Multi-Region FM Frequency Stepping  
800x480 Widescreen Resolution  
400NIT LED Backlight

# MobileLink X2 AVN SOURCE UNITS

## PDN-626B

2-DIN GPS Navigation, MHL MobileLink X2, DVD, Bluetooth, CD/USB/MP3 Car Stereo w/ 6.2" LCD



## PDN-726B

1-DIN GPS Navigation, MHL MobileLink X2, DVD, Bluetooth, CD/USB/MP3 Car Stereo w/ Motorized 7" LCD





# MULTIMEDIA SOURCE UNITS



**Bluetooth™**

Bluetooth V3.0 with Enhanced Data Rate increases traditional data transfer rates to 2.1 Mbit/s. This lighting quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback. Most Bluetooth enabled Smartphones will transfer phone book contacts, view recent call logs, and stream MP3 audio tracks.




Customizing options include several preloaded background images & color changing graphic user interface. Select models include variable color front panel illumination. Choose a specific color to match your interior lighting scheme or random color change for a full color spectrum effect.



## PD-624B

2-DIN DVD, CD/MP3, SD/USB, AM/FM Receiver, w/ 6.2" LCD, & Bluetooth

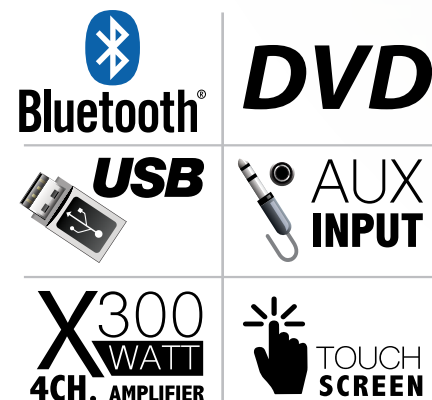

# MULTIMEDIA SOURCE UNITS


## PD-724B

1-DIN DVD, CD/MP3, SD/USB, AM/FM Receiver, w/ Motorized 7" LCD, & Bluetooth



## PD-454B

1-DIN DVD, CD/MP3, SD/USB, AM/FM Receiver w/ Detachable 4.5" LCD & Bluetooth

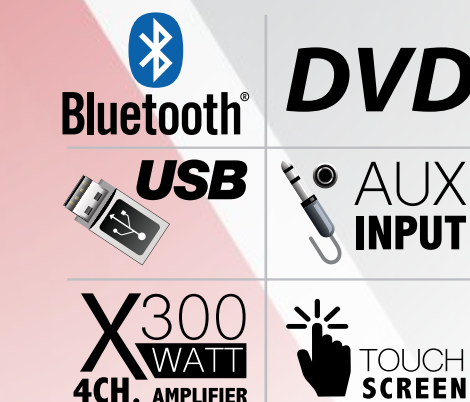

### Series Standard Features:

Bluetooth V3.0 Hands-Free Calling from Enabled Phone  
A2DP Wireless MP3 Audio Playback from Enabled Phone  
Accepts OEM Steering Wheel Control Interfaces  
Custom Backgrounds & RGB Color Changing GUI  
Advanced FM/AM Tuner with RDBS Receiver  
Playback from DVD & CD of MP3 & MP4

Playback from 32GB SD/USB of MP3 & MP4  
ID3 MP3 Tag Reading for Track & Information  
AUX Audio Input for Personal Media Devices  
RCA A/V Input for Auxiliary Sources  
4-Band Audio Equalizer w/ User Presets  
Front & Rear Pre-Amp Audio Outputs  
Variable Subwoofer Low Pass Crossover





Variable Subwoofer Pre-Amp Output  
Video Output for Auxiliary Devices  
Rear View Camera Input w/ Trigger  
300w 4ch. MOSFET Speaker Outputs  
Multi-Region FM Frequency Stepping  
800x480 Widescreen Resolution  
400NIT LED Backlight



# MULTIMEDIA SOURCE UNITS





**PD-651B**  
2-DIN Multimedia Source Unit w/ 6.5" LCD Touch Screen w/ Bluetooth



|  |  |
|--|--|
| <br><b>Bluetooth®</b> | <b>DVD</b>   |
| <br><b>USB</b>        | <br><b>AUX INPUT</b>    |
| <b>X300WATT</b><br>4CH. AMPLIFIER  | <br><b>TOUCH SCREEN</b> |

**PTID-8920B**  
1-DIN Multimedia Source Unit w/ 7" Flip-Up LCD Touch Screen w/ Bluetooth







|  |  |
|--|--|
| <br><b>Bluetooth®</b> | <b>DVD</b>   |
| <br><b>USB</b>        | <br><b>AUX INPUT</b>    |
| <b>X300WATT</b><br>4CH. AMPLIFIER  | <br><b>TOUCH SCREEN</b> |

**ADDITIONAL SERIES DETAILS:**  
Bluetooth V2.0 Hands Free Calling From Enabled Devices  
A2DP Wireless MP3 Audio Playback From Enabled Devices  
Accepts OEM Steering Wheel Control Interface  
Playback from DVD & CD of MP3 & MP4  
Playback from 32GB SD/USB of MP3 & MP4  
ID3 MP3 Tag Reading for Track & Artist Information  
AUX A/V Input for Personal Media Devices  
Front & Rear Pre-Amp Audio Outputs

# MULTIMEDIA SOURCE UNITS

**PD-710B** (w/ Bluetooth V2.0)  
1-DIN Multimedia Source Unit w/ Detachable 7" LCD Touch Screen



|  |  |
|--|--|
| <br><b>Bluetooth®</b> | <b>DVD</b>   |
| <br><b>USB</b>        | <br><b>AUX INPUT</b>    |
| <b>X300WATT</b><br>4CH. AMPLIFIER  | <br><b>TOUCH SCREEN</b> |

**PADVD-390**  
1-DIN DVD Player w/32GB SD/USB Playback

Playback from DVDR/RW of MP4 &  
Playback from 32GB USB of MP4, &  
In-Dash, Floor, & Vertical Mounting Brackets Included  
DIN Size Trim Ring For In-Dash Mounting Included  
Flash Memory for Last Position Recall  
Remote Control & IR Repeater Included  
OSD On Screen Display  
Digital Anti-shock  
A/V Pre-amp Outputs, 2V  
Dimensions: 6.4" x 6.2" x 2"



**DVD**  **USB**

Subwoofer Pre-Amp Audio Output  
Video Output for Auxiliary Devices  
Rear View Camera Input w/ Trigger  
300w 4ch. MOSFET Speaker Outputs  
Custom & Preset Equalizer Settings  
Multi-Region FM Frequency Stepping  
800x480 Widescreen Resolution  
400 NIT LED Brightness



# CD AUDIO SOURCE UNITS

## PCD-52B

2-DIN CD/MP3, AM/FM Receiver w/ SD/USB Playback w/ Bluetooth



Bluetooth®



SD



USB



AUX  
INPUT



X300  
WATT  
4CH. AMPLIFIER



### ADDITIONAL SERIES DETAILS:

Bluetooth V2.0 Hands Free Calling from Enabled Phone  
A2DP MP3 Audio Playback from Enabled Device  
Playback from 32GB USB of MP3 & WMA  
Playback from CD, CDR, CDRW of MP3 & WMA  
AUX Audio Input for Personal Media Devices  
Front & Rear Pre-Amp Output

300w 4ch MOSFET Speaker Outputs  
Custom & Pre-Set Equalizer Settings  
Audio Staging Controls  
12/24 Hour Digital Clock  
Remote Control Included  
Theft Deterrent detachable face (1-Din Only)  
Faceplate Carry Case Included

## PCD-51B

(w/ Bluetooth V2.0)  
1-DIN CD/MP3 Player, AM/FM Receiver w/ SD/USB Playback





Bluetooth®



SD



USB



AUX  
INPUT



X300  
WATT  
4CH. AMPLIFIER

# DIGITAL AUDIO SOURCE UNITS

## PL-52B

2-DIN Digital Media Receiver w/ SD/USB Playback  
& AM/FM Receiver w/ Bluetooth



Bluetooth®



SD



USB



AUX  
INPUT



X300  
WATT  
4CH. AMPLIFIER



### ADDITIONAL SERIES DETAILS:

Bluetooth V3.0 Hands Free Calling From Enabled Devices  
A2DP Wireless MP3 Audio Playback From Enabled Devices  
Playback from 32GB SD/USB of MP3 & MP4  
ID3 MP3 Tag Reading for Track & Artist Information  
AUX Audio Input for Personal Media Devices  
Front & Rear Pre-Amp RCA Outputs

Subwoofer Pre-Amp RCA Output  
300w 4ch. MOSFET Speaker Outputs  
Custom & Preset Equalizer Settings  
Remote Control Included  
Theft Deterrent detachable face (1-Din Only)  
Multi-Region FM Frequency Stepping

## PL-51B

Detachable (w/ Bluetooth V2.0)  
1-DIN Digital Media Receiver w/ SD/USB Playback & AM/FM Receiver



Bluetooth®



SD



USB



AUX  
INPUT



X300  
WATT  
4CH. AMPLIFIER





# OVERHEAD ENTERTAINMENT

## PMD-143H

Ceiling Mount DVD Entertainment System w/  
High Definition 14.3" LCD & MHL MobileLink Input

**MobileLink Mirrors the Image of Your Smart-  
phone Or Tablet To The Ceiling Monitor via HDM-  
A3 Interface Cable (sold separate). Powered by MHL.**

Interchangeable Color Skins (beige, black, grey)  
Car-Spec DVD Drive for Extreme Temperature Exposure  
MHL MobileLink Input for Smart Device Connectivity  
Playback from DVDR/RW of 720p MP4  
Playback from 32GB SD Card or USB of 720p MP4  
Flash Memory for Last Position Recall  
Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)  
8-ch FM Stereo Transmitter for OEM Integration  
RCA A/V Input for Auxiliary Sources  
RCA A/V Output for Multiple Component Integration  
Triggered Bright White LED Dome Light  
NTSC / PAL Auto Selection  
1,366 x 768 16:9 Widescreen Resolution  
400 NIT Screen Brightness  
Dimensions: 16"w x 7.5"d x 2"h



**HDM-A3** - MHL MobileLink Smartphone Mirroring Interface Cable  
for Select Andriod Devices

**HDM-i4** - MHL MobileLink Smartphone Mirroring Interface Cable  
For Select iOS Devices

5ft interface cable unlocks 1080p video and audio playback from enabled mobile  
devices. Each interface cable features the appropriate micro connector for your mobile  
device. Power Acoustik MobileLink Interface cables also charge your mobile device.  
Available for select Android and iOS devices.



## PMD-112 - w/ DVD

### PT-110CM - A/V Only

Ceiling Mount Entertainment System w/ 11.2" LCD

Interchangeable Color Skins (beige, black, grey)  
45°/45° Swivel Screen for Angled Viewing  
Car-Spec DVS DVD Drive for Extreme Temperature Exposure  
Playback from DVDR/RW of 720p MP4  
Playback from 32GB SD Card or USB of 720p MP4  
Flash Memory for Last Position Recall  
Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)  
8-ch FM Stereo Transmitter for OEM Integration  
A/V Input for Auxiliary Sources  
Rear Panel RCA A/V Input for Game Console  
A/V Output for Multiple Component Integration  
Rear Panel Play/Pause Control  
Triggered Bright White LED Dome Light  
Full Function Remote Control Included  
NTSC / PAL Auto Selection  
800 x 480 16:9 Widescreen Resolution  
400 NIT Screen Brightness  
Dimensions: 14"w x 12.5"d x 2.5"h



# OVERHEAD ENTERTAINMENT

## PMD-104X

Ceiling Mount DVD Entertainment System w/ 10.3" LCD

10.3" High Resolution LCD Screen  
1,024 x 600 16:9 Widescreen Resolution  
Interchangeable Color Skins (beige, black, grey)  
Automotive-Spec DVD Transport for Extreme Conditions  
Playback from DVDR/RW of MP4 & AVI  
Playback from 32GB SD/MMC or USB of 1080p MP4, AVI, or  
RCA A/V Input from Auxiliary Sources  
Rear Panel RCA A/V Input from Game Console  
Pre-Amp Audio Outputs  
Single Channel Wireless IR Transmitter (use HP-10S or HP-11S)  
330 Ch. FM Stereo Transmitter for OEM Integration  
Full Function Remote Control Included  
NTSC / PAL Auto Selection  
400 NIT Screen Brightness  
Dimensions: 13"w x 11"d x 2.5"h



## PMD-102X

Ceiling Mount DVD Entertainment System w/ 10.2" LCD

Interchangeable Color Skins (beige, black, grey)  
45°/270° Swivel Screen for Angled Viewing  
Playback from DVDR/RW of 720p MP4  
Playback from 32GB USB of 720p MP4  
Flash Memory for Last Position Recall  
FM Stereo Transmitter for OEM Integration  
Single Channel Wireless IR Transmitter (use HP-10S, HP-11S)  
A/V Output for Multiple Component Integration  
A/V Inputs for Auxiliary Sources  
Rear Panel RCA A/V Input for Game Console  
Rear Panel Play/Pause Control  
Triggered Bright White LED Dome Light  
Full Function Remote Control Included  
NTSC / PAL Auto Selection  
1,024x600 16:9 Widescreen Resolution  
400 NIT Screen Brightness  
Dimensions: 11.5"w x 11"d x 2.5"h



## PMD-90

Ceiling Mount DVD Entertainment System w/ 9" LCD

Interchangeable Color Skins (beige, black, grey)  
45°/45° Swivel Screen for Angled Viewing  
Playback from DVDR/RW of 720p MP4 & Other Video Formats  
Playback from 32GB SD/USB of 720p MP4 & Other Video Formats  
Single Channel Wireless IR Transmitter (use HIR-1 or HP-11S)  
8-ch FM Stereo Transmitter for OEM Integration  
A/V Input for Auxiliary Sources  
A/V Output for Multiple Component Integration  
Triggered Bright White LED Dome Light  
NTSC / PAL Auto Selection  
800 x 480 16:9 Widescreen Resolution  
400 NIT Screen Brightness  
Dimensions: 11"w x 9.75"d x 2.5"h





# REAR SEAT ENTERTAINMENT

- HDVD-94T** - Universal Replacement Headrest w/ DVD Player & 9" Touchscreen LCD
- HDVD-94** - Universal Replacement Headrest w/ DVD Player & 9" LCD
- H-94** - Universal Replacement Headrest w/ 9" LCD



**ADDITIONAL SERIES DETAILS:**  
 Forward/Backwards Tilting Headrest w/ 9" Touchscreen LCD  
 3 Changeable Color Skins Included (grey, beige, black)  
 Playback from DVDR/RW of 720p MP4 (HDVD only)  
 Playback from 32GB SD Card or USB of MP4 (HDVD only)  
 Dual Channel Wireless IR Transmitter (use HIR-2 or HP-12S)  
 FM Stereo Transmitter for OEM Integration (HDVD only)  
 AUX A/V Input for Game Console or Personal Media Devices  
 RCA A/V Input for Auxiliary Source or Opposite Headrest

RCA A/V Output to Auxiliary Source or Opposite Headrest  
 Hardwired Headphone Output  
 3/8" Locking Pole w/ 1/2" & 9/16" Adapters  
 4.75" ~ 8.25" Pole Width Adjustment  
 NTSC / PAL Auto Selection  
 800 x 480 16:9 Widescreen Resolution  
 400 NIT Screen Brightness  
 Dimensions: 11.5"w x 8.5"h x 5"d

# REAR SEAT ENTERTAINMENT

- HDVD-91CC**  
Universal Replacement Headrest w/ DVD Player & 9" LCD
- H-91CC**  
Universal Replacement Headrest w/ 9" LCD
- HDVD-71CC**  
Universal Replacement Headrest w/ DVD Player & 7" LCD
- H-71CC**  
Universal Replacement Headrest w/ 7" LCD



**ADDITIONAL SERIES DETAILS:**  
 Forward/Backwards Tilting Headrest  
 3 Changeable Color Skins Included (grey, beige, black)  
 Playback from DVDR/RW of 720p MP4 (HDVD only)  
 Playback from 32GB SD Card or USB of MP4 (HDVD only)  
 Dual Channel Wireless IR Transmitter (use HIR-2 or HP-12S)  
 FM Stereo Transmitter for OEM Integration (HDVD only)  
 AUX A/V Input for Game Console or Personal Media Devices  
 RCA A/V Input for Auxiliary Source or Opposite Headrest


RCA A/V Output to Auxiliary Source or Opposite Headrest  
 Hardwired Headphone Output  
 3/8" Locking Pole w/ 1/2" & 9/16" Adapters  
 4.75" ~ 8.25" Pole Width Adjustment  
 NTSC / PAL Auto Selection  
 800 x 480 16:9 Widescreen Resolution  
 400 NIT Screen Brightness  
 Dimensions: 11.5"w x 8.5"h x 6"d (91CC)  
 Dimensions: 10"w x 7"h x 5.5"d (71CC)



# REAR SEAT ENTERTAINMENT

**PHD-101**  
Universal Headrest Mount DVD Player w/ 10.3" LCD

NEW FOR  
**2017**

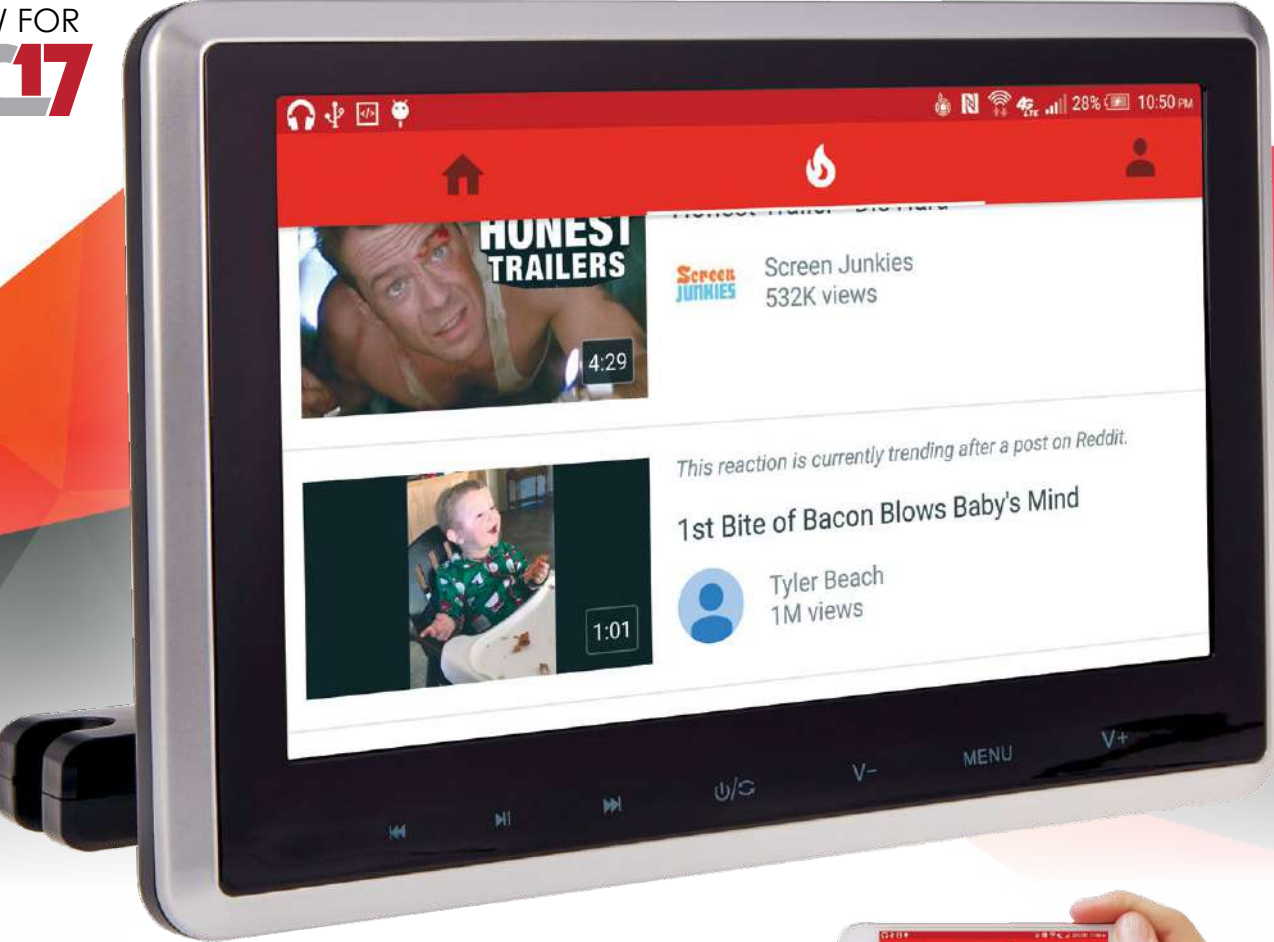

Bracket Mount DVD Player Solution for Vehicles w/ Active Headrest  
Rear Loading DVD Player for DVD/RW 720P Playback  
MHL MobileLink Input for Smart Device Connectivity  
32GB USB & SD Card Readers for MP4 Playback  
Single Channel Wireless IR Transmitter (use HP-11S)  
FM Stereo Transmitter for Easy OEM Integration  
AUX A/V Input for Game Console or Personal Media Devices  
RCA A/V Input for Auxiliary Source or Opposite Headrest  
RCA A/V Output to Auxiliary Source or Opposite Headrest  
3.5mm Hardwired Headphone Output Jack  
4.75"-8.25" Pole Width Adjustment  
NTSC / PAL Auto Selection  
800 x 480 16:9 Widescreen Resolution  
400 NIT Screen Brightness



**HDM-A3** - MHL MobileLink Smartphone Mirroring Interface Cable  
for Select Andriod Devices  
**HDM-i4** - MHL MobileLink Smartphone Mirroring Interface Cable  
For Select iOS Devices

5ft interface cable unlocks 1080p video and audio playback from enabled mobile devices. Each interface cable features the appropriate micro connector for your mobile device. Power Acoustik MobileLink Interface cables also charge your mobile device. Available for select Android and iOS devices.



# REAR SEAT ENTERTAINMENT

**PHAD-7**  
Universal Headrest Mount DVD Player w/ 7" LCD

Bracket Mount DVD Player Solution for Vehicles w/ Active Headrest  
Front Loading DVD Player for DVD/RW 720P Playback  
32GB USB & SD Card Readers for MP4 Playback  
Dual Channel Wireless IR Transmitter (use HP-12S)  
FM Stereo Transmitter for Easy OEM Integration  
AUX A/V Input for Game Console or Personal Media Devices  
RCA A/V Input for Auxiliary Source or Opposite Headrest  
RCA A/V Output to Auxiliary Source or Opposite Headrest  
3.5mm Hardwired Headphone Output Jack  
3 Changeable Colors Skins Included (grey, beige, & black)  
4.75"-8.25" Pole Width Adjustment  
Various Pole Diameter Adapters Included  
NTSC / PAL Auto Selection  
800 x 480 16:9 Widescreen Resolution  
400 NIT Screen Brightness



**PT-712IRA**  
7" Dual Channel IR Headrest Monitor

Two Auxiliary A/V Input  
Dual Channel IR Transmitter  
Wired Headphone Output  
Low Reflection TFT-LCD Monitor  
Ultra Bright LED Backlighting  
Selectable Aspect Modes

Preset/Manual Image Control  
Dimmer Control  
Remote Control  
NTSC/PAL Selection  
480 x 234 (16:9) Image Resolution  
Cutout Dimensions: 7" w x 4.75" h x .75" d



**PT-700MHR**  
7" LCD Headrest Monitor

7" Amorphous Active Matrix TFT/LCD Monitor  
Ultra Bright LED Backlighting  
Ignition Power On/Off Optional  
Single Video Input  
Selectable Aspect Modes  
Preset/Manual Image Control  
NTSC/PAL Selection

Sculptured Trim Ring Included  
Remote Control Included  
480 x 234 (16:9) Image Resolution  
400NIT Panel Brightness  
Cutout Dimension: 7" w x 4.5" h x 1" d







# WIRELESS HEADPHONES

- HIR-1W** - Single 1ch. IR Headphone - White
- HIR-1B** - Single 1ch. IR Headphone - Black
- HIR-2W** - Single 2ch. IR Headphone - White
- HIR-2B** - Single 2ch. IR Headphone - Black

Single 1ch or 2ch Infrared Headphone  
Available in Graphite Black or Snow White  
Independently Swiveling Ear Cup  
Ear Cup Fold Flat for Convenient Storage  
Soft Comfortable Faux Leather Ear Pad  
Adjustable Headband w/ Silicone Headliner  
Built-in Momentary Mute Switch  
25ft Maximum Operational Range

Auto Off Timer Increases Battery Life  
40mm Mylar Extended Frequency Driver  
Variable Volume Level Control  
Soft Touch Cinch Carry Bag Included  
Requires 2 AAA Batteries (included)  
Ch. 1: L 2.3mHz, R 2.8mHz  
Ch. 2: L 3.2mHz, R 3.8mHz

## HP-10S Single 1ch. IR Headphone

EVA hard carrying case included  
Foldable Ear Pads for Compact Storage  
On/Off Switch Saves Battery Life  
Auto Power Off Function  
Auto Mute Function  
Variable Volume Control  
ALC Auto Level Control



## HP-12S Single 2ch. IR Headphone

Adjustable Headphone Straps  
Channel Selectable From Each Headphone  
Ear Pads Fold Flat for Seat Pocket Storage  
EVA hard Carry Case Included  
MP-3 Player Input Via 3.5mm Jack  
On/Off Switch Saves Battery Life  
Auto Power Off Function  
Auto Mute Function  
Variable Volume Control  
ALC Auto Level Control



## WLHP-100 Single 1ch. IR Headphone

## WLHP-200 Single 2ch. IR Headphone

Adjustable Headphone Straps  
Single Channel UHF IR Receiver  
ON/OFF Switch Saves Battery Life  
Variable Volume Control  
ALC Auto Level Control  
Auto Off and Auto Mute



## HP-11S Single 1ch. IR Headphone

## HP-22IRT Pair 1ch. IR Headphones and Transmitter

Ear Pads Fold Flat for Seat Pocket Storage  
Adjustable Headphone Straps  
EVA hard Carry Case Included  
MP-3 Player Input Via 3.5mm Jack  
On/Off Switch Saves Battery Life  
Auto Power Off Function  
Auto Mute Function  
Variable Volume Control  
ALC Auto Level Control



## HP-900S Single 2ch. 900MHz Headphone

## HP-902RFT Pair 2ch. 900MHz Headphones & Transmitter

Dual Stereo Audio Inputs  
Channel Selectable From Each Headphone  
100ft. Operational Distance  
Adjustable Headphone Straps  
Ear Pads Fold Flat for Seat Pocket Storage  
EVA hard Carry Case Included  
MP-3 Player Input Via 3.5mm Jack  
On/Off Switch Saves Battery Life  
Auto Power Off Function  
Auto Mute Function  
Variable Volume Control  
ALC Auto Level Control



## EFM-02

### PLL FM Modulator

PLL Phase Lock Loop Tuner Outputs  
Frequency Settings Via Slide Switch  
Ground Loop Isolator Circuit  
Shielded Metal Housing For Noise Rejection



## VB-1

### One In & Four Output Video Signal Booster

Four Individual Output Trimmer Gain Controls  
Shielded Metal Housing For Noise Rejection  
4 Video Output Gain control



# REAR VIEW CAMERAS

## LP-2CSB - Full Frame

## L-3CSB - Partial Frame

License Plate Mount Night Vision Camera w/ Back-Up Sensors,  
On-Screen Distance Gauge, & Proximity Alerts

U.S. Patent #7,106,183 B2  
Object Sensors w/ Proximity Alert  
1/4" CCD Color Camera  
0.5 LUX Low Light Lens  
Waterproof Camera Housing  
Waterproof External Wire Connections  
Vertically Pivoting Camera Housing  
7' Effective Viewing Distance  
Inconspicuous Speaker for Alerts  
8 IR LEDs for Night Viewing  
On-Screen Distance Gauge  
130° Capture Angle  
RCA Video Output  
Cast Steel Alloy Frame  
Reversed Image  
640 x 480 Resolution



L-3CSB



## CAM-4LF - Full Frame

## CAM-3L - Partial Frame

### Black Chrome License Plate Mount Rear View Camera

Zinc Alloy Metal License Plate Frame  
Vertically Pivoting Camera Housing  
On-Screen Distance Gauge  
1/4" CCD Wide View Color Camera  
0.1 LUX Low Light Lens  
163° Capture Angle  
RCA Video Output  
Reversed Image  
648 x 488 Resolution



CAM-3L



CAM-4LF

## CAM-2 - Surface Mount

## CAM-1 - Under Trunk Lid

### Rear View Camera

Waterproof Zinc Camera Housing  
On-Screen Distance Gauge  
1/4" CCD Color Camera  
0.1 Lux Low Light Lens  
163° Capture Angle  
RCA Video Outputs  
Reversed Image  
648 x 488 Resolution



Vertically Pivoting Mounting Bracket



CAM-1

Threaded Under Trunk Lid Mounting





Class A/B Full Range & Class D Monoblock Amplifiers  
2-ohm Stereo & 4-ohm Bridged Full Range Operation  
1-ohm Stable Monoblock Operation for MAX Power  
Bridge 2 Monoblocks Together for Double Power!  
Die-Cast Aluminum Alloy Heatsink for Optimum Dissipation  
MOSFET Power Supply w/ Audiophile Grade IRTM Transistors  
Military Grade SMT PCB Maintains Dynamic Performance  
Direct Short, Thermal, & Overload Circuits Protect Amplifier  
Easy DIY Install Single Sided Terminals & Controls  
Angled Wire Terminals Secure Wire Connections  
Chassis Integrated Aluminum Mounting Points  
Variable 12dB High Pass, Low Pass, & Subsonic Crossovers  
200mV-6V Low Level RCA Inputs  
4g Power Wire & 8g Speaker Wire Outputs  
12dB Bass Boost Increases Low Octave Harmonics  
180° Phase Shift Improves Low Octave Dynamics (monoblock)  
Dash Mount Gain Control Module Included (select models)

| Class A/B   | Max Power | RMS Power             | RMS Power         | RMS Power        | Dimensions       | Gain Control |
|-------------|-----------|-----------------------|-------------------|------------------|------------------|--------------|
| Full Range  | (watts)   | 4Ω Bridged, 14.4V     | 2Ω, 14.4V         | 4Ω, 14.4V        | (2.25"h x 8.5"w) | Included     |
| BAMF4-1200  | 1,200w    | 2 x 300               | 4 x 150           | 4 x 75           | 11.25"           | -            |
| BAMF4-1800  | 1,800w    | 2 x 450               | 4 x 225           | 4 x 110          | 13.25"           | -            |
| BAMF5-2500  | 2,500w    | 2 x 200+ 1 x 850 (2Ω) | 4 x 100 + 1 x 850 | 4 x 50 + 1 x 425 | 17"              | Included     |
| BAMF1-3000D | 3,000w    | 1 x 1,500 (1Ω)        | 1 x 1,000         | 1 x 700          | 11.25"           | Included     |
| BAMF1-5000D | 5,000w    | 1 x 2,500 (1Ω)        | 1 x 1,700         | 1 x 1,100        | 13.25"           | Included     |
| BAMF1-8000D | 8,000w    | 1 x 4,000 (1Ω)        | 1 x 2,700         | 1 x 1,800        | 17"              | Included     |



Class A/B Full Range & Class D Monoblock Amplifiers  
2-ohm Stereo & 4-ohm Bridged Full Range Operation  
1-ohm Stable Monoblock Operation for MAX Power  
Bridge 2 Monoblocks Together for Double Power!  
Military Grade PCB w/ PWM MOSFET Power Supply  
Direct Short, Thermal, & Overload Circuit Protection  
High/Speaker Level & Low Level/RCA Input  
200mV-6V Low Level RCA Input  
Pre-Amp Low-Level RCA Outputs (select models)  
4g Power Wire & 8g Speaker Wire Outputs  
Variable 12dB High & Low Pass Crossovers  
12dB Bass Boost Increases Low Octave Harmonics  
180° Phase Shift Improves Low Octave Dynamics (monoblock)  
Dash Mount Remote Control Included (select models)



Dash Mount Gain Control Included

| Edge       | Max Power | RMS Power            | RMS Power         | RMS Power        | Dimensions     | Gain Control |
|------------|-----------|----------------------|-------------------|------------------|----------------|--------------|
| Amplifiers | (watts)   | 4Ω Bridged, 14.4V    | 2Ω, 14.4V         | 4Ω, 14.4V        | (2.25"h x 9"w) | Included     |
| EG2-1400   | 1,400w    | 1 x 700              | 2 x 350           | 2 x 175          | 12.75"         | -            |
| EG4-1000   | 1,000w    | 2 x 250              | 4 x 125           | 4 x 65           | 10.25"         | -            |
| EG4-1500   | 1,500w    | 2 x 370              | 4 x 185           | 4 x 95           | 12.75"         | -            |
| EG5-2800   | 2,800w    | 2 x 320 + 1 x 760 2Ω | 4 x 160 + 1 x 760 | 4 x 80 + 1 x 380 | 19.75"         | Included     |
| EG1-2500D  | 2,500w    | 1,250 x 1 (1Ω)       | 800 x 1           | 400 x 1          | 10"            | Included     |
| EG1-4500D  | 4,500w    | 2,250 x 1 (1Ω)       | 1,500 x 1         | 750 x 1          | 13"            | Included     |
| EG1-7000D  | 7,000w    | 3,500 x 1 (1Ω)       | 2,300 x 1         | 1,100 x 1        | 16.25"         | Included     |
| EG1-10000D | 10,000w   | 5,000 x 1 (0.5Ω)     | 3,300 x 1 (1Ω)    | 1,600 x 1 (2Ω)   | 20.50"         | Included     |



# RAZOR

## AMPLIFIERS

# CALIBER

## AMPLIFIERS

We're in a time where small is "in". Smaller, more economic vehicles are more and more desirable. But that doesn't mean you have to sacrifice big power for your system. Razor amplifiers pack huge power into small chassis thanks to efficient Full-Range Class D topology and SMT circuitry. Complimented with every possible preamp adjustment, the Razor amplifiers leave nothing to be desired...



Dash Mount Gain Control Included

Compact 4.75" Chassis Design for Installation Versatility  
MOSFET Power Supply w/ Audiophile Grade IR™ Transistors  
Military Grade SMT PCB Maintains Dynamic Performance  
2-ohm Stereo & 4-ohm Bridged Full Range Operation  
2-ohm Minimum Impedance Stability (monoblocks)  
Direct Short, Thermal, & Overload Circuits Protect Amplifier  
200mv-6V Low Level RCA Inputs  
High Level Input w/ Signal Sense Auto Turn-on  
Variable 12dB High Pass & Low Pass Crossovers  
10-50Hz Variable 12dB Subsonic Crossover Protects Subwoofers  
12dB Bass Boost Increases Low Octave Harmonics (monoblocks)  
Dash Mount Gain Control Module Included (select models)

Installs in Virtually ANY Location!  
90% Efficient Full Range Class D Technology



| RAZOR CLASS D | Max Power (watts) | RMS Power 4Ω Bridged, 14.4V | RMS Power 2Ω, 14.4V | RMS Power 4Ω, 14.4V | Dimensions (4.75" w x 1.625" h) | Gain Control Included |
|---------------|-------------------|-----------------------------|---------------------|---------------------|---------------------------------|-----------------------|
| RZ2-1300D     | 1,300             | 1 x 540                     | 2 x 270             | 2 x 185             | 5.5"                            | Included              |
| RZ4-1200D     | 1,200             | 2 x 300                     | 4 x 150             | 4 x 100             | 9"                              | -                     |
| RZ4-2000D     | 2,000             | 2 x 500                     | 4 x 250             | 4 x 190             | 11"                             | -                     |
| RZ4-3000D     | 3,000             | 2 x 750                     | 4 x 375             | 4 x 285             | 12.25"                          | -                     |
| RZ5-2500D     | 2,500             | 300 x 2 + 600 x 1           | 150 x 4 + 600 x 1   | 100 x 4 + 400 x 1   | 12.25"                          | Included              |
| RZ1-1500D     | 1,500             | -                           | 1 x 900             | 1 x 600             | 10"                             | Included              |
| RZ1-2300D     | 2,300             | -                           | 1 x 1,400           | 1 x 900             | 11"                             | Included              |
| RZ1-3500D     | 3,500             | 1 x 2,100                   | 1 x 1,400           | 1 x 900             | 12.25"                          | Included              |



NEW FOR  
2017


Dash Mount Gain Control Included

Class A/B Full Range & Class D Monoblock Amplifiers  
2-ohm Stereo & 4-ohm Bridged Full Range Operation  
1-ohm Stable Monoblock Operation for MAX Power  
Bridge 2 Monoblocks Together for Double Power!  
Military Grade PCB w/ PWM MOSFET Power Supply  
Direct Short, Thermal, & Overload Circuit Protection  
High/Speaker Level & Low Level/RCA Input  
200mV-6V Low Level RCA Input

Pre-Amp Low-Level RCA Outputs (select models)  
4g Power Wire & 8g Speaker Wire Outputs  
Variable 12dB High & Low Pass Crossovers  
12dB Bass Boost Increases Low Octave Harmonics  
180° Phase Shift Improves Low Octave Dynamics (monoblock)  
Dash Mount Remote Control Included (select models)

| CALIBER AMPLIFIERS | Max Power (watts) | RMS Power 4Ω Bridged, 14.4V | RMS Power 2Ω, 14.4V | RMS Power 4Ω, 14.4V | Dimensions (9.50w x 2" h) | Gain Control Included |
|--------------------|-------------------|-----------------------------|---------------------|---------------------|---------------------------|-----------------------|
| CB4-1200           | 1,200             | 2 x 300                     | 4 x 150             | 4 x 120             | 13"                       | -                     |
| CB4-1800           | 1,800             | 2 x 450                     | 4 x 225             | 4 x 180             | 15.25"                    | -                     |
| CB1-2500D          | 2,500             | 1 x 1,250 (1Ω)              | 1 x 850             | 1 x 500             | 12"                       | Included              |
| CB1-4500D          | 4,500             | 1 x 2,200 (1Ω)              | 1 x 1,500           | 1 x 900             | 13.25"                    | Included              |
| CB1-8000D          | 8,000             | 1 x 4,000 (1Ω)              | 1 x 2,500           | 1 x 1,500           | 18"                       | Included              |





# SUBWOOFER

MOFO X subwoofers are refined and increase efficiency dramatically! MOFO-X subs use a composite sandwich cone with a polypropylene surface for durability and Spruce pulp backing for smooth low bass. Like the original MOFOs, the new models still use an aluminum dustcap that couples to the voice coil former and extends over the cone. Why? The fins brace the cone and eliminate cone flex during high excursion. And since they are aluminum and couple to the voice coil, they act as a heatsink or heat extractor. Using the latest materials, the new MOFO subs yield superior performance. Cast aluminum baskets? Of course! Increased bottom octave output? You Bet! Louder than the original design? Duh!!

NEW FOR  
2017



Pre-Assembled Re-cone Kit Available

Overcompensating Motor Structure for Increased Magnetic Strength  
12mm T-Yoke & Top Plate Improve Low Frequency Dynamics  
Vented T-Yoke & Frame Reduces Voice Coil Heat Build-up  
Die Cast Aluminum Heatsink Dust Cap Absorbs Voice Coil Heat  
Aluminum Dust Cap Fins Dissipate Heat & Strengthen Cone  
Non-Magnetic Non-Resonate Die-Cast Aluminum Frame  
2.5" 4-Layer Voice Coil w/ Large Gauge Wire Increases Power

High-Temperature Tolerance Adhesives Resist Thermal Failure  
Nickel Plated 8ga Spring-Loaded Compression Wire Terminals  
Non-Transfer Spruce Pulp Cone w/ UV & Chemical Protection  
High Density Polyether Foam Surround w/ UV & Chemical Protection  
Dual Poly-Cotton Suspension Dampen Violent Accelerations  
Stitched Voice Coil Leads Prevent Potential Damage  
1-pc Gasket/Trim Ring w/ Concealed Mounting Holes Included

| MOFO Subwoofers | Max Power Handling | RMS Power Handling | Efficiency (1w/1m) | Voice Coil Configuration | Motor Volume | Mounting Depth | Optimum Sealed Enclosure ft³ | Optimum Ported Enclosure ft³ |
|-----------------|--------------------|--------------------|--------------------|--------------------------|--------------|----------------|------------------------------|------------------------------|
| MOFO-104X       | 2,400              | 1,200              | 83.48              | 2.50" Dual 4Ω            | 288oz.       | 6.125"         | 0.75                         | 1.25                         |
| MOFO-102X       | 2,400              | 1,200              | 83.62              | 2.50" Dual 2Ω            | 288oz.       | 6.125"         | 0.75                         | 1.25                         |
| MOFO-124X       | 2,700              | 1,500              | 85.40              | 2.50" Dual 4Ω            | 373oz.       | 6.875"         | 1.00                         | 2.00                         |
| MOFO-122X       | 2,700              | 1,500              | 85.37              | 2.50" Dual 2Ω            | 373oz.       | 6.875"         | 1.00                         | 2.00                         |
| MOFO-154X       | 3,000              | 1,700              | 86.97              | 2.50" Dual 4Ω            | 373oz.       | 8.125"         | 2.00                         | 4.00                         |
| MOFO-152X       | 3,000              | 1,700              | 86.90              | 2.50" Dual 2Ω            | 373oz.       | 8.125"         | 2.00                         | 4.00                         |



# SUBWOOFER

NEW FOR  
2017

BAMF subwoofers are the newest secret weapon for you bass BURP fanatics! These beasts are engineered for the most extreme conditions. Massive 3" 4-layer voice coils built on an aluminum former can take the heat. Freakishly oversized motor structures provide more magnetic inertia than is ever necessary for a woofer. Spruce tree pulp cones, high density extended excursion foam surround, and hybrid suspension dampers work together to contain the momentum to a shattering roar...



Overcompensating Motor Sturcture for Increased Magnetic Strength  
12mm T-Yoke & Top Plate Improve Low Frequency Dynamics  
Vented T-Yoke & Frame Reduces Voice Coil Heat Build-up  
Non-Magnetic Non-Resonate Die-Cast Aluminum Frame  
3" 4-Layer Voice Coil w/ Direct Connect Wire Increases Power Handling

High-Temperature Tolerance Adhesives Resist Thermal Failure  
Non-Transfer Spruce Pulp Cone w/ UV & Chemical Protection  
Sitched and Glued Surround/Cone Joints for Strongest Bonding  
Extended Excursion Polyether Foam Surround w/ UV Protection  
Dual Poly-Cotton Suspension Dampen Violent Accelerations  
Stitched Voice Coil Leads Prevent Potential Damage  
1-pc Gasket/Trim Ring w/ Concealed Mounting Holes Included

| BAMF Subwoofers | Max Power Handling | RMS Power Handling | Efficiency (1w/1m) | Voice Coil Configuration | Motor Volume | Mounting Depth | Optimum Sealed Enclosure ft³ | Optimum Ported Enclosure ft³ |
|-----------------|--------------------|--------------------|--------------------|--------------------------|--------------|----------------|------------------------------|------------------------------|
| BAMF-104        | 3,200w             | 1,600w             | 83.50              | 3" Dual 4Ω               | 272oz.       | 6.00"          | 0.75                         | 1.25                         |
| BAMF-102        | 3,200w             | 1,600w             | 83.80              | 3" Dual 2Ω               | 272oz.       | 6.00"          | 0.75                         | 1.25                         |
| BAMF-124        | 3,500w             | 1,750w             | 84.60              | 3" Dual 4Ω               | 272oz.       | 6.75"          | 1.00                         | 2.00                         |
| BAMF-122        | 3,500w             | 1,750w             | 85.00              | 3" Dual 2Ω               | 272oz.       | 6.75"          | 1.00                         | 2.00                         |
| BAMF-154        | 3,800w             | 1,900w             | 86.40              | 3" Dual 4Ω               | 272oz.       | 8.00"          | 2.00                         | 4.00                         |
| BAMF-152        | 3,800w             | 1,900w             | 86.10              | 3" Dual 2Ω               | 272oz.       | 8.00"          | 2.00                         | 4.00                         |



# mofo SUBWOOFER Type S

MOFO Type S subwoofers are engineered to offer all the reliable performance qualities you expect of the original MOFO. Of course a new generation MOFO wouldn't be without including the proven benefits and characteristics of the original; aluminum alloy voice coil heatsink dust cap, 2.5" dual voice coil, dual damper suspension, high density reinforced paper cone, etc. Everything you expect from MOFO. What makes Type S MOFO different than the original? One of the two mods to Type S should be easy to spot. Type S uses formed steel framework, while the original uses a more expensive aluminum frame to support its overcompensating motor structure. The second mod to Type S is a motor structure that's been optimized for an efficient use of its magnetic strength. Strategically targeting all the motor structures power gives Type S MOFO the dynamic sound & performance qualities of its big brother, without the need of unnecessarily massive magnets. These improvements to MOFO Type S reduces material cost while maintaining the design & performance characteristics you want of the original.

NEW FOR  
2017



Overcompensating Motor Sturcture for Increased Magnetic Strength  
10 mm T-Yoke & Top Plate Improve Low Frequency Dynamics  
Vented T-Yoke & Frame Reduces Voice Coil Heat Build-up  
Die Cast Aluminum Heatsink Dust Cap Absorbs Voice Coil Heat  
Aluminum Dust Cap Fins Dissipate Heat & Strengthen Cone  
2.5" 4-Layer Voice Coil w/ Large Gauge Wire Increases Power  
High-Temperature Tollerance Adhesives Resist Thermal Failure

Nickel Plated 8ga Spring-Loaed Compression Wire Terminals  
Non-Transfer Spruce Pulp Cone w/ UV & Chemical Protection  
High Density Polyether Foam Surround w/ UV & Chemical Protection  
Dual Poly-Cotton Suspension Dampen Violent Accelerations  
Stitched Voice Coil Leads Prevent Potential Damage  
1-pc Gasket/Trim Ring w/ Concealed Mounting Holes Included

| Gothic     | Max Power | RMS Power | Efficiency | Voice Coil    | Motor  | Mounting | Optimum Sealed | Optimum Ported |
|------------|-----------|-----------|------------|---------------|--------|----------|----------------|----------------|
| Subwoofers | Handling  | Handling  | (1w/1m)    | Configuration | Volume | Depth    | Enclosure ft³  | Enclosure ft³  |
| MOFOS-10D4 | 2,200     | 1,100     | 82.60      | 2.50" Dual 4Ω | 204oz. | 6.00"    | 0.75           | 1.75           |
| MOFOS-10D2 | 2,200     | 1,100     | 83.00      | 2.50" Dual 2Ω | 204oz. | 6.00"    | 0.75           | 1.75           |
| MOFOS-12D4 | 2,500     | 1,200     | 86.50      | 2.50" Dual 4Ω | 254oz. | 6.50"    | 1.25           | 2.50           |
| MOFOS-12D2 | 2,500     | 1,200     | 86.40      | 2.50" Dual 2Ω | 254oz. | 7.50"    | 1.25           | 2.50           |

# GOTHIC SUBWOOFER

Overcompensating Motor Sturcture for Increased Magnetic Strength  
10mm T-Yoke & Top Plate Improve Low Frequency Dynamics  
Vented T-Yoke & Frame Reduces Voice Coil Heat Build-up  
2.50" 4-Layer Voice Coil w/ Nickel Plated 8ga Spring-Loaded Terminals  
High-Temperature Tollerance Adhesives Resist Thermal Failure  
Composite Spruce Pulp Cone w/ Twisted Woven Flax Fiber  
Sitched and Glued Surround/Cone Joints for Strongest Bonding  
Extended Excursion NBR Rubber Surround w/ UV Protection  
Poly-Cotton Suspension Dampen Violent Accelerations  
Stitched Voice Coil Leads Prevent Potential Damage  
1-pc Gasket/Trim Ring w/ Concealed Mounting Holes Included



| Gothic     | Max Power | RMS Power | Efficiency | Voice Coil    | Motor  | Mounting | Optimum Sealed | Optimum Ported |
|------------|-----------|-----------|------------|---------------|--------|----------|----------------|----------------|
| Subwoofers | Handling  | Handling  | (1w/1m)    | Configuration | Volume | Depth    | Enclosure ft³  | Enclosure ft³  |
| GW3-10     | 2,200     | 1,000     | 81.30      | 2.50" Dual 2Ω | 204oz. | 6.00"    | 1.00           | 1.50           |
| GW3-12     | 2,500     | 1,200     | 83.60      | 2.50" Dual 2Ω | 254oz. | 6.50"    | 1.50           | 2.25           |
| GW3-15     | 3,000     | 1,400     | 84.00      | 2.50" Dual 2Ω | 254oz. | 7.50"    | 2.75           | 3.25           |



# EDGE SHALLOW SUBWOOFER

NEW FOR  
2017

| EDGE Shallow | Max Power | RMS Power | Efficiency | Voice Coil    | Motor  | Mounting | Optimum Sealed | Optimum Ported |
|--------------|-----------|-----------|------------|---------------|--------|----------|----------------|----------------|
| Subwoofers   | Handling  | Handling  | (1w/1m)    | Configuration | Volume | Depth    | Enclosure ft³  | Enclosure ft³  |
| EW-104S      | 1,400     | 700       | 81.30      | 2.00" 4Ω      | 60oz.  | 2.50"    | 0.75           | -              |
| EW-124S      | 1,200     | 600       | 83.60      | 2.00" 4Ω      | 60oz.  | 2.50"    | 1.00           | -              |



# THIN SUBWOOFER ENCLOSURE

THIN-120BXA Powered Enclosure

Pre-loaded Enclosure w/ 12" Subwoofer  
4 Ohm Impedance  
650W Built in Amp  
Carpeted Black w/ Embroidered Accents  
29.75"l x 14.5" h x 5.75"/2.25"d





## EF-60C

6.5" Component System

500w Max Power Handling  
Improved Efficiency Diaphragm & Magnet Structure  
Carbon Fiber Injection Molded Polypropylene Cone  
Treated Woven Cloth Surround  
1" Voice Coil on Aluminum Former  
4-ohm System Impedance  
Quick Disconnect Terminals  
1" Flush Mount Dome Tweeter  
Passive Crossover Included  
Speaker Grill Included  
Freq-Response: 70-20kHz  
Sensitivity: 93dB  
Mounting Depth: 2.5"



EF-694

EF-653

EF-52

EF-42

EF-573

Improved Efficiency Diaphragm & Magnet Structure  
Carbon Fiber Injection Molded Polypropylene Cone  
Treated Woven Cloth Surround  
1" Voice Coil on Aluminum Former  
4-ohm System Impedance  
Quick Disconnect Terminals  
2" Balanced Dome Mylar Midrange (EF-694)  
1" Balanced Dome Mylar Tweeter  
1/2" Dome Super Tweeter (select models)

| Edge Speakers | Size & Type    | MAX Power | Frequency Response | Efficiency (1w/1m dB) | Mounting Depth |
|---------------|----------------|-----------|--------------------|-----------------------|----------------|
| EF-60C        | 6.5" Component | 500w      | 65-20kHz           | 92dB                  | 1.75"          |
| EF-694        | 6"x9" 4-way    | 800w      | 45-20kHz           | 93dB                  | 3.25"          |
| EF-573        | 5" x 7" 3-way  | 500w      | 65-20kHz           | 92dB                  | 1.75"          |
| EF-653        | 6.5" 3-way     | 400w      | 65-20kHz           | 92dB                  | 1.75"          |
| EF-52         | 5.25" 2-way    | 300w      | 80-20kHz           | 90dB                  | 2.125"         |
| EF-42         | 4" 2-way       | 250w      | 100-20kHz          | 90dB                  | 1.75"          |

## NB-1 2-Way Mount Tweeter 200 Watts

Niobium Rare Earth Ferroelectric Transducer Magnet  
Polypropylene Diaphragm  
100 Watts R.M.S.  
Freq. Resp. 5kHz to 25KHz  
Imp. 4 Ohm  
Surface/Angle Mount  
SPL 97 dB  
Built in Crossover



## NB-2 3-Way Mount Tweeter 200 Watts

Niobium Rare Earth Ferroelectric Transducer Magnet  
Polypropylene Diaphragm  
100 Watts R.M.S.  
Freq. Resp. 5kHz to 25KHz  
Imp. 4 Ohm  
Surface/Angle Mount/Flush Mount  
SPL 97 dB  
Built in Crossover



## NB-4 4-Way Mount Tweeter 250 Watts

Niobium Rare Earth Ferroelectric Transducer Magnet  
Swivel/Surface/Angle Mount/Flush Mount  
Polypropylene Diaphragm  
Built in Crossover  
Freq. Resp. 5kHz to 25KHz  
Imp. 4 Ohm  
SPL 97 dB





## NX-5 Bullet Tweeter 200 Watts MAX

1" Horn Loaded Bullet tweeter  
Machined Aluminum Chassis  
Titanium Dome Diaphragm  
1" High Temperature Voice Coil  
Acrylic Phase Plug

High Strength Neodymium Magnet  
Freq. Resp 3kHz-20kHz  
Impedance: 3 ohm  
Efficiency: 109dB  
Sold in pairs



## XPS-104 4" Midrange

300 watts max  
.75" Voice Coil  
Freq. Resp. 450 Hz. to 10kHz.  
15 oz. Magnet  
Imp. 4 Ohm  
SPL 92 dB  
Mounting Depth: 1.75"  
Sold Individually



# PROFESSIONAL AUDIO

## Midrange Speakers



MID-80



MID-65

| Pro Audio<br>Mid-Range | Size &<br>Type | MAX<br>Power | Impedance | Frequency<br>Response | Efficiency<br>(1w/1m dB) | Mounting<br>Depth |
|------------------------|----------------|--------------|-----------|-----------------------|--------------------------|-------------------|
| MID-65                 | 6.5"           | 300w         | 4Ω        | 150-15kHz             | 96dB                     | 2.75"             |
| MID-80                 | 8"             | 350w         | 4Ω        | 1202-8kHz             | 98dB                     | 3.25"             |

## Amplifier Wire Kits

- AK-0** 0g Amplifier Wire Kit w/ 200A ANL Fuse
- AK-4** 4ga Amplifier Wire Kit w/ 120A MANL Fuse
- AK-8** 8ga Amplifier Wire Kit w/ 80A MANL Fuse

### Each Wire Kit Includes:

17ft Power Wire w/ Ring Terminal  
3ft Ground Wire w/ Ring Terminal  
17ft Twisted Pair RCA Interconnect  
17ft Remote Turn-on Wire  
25ft 16g Split Speaker Wire  
Full Size MANL Fuse Holder  
ANL or MANL Fuse Included  
Assorted Installation Accessories



# CAPACITORS


## PC1.5F 1.5 Farad Power Capacitor

Terminal Post for Ring Terminal  
Digital Voltage Meter  
Translucent Mounting Brackets  
Brushed Aluminum Finish



## PC2.0F 2 Farad Power Capacitor

12-16 DC Volts Operation  
Terminal Post for Ring Terminal  
Digital Voltage Meter  
Translucent Mounting Brackets  
Chrome Plated Finish

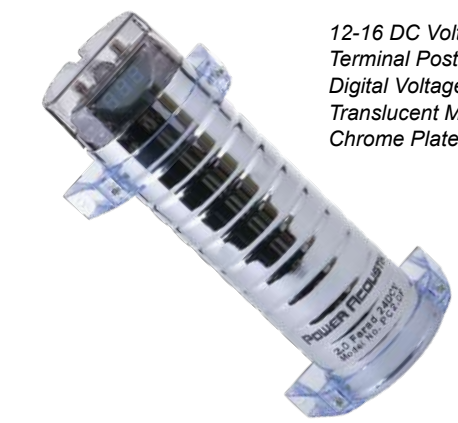

## PCX-3F 3 Farad Power Capacitor

## PCX-5F 5 Farad Power Capacitor

12-16 DC Volts Operation  
Terminal Post for Ring Terminal  
Digital Voltage Meter  
Polarity & Voltage Protection  
Protection Alert Indicator  
LED Accent Lighting  
Satin Finish w/ Chrome Accents



## PCX-30F 30 Farad Hybrid Power Capacitor

12-16 DC Volts Operation  
Internally Stacked Carbon-Foil Capacitors  
Direct Connect 0 ga. Terminals & 4 ga. Reducers  
Digital Voltage Meter  
Polarity & Voltage Protection  
Protection Alert Indicator  
LED Accent Lighting  
Satin Finish w/ Chrome Accents





# EQUALIZERS

## PWM-70 7-Band 1/2 DIN Equalizer

- 2 Selectable Balanced Inputs
- Selectable Input Sensitivity
- 7 bands +/- 18dB Parametric Equalizer
- Independent Volume & Fader Control
- Independent Subwoofer Output and Level Control
- Selectable Subwoofer Low-Pass Crossover
- 8V MAX Front, Rear, & Subwoofer Outputs
- Low Noise BI-FET Op-Amp for Minimum Distortion
- 20dB Headroom, 30V Bipolar Power Supply
- Blue LED Backlighting
- S/N Ratio 110dB @1V
- THD:0.05%



## PWM-20 4-Band 1/2 DIN Equalizer

- 2 Selectable Balanced Inputs
- Variable Stereo Input Sensitivity
- 4 Variable Frequency Bands +/- 18dB Parametric Equalizer
- Independent Volume & Fader Control
- Independent Subwoofer Output and Level Control
- Variable Subwoofer Low-Pass Crossover
- 8V MAX Front, Rear, & Subwoofer Outputs
- Low Noise BI-FET Op-Amp for Minimum Distortion
- 20dB Headroom, 30V Bipolar Power Supply
- Blue LED Backlighting
- Quick Disconnect Wire Harness
- S/N Ratio 115dB @1V
- THD:0.05%



## PWM-19 4-Band 1/2 DIN Equalizer

- 2 Selectable Balanced Inputs
- Variable Stereo Input Sensitivity
- 4 bands +/- 18dB Parametric Equalizer
- Independent Volume & Fader Control
- Independent Subwoofer Output and Level Control
- Variable Subwoofer Low-Pass Crossover
- 7V MAX Front, Rear, & Subwoofer Outputs
- Low Noise BI-FET Op-Amp for Minimum Distortion
- 20dB Headroom, 30V Bipolar Power Supply
- Selectable Green/Amber Illumination
- Quick Disconnect Wire Harness
- Under Dash Mounting Hardware Included
- S/N Ratio 110dB @5V
- THD:0.05%



## PWM-16 4-Band 1/2 DIN Equalizer

- 2 Selectable Balanced Inputs & Front Panel AUX Input
- 4 bands +/- 18dB Parametric Equalizer
- Independent Volume & Fader Control
- Independent Subwoofer Output and Level Control
- Variable Subwoofer Low-Pass Crossover
- 7V MAX Front, Rear, & Subwoofer Outputs
- Blue LED Backlighting
- Quick Disconnect Wire Harness
- S/N Ratio 80dB @5V
- THD:0.05%



# BASSPROCESSOR

## BASS-15C Bass Maximizer

- PWM High Head Room Power Supply
- 27-63Hz Parametric Bass Boost
- Variable Bandwidth Adjustment
- Max Output Level: 13.5 volt
- Dash Mount Remote Control
- LED MAX Bass Indicators
- Selectable Subsonic Filter
- Balanced RCA Inputs
- Selectable Input Ground Sources
- Selectable Grounding Isolation
- Frequency Response: 10~100kHz
- THD: 0.003%
- S/N Ratio: 130dB
- Input Noise Rejection: 60 dB

NEW FOR  
2017



## BASS-12C Bass Maximizer

- Chrome Finish w/ Illuminated Badge
- PWM High Head Room Power Supply
- 27-63Hz Parametric Bass Boost
- Variable Bandwidth Adjustment
- Max Output Level: 13.5 volt
- Dash Mount Remote Control
- LED MAX Bass Indicators
- 35-80Hz Variable Subsonic Filter
- Balanced RCA Inputs
- Selectable Input Ground Sources
- Selectable Grounding Isolation
- Frequency Response: 10~100kHz
- THD: 0.003%
- S/N Ratio: 130dB



## BASS-10C Bass Maximizer

- PWM High Head Room Power Supply
- 27-63Hz Parametric Bass Boost
- Variable Bandwidth Adjustment
- Max Output Level: 13.5 volt
- Dash Mount Remote Control
- LED MAX Bass Indicators
- Selectable Subsonic Filter
- Balanced RCA Inputs
- Selectable Input Ground Sources
- Selectable Grounding Isolation
- Frequency Response: 10~100kHz
- THD: 0.003%
- S/N Ratio: 130dB
- Input Noise Rejection: 60 dB



## C-30XR 3-Way 12dB Electronic Crossover

- 6-Channel Low-Level Input
- 6-Channel Low-Level Output w/ 5V Gain
- 2/4 Channel Input Selection
- Independent Front/Rear High Pass
- Independent Subwoofer Low Pass
- Stereo or Mono Subwoofer Output Selection
- 180° Phase Switch
- Variable Frequency & Gain Bass Boost
- Dash Mount Remote Subwoofer Gain Module
- S/N Ratio: 95dB
- Channel Separation: 60dB





# MARINE AUDIO

## MCD-51B (w/ Bluetooth V2.0) 1-DIN Marine CD Player w/32GB USB Playback



CD/MP3, AM/FM & USB Receiver  
Conformal Coated PCB and Faceplate  
Theft Deterrent Detachable Faceplate  
Bluetooth V2.0 Hands Free Calling from Smart Phone  
A2DP MP3 Audio Playback from Enabled Device  
Playback from 32GB USB of MP3 & WMA  
Playback from CD, CDR, CDRW of MP3 & WMA  
Aux Audio Input for Personal Media Devices  
Front & Rear Pre-Amp Output  
52w x 4 MOSFET Speaker Outputs  
Custom & Pre-Set Equalizer Settings  
Audio Staging Controls  
12/24 Hour Digital Clock  
Remote Control Included  
Faceplate Carry Case Included



## RAZOR MARINE AMPLIFIERS

Compact 4.75" Chassis Design for Installation Versatility  
Splash Resistant Conformal Coated Circuit Boards  
MOSFET Power Supply w/ Audiophile Grade IR™ Transistors  
Military Grade SMT PCB Maintains Dynamic Performance  
2-ohm Stereo & 4-ohm Bridged Full Range Operation  
2-Ohm Stable Class A/B Monoblock Operation  
1-ohm Stable Class D Monoblock Operation  
Direct Short, Thermal, & Overload Circuits Protect Amplifier  
200mv-6V Low Level RCA Inputs  
High Level Input w/ Signal Sense Auto Turn-on  
Variable 12dB High Pass & Low Pass Crossovers  
10-50Hz Variable 12dB Subsonic Crossover Protects Subwoofers  
12dB Bass Boost Increases Low Octave Harmonics (monoblocks)  
Dash Mount Gain Control Module Included (select models)



| RAZOR     | Max Power | RMS Power         | RMS Power         | RMS Power         | Dimensions           | Gain Control |
|-----------|-----------|-------------------|-------------------|-------------------|----------------------|--------------|
| CLASS D   | (watts)   | 4Ω Bridged, 14.4V | 2Ω, 14.4V         | 4Ω, 14.4V         | (4.75" w x 1.625" h) | Included     |
| MA4-3000D | 3,000     | 2 x 750           | 4 x 375           | 4 x 285           | 12.25"               | -            |
| MA5-2500D | 2,500     | 300 x 2 + 600 x 1 | 150 x 4 + 600 x 1 | 100 x 4 + 400 x 1 | 12.25"               | Included     |
| MA1-2300D | 2,300     | -                 | 1 x 1,400         | 1 x 900           | 11"                  | Included     |
| MA1-3500D | 3,500     | 1 x 2,100         | 1 x 1,400         | 1 x 900           | 12.25"               | Included     |

## ATV-6 All-Terrain Vehicle Audio System



Rugged All Element Ready ABS Construction  
400w MAX Power Class A/B Audio Amplifier  
Conformal Coated PCB and Waterproof Connections  
Handlebar Mount Remote Control w/ AUX Input Included  
Marine Grade Waterproof 6.5" Coaxial Speaker  
1" Extended Frequency Range Titanium Dome Tweeter  
RGB LED Light Rings Built-in, Remote Control Included  
Bluetooth V3.0 MP3 Audio Streaming from Mobile Phone  
3.5mm Aux Audio Input for Personal Media Devices  
Heavy Duty Mounting Hardware Included



# MARINE AUDIO



100% Waterproof Enclosure and Speaker System  
High Density ABS Construction w/ UV Coating  
Steel reinforced Mounting Bracket fits most towers  
Braided Stainless Steel Safety Cable Included  
Stainless Steel Mounting Hardware Included  
Polypropylene speaker cone and Titanium Tweeter  
Quick Disconnect Compression Terminals  
Meets ROHS and CE Certifications  
4-ohm System Impedance

| Wake Tower Speakers | Size & Color  | MAX Power | RMS Power | Frequency Response | Efficiency (1w/1m dB) | Overall Size (HxWxL) |
|---------------------|---------------|-----------|-----------|--------------------|-----------------------|----------------------|
| MWT-65W             | 6.5" White    | 500w      | 250w      | 40-20kHz           | 90dB                  | 8.5" x 8.5" x 9"     |
| MWT-65T             | 6.5" Titanium | 500w      | 250w      | 40-20kHz           | 90dB                  | 8.5" x 8.5" x 9"     |
| MWT-80W             | 8" White      | 750w      | 375w      | 30-20kHz           | 91dB                  | 10" x 10" x 9.5"     |
| MWT-80T             | 8" Titanium   | 750w      | 375w      | 30-20kHz           | 91dB                  | 10" x 10" x 9.5"     |



## MARINE WATERPROOF SPEAKERS

| Marine Speakers | MAX Power | RMS Power | Frequency Response | Efficiency (1w/1m dB) | Overall Size (WxHxL) |
|-----------------|-----------|-----------|--------------------|-----------------------|----------------------|
| MF-65WT         | 300w      | 150w      | 60-20kHz           | 91dB                  | 7.5" x 7.5" x 2.5"   |

Marine Grade Waterproof 6.5" Coaxial Speaker  
High Density ABS Construction w/ UV Coating  
100% Waterproof Sealed Back Speaker Frame  
Stainless Steel Mounting Hardware Included  
Injection Molded Polypropylene speaker cone  
Rubber Surround & Tweeter Pole Gasket  
1" Titanium Dome Tweeter  
White and Titanium Grills Included  
Quick Disconnect Terminals  
Meets ROHS and CE Certifications  
4-ohm System Impedance

## MARINE WATERPROOF SUBWOOFER

| Marine Subwoofer | MAX Power | RMS Power | Frequency Response | Efficiency (1w/1m dB) | Overall Size (WxHxL) |
|------------------|-----------|-----------|--------------------|-----------------------|----------------------|
| MW-10WT          | 600w      | 300w      | 30-4kHz            | 91dB                  | 10.5" x 10.5" x 6"   |

Marine Grade Waterproof 10" Subwoofer  
High Density ABS Construction w/ UV Coating  
100% Waterproof Sealed Back Speaker Frame  
Stainless Steel Mounting Hardware Included  
IMPP Polypropylene Cone & Rubber Surround  
White and Titanium Grills Included  
Quick Disconnect Terminals  
Meets ROHS and CE Certifications  
4-ohm System Impedance



# LED HIGH PERFORMANCE HEADLIGHTS

WWW.FARENHEITUSA.COM  
**Fahrenheit**

OPTIMUM



OPT-H1



OPT-H3



OPT-H4



OPT-H7



OPT-H8 / OPT-H9  
OPT-H11



OPT-H13



OPT-880



OPT-9005 / OPT-9006



OPT-9004 / OPT-9007

360° rotational adjustment & length regulator to focus light beam for optimal light dissipation

4,000K color temperature simulates brilliant white daytime sunlight characteristics

Active COB LED matrix engineered using industry-leading optical illumination analysis software

Superconductive ceramic circuit panel and magnesium alloy chassis resist heat build-up

Built-in Can-Bus/ECM control interfaces automatically program to any vehicle configuration

OEM standard electrical connectors & chassis bracket configurations ensure exact vehicle fitment

3,000 lumen emitting diode capable of generating up to 3X the light of typical halogen headlamp.

5,000hr/3-5 years expected lifetime, surpassing 2-3 year lifespan of typical halogen headlamp



# LED SELECT SERIES HEADLIGHTS

# XENON HEADLIGHTS

[WWW.FARENHEITUSA.COM](http://WWW.FARENHEITUSA.COM)  
**Fahrenheit**



H1-12V 100W



SEL-H1



SEL-H3



SEL-H4



H3-12V 100W



H4-12V 100W



H7-12V 100W



H8-12V 35W



SEL-H7



SEL-H8 / SEL-H9  
SEL-H11



SEL-H13



H9-12V 65W



H11-12V 55W



9004  
12V 100/80W



9005  
12V 100W



SEL-880



SEL-9005 / SEL-9006



SEL-9004 / SEL-9007



9006  
12V 80W



9007  
12V 100/80W



H13 / 9008  
12V 65/55W



880  
12V 27W

THE BEST



# POWER ACOUSTIK®



[www.PowerAcoustik.com](http://www.PowerAcoustik.com)

## 2C17

©2016 POWER ACOUSTIK ELECTRONICS  
MONTEBELLO, CALIFORNIA, U.S.A. ALL RIGHTS RESERVED  
SPECIFICATIONS AND DESIGNS ARE SUBJECT TO CHANGE WITHOUT NOTICE.  
PRINTED IN U.S.A