

Installation Manual




Notes

- This fitting requires 220-240V AC/50Hz power input to the driver. Installation should be done by qualified electrician.
- Electrical Wiring and installation should always comply as per the local standards.
- Do not open or interchange any parts of this fitting or the warranty is void.
- The fitting may be hot to touch after continuous use.
- Do not install the fitting near heat source.
- Do not install any inductive loads such as exhaust fans or pond pumps etc. within the same lighting circuit of this fitting. Issues caused by such wirings are not covered under our warranty policy.
- Wherever applicable - waterproof cable joints like junction boxes or heavy walled adhesive lined heat shrinks must be used, or warranty is void.
- If you have any questions about the installation of this product, please contact Mondolux at 1300 601 931.

Care & Refinishing

Mondolux strongly recommends following cleaning procedures to maintain proper finish of the product.

- Do not use bleach or concentrated solvents under any circumstances.
- For Black finish: Wipe gently with a soft damp cloth or chamois. Do not use any abrasive compounds.

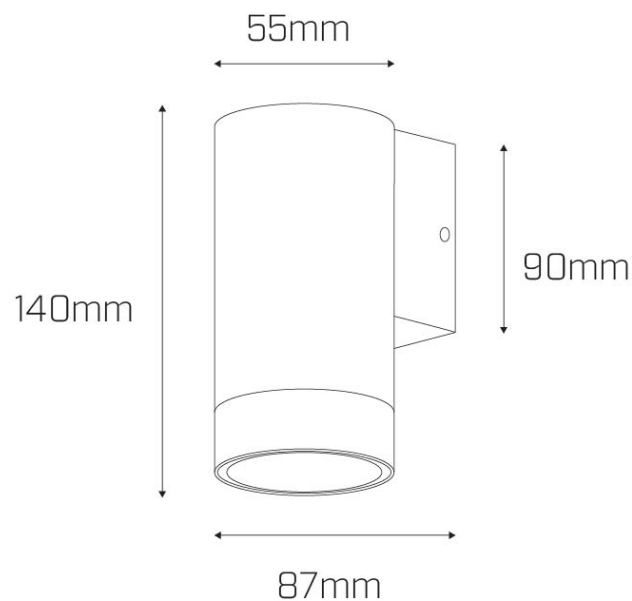

Installation Steps

1. Ensure the mains power is turned off.
2. Drill required number of holes into the wall. See picture 1.
3. Fix the mounting base using the provided screws. Pass the power supply cable through the gasket of the mounting base and secure it. See picture 2.
4. Connect the wires on the supply side to the respective terminals of the Luminaire. See picture 3.
5. Use the grub screws and allen key provided to secure the main luminaire to the mounting base. See picture 4.
6. Installation is complete. Turn the mains on. See picture 5.

