

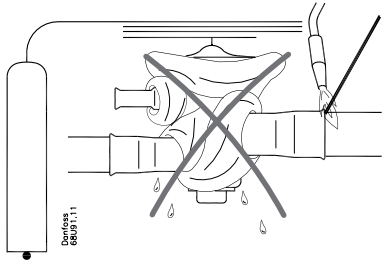
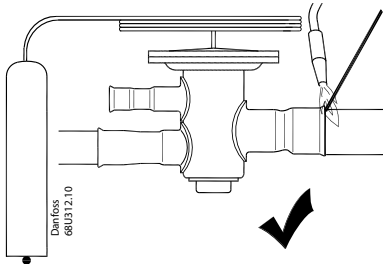
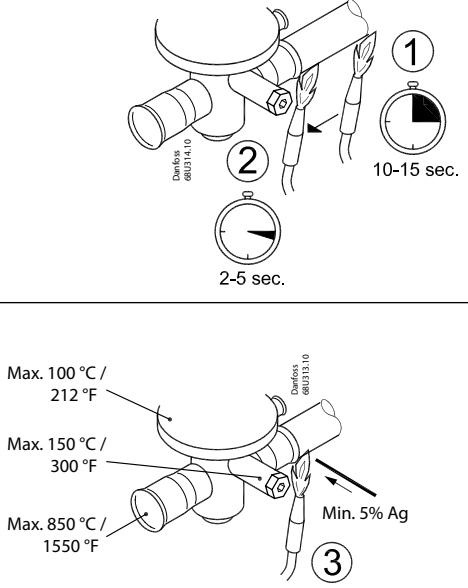
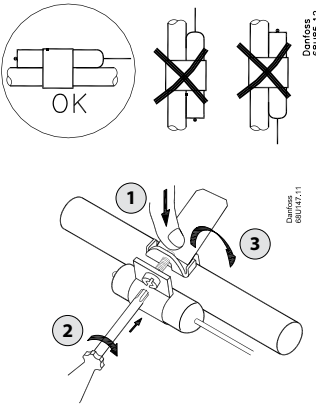
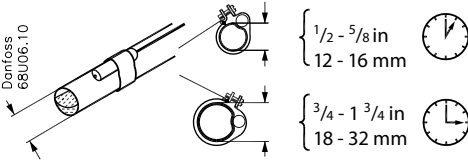
Installation guide



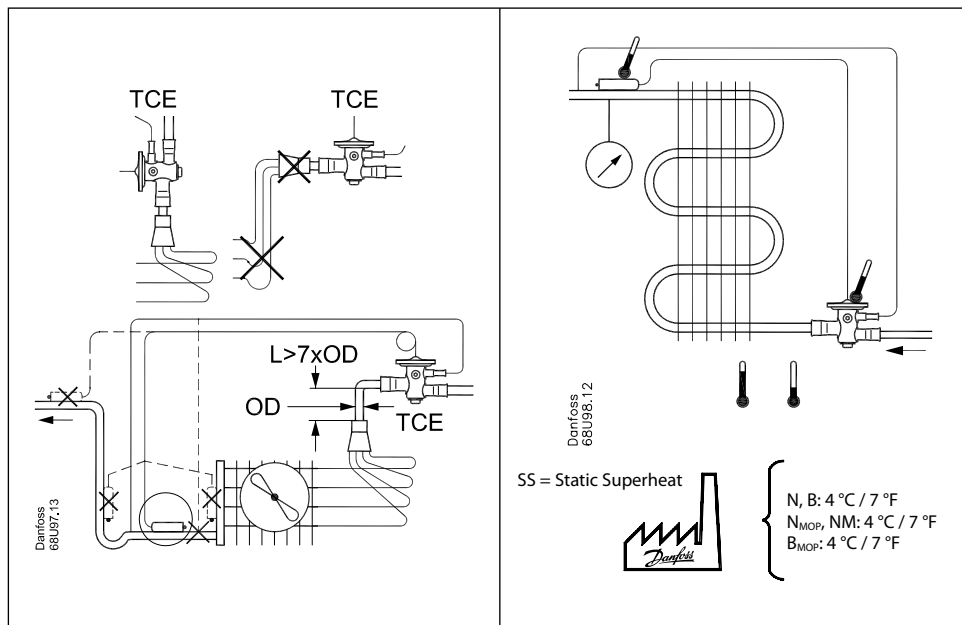
Thermostatic expansion valve

Type TCBE / TCCE / TCAE

068R9552

068R9552

Standard refrigerants: See product label	Max. working pressure: PS / MWP: 45.5 bar / 660 psig	Max. test pressure P _{test} = 45.5 bar / 660 psig
 Danfoss 68U911.1	 Danfoss 68U312.10	 Danfoss 68U314.10 1 10-15 sec. 2 2-5 sec. 3 Max. 100 °C / 212 °F Max. 150 °C / 300 °F Max. 850 °C / 1550 °F Min. 5% Ag
 Danfoss 68U05.12	 Danfoss 68U06.10 1 2 3 1/2 - 5/8 in 12 - 16 mm 3/4 - 1 3/4 in 18 - 32 mm	



R22/R407C	R134a	R404A/R507	R410A	ΔSS $1 \times \begin{matrix} \odot \\ \uparrow \\ \ominus \end{matrix}$
-	N	-	-	1 °C (1.8°F)
N	NM	N,B	N,B	1.5 °C (2.7°F)
NM,B	-	NM	NM	2 °C (3.6°F)

Temperature ranges:

N = -40 - 10 °C / -40 - 60 °F

NM = -40 - 5 °C / -40 - 25 °F

B = -60 - 25 °C / -75 - 15 °F