


Floor standing enclosures


Combinable one glazed door and swingframe

MOUNTING INSTRUCTIONS


7697-0318-02 REV. 0

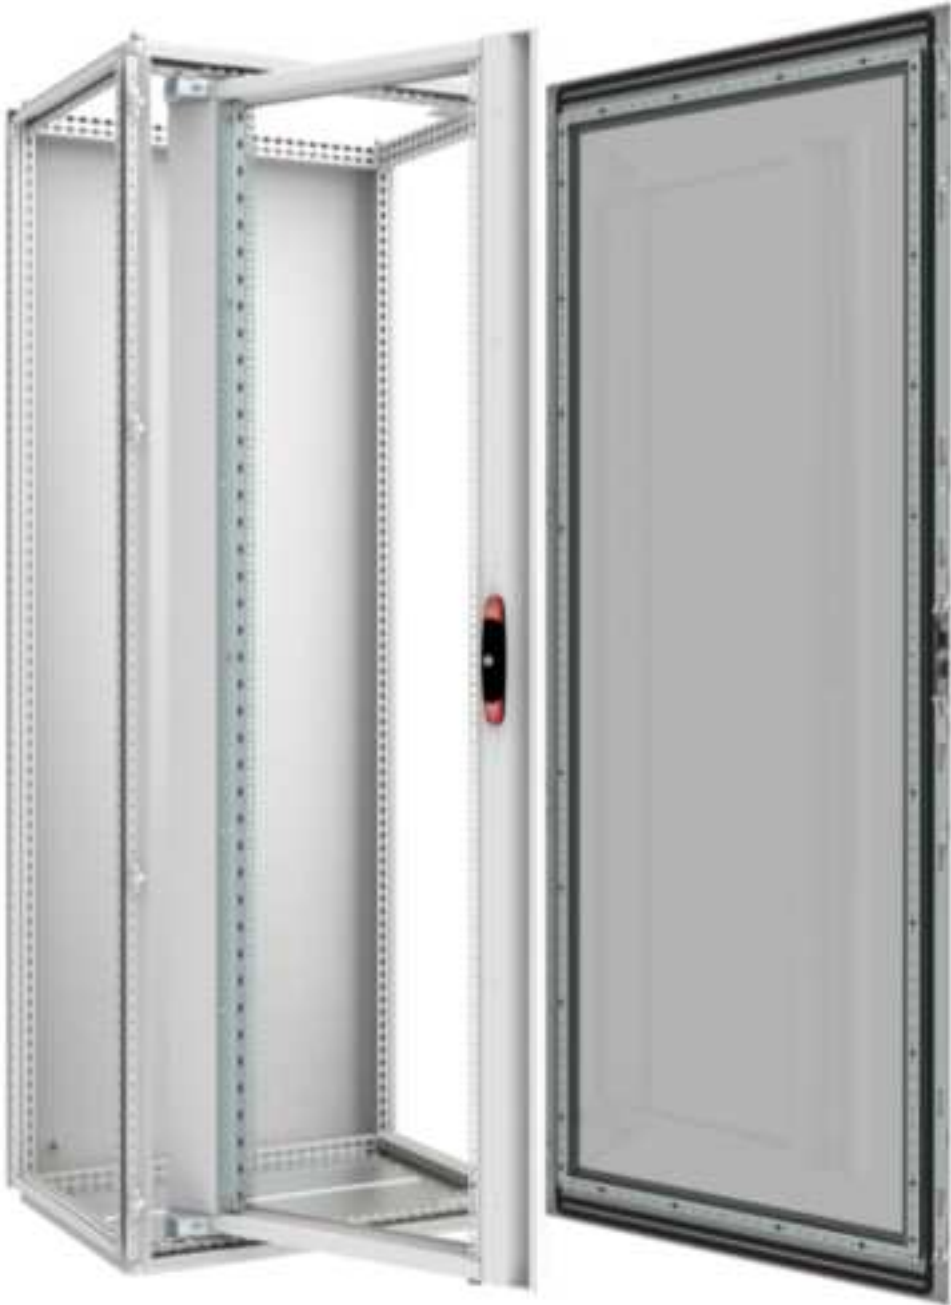

2

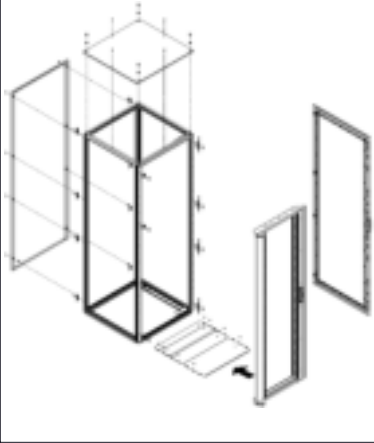


3

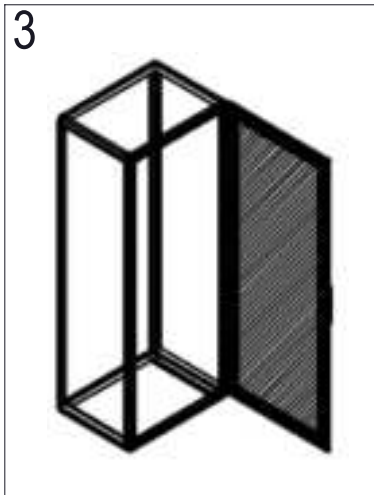


4



5

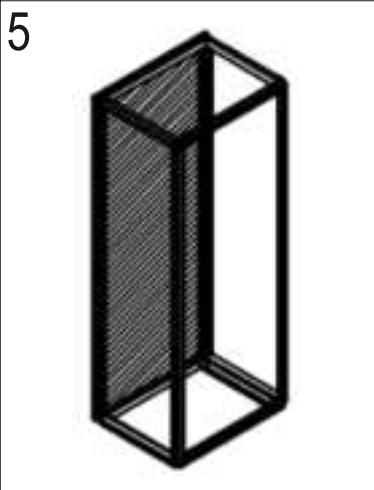

6/7

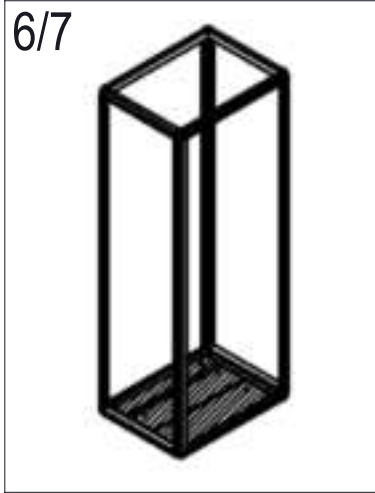

8/9




10




WARNING: When mounting on or over a combustible surface, a floor plate of at least 1.43 mm galvanized or 1.6 mm uncoated steel extended at least 150 mm beyond the equipment on all sides must be installed.




WARNING: In order to maintain the environmental integrity of the enclosure, devices with the same environmental ratings shall be used to close openings in customized enclosure.



MCS DGSFM

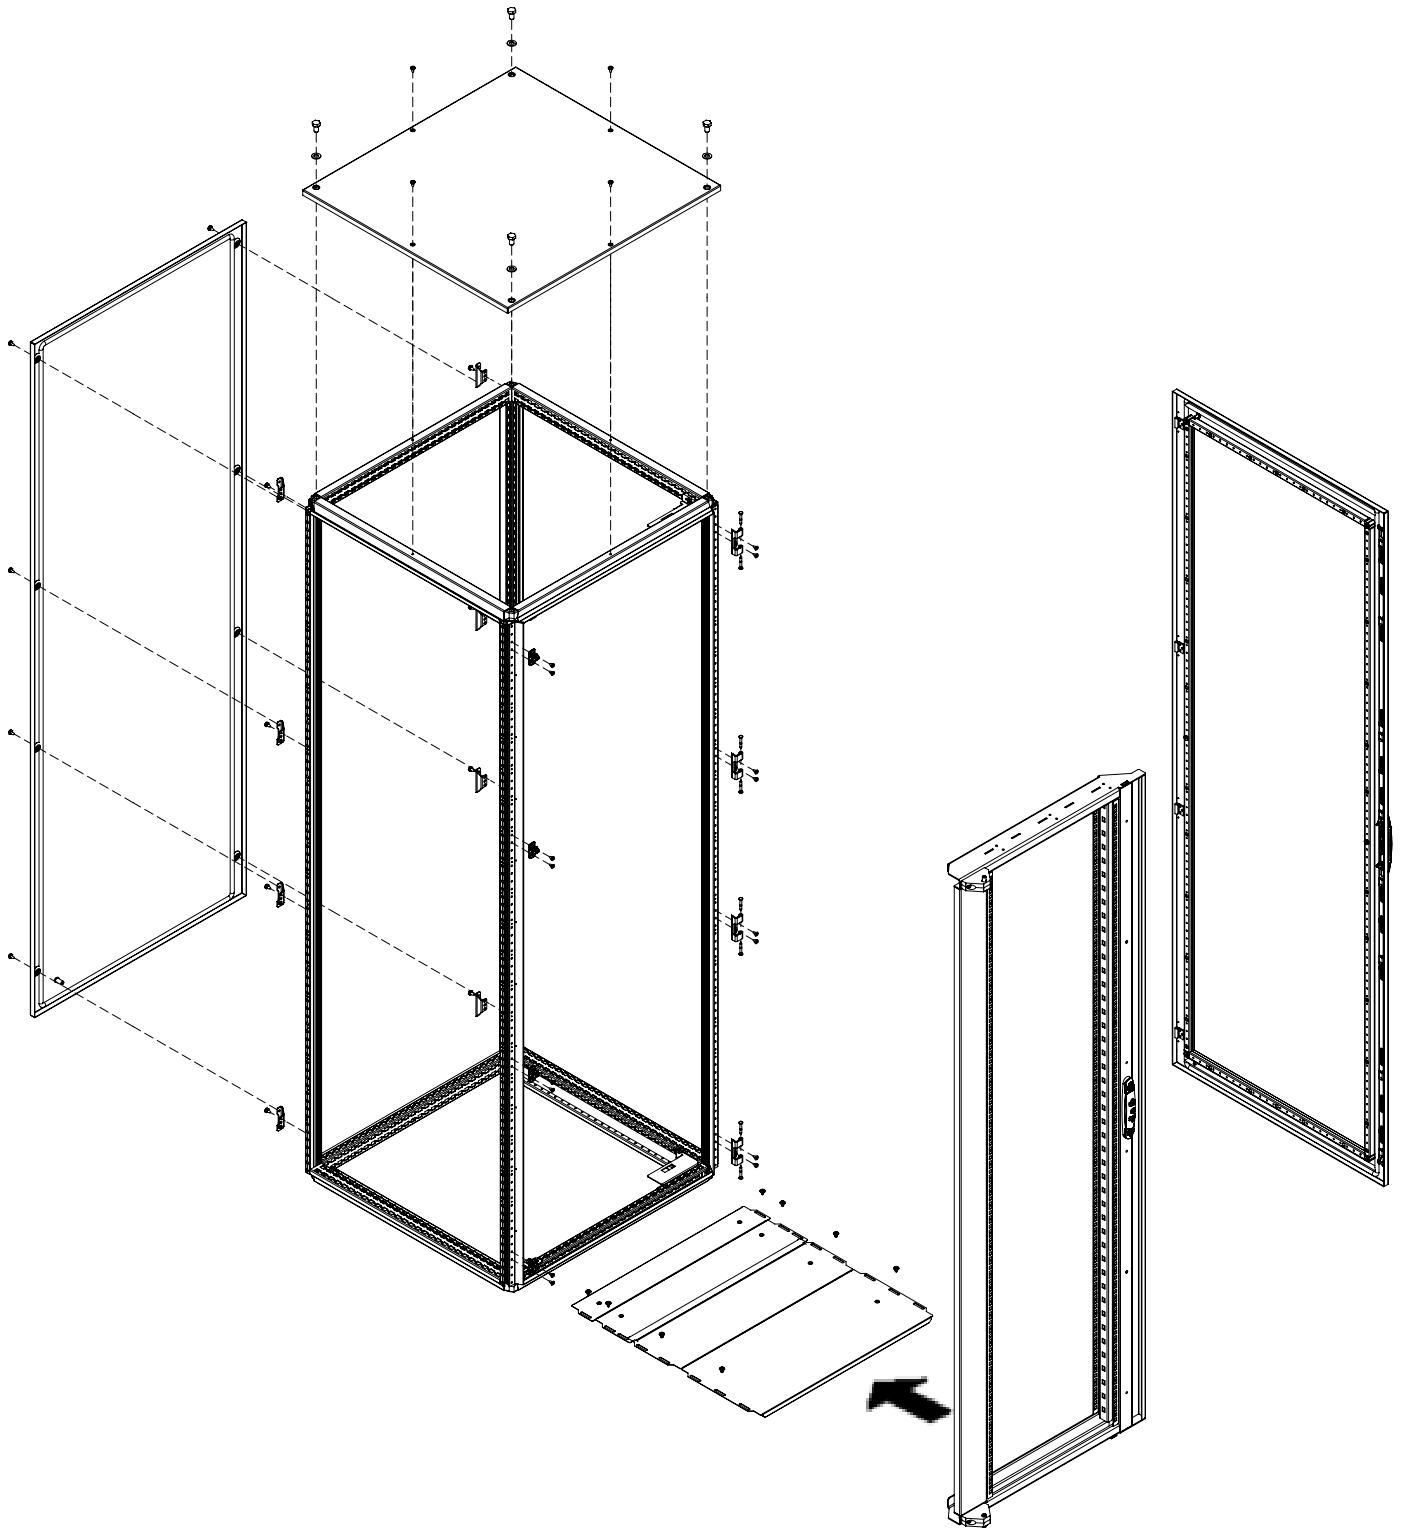




GLAZED DOOR


Ref.	Pic.	Qty.
A		4
B		4
C	 M6x12	16

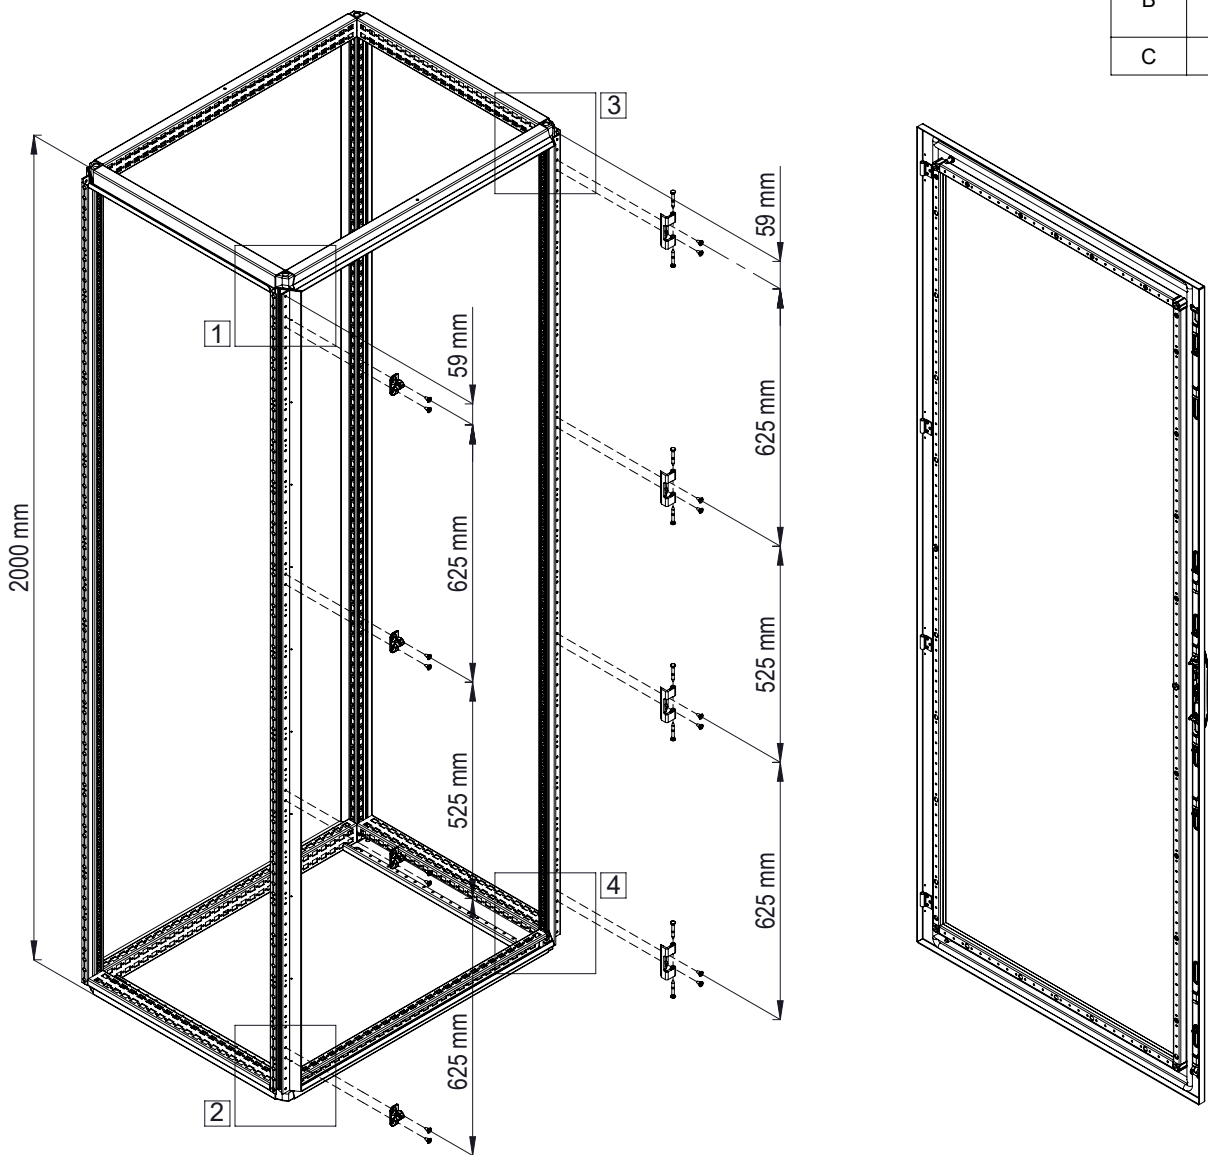


A C Torque 8-9 Nm



A C Torque 8-9 Nm



B C Torque 8-9 Nm




B C Torque 8-9 Nm



ROOF PLATE



Ref.	Pic.	Qty.	
		D=600	D=800
A	M12x20	4	4
B	M12	4	4
C	M6x12	2	4





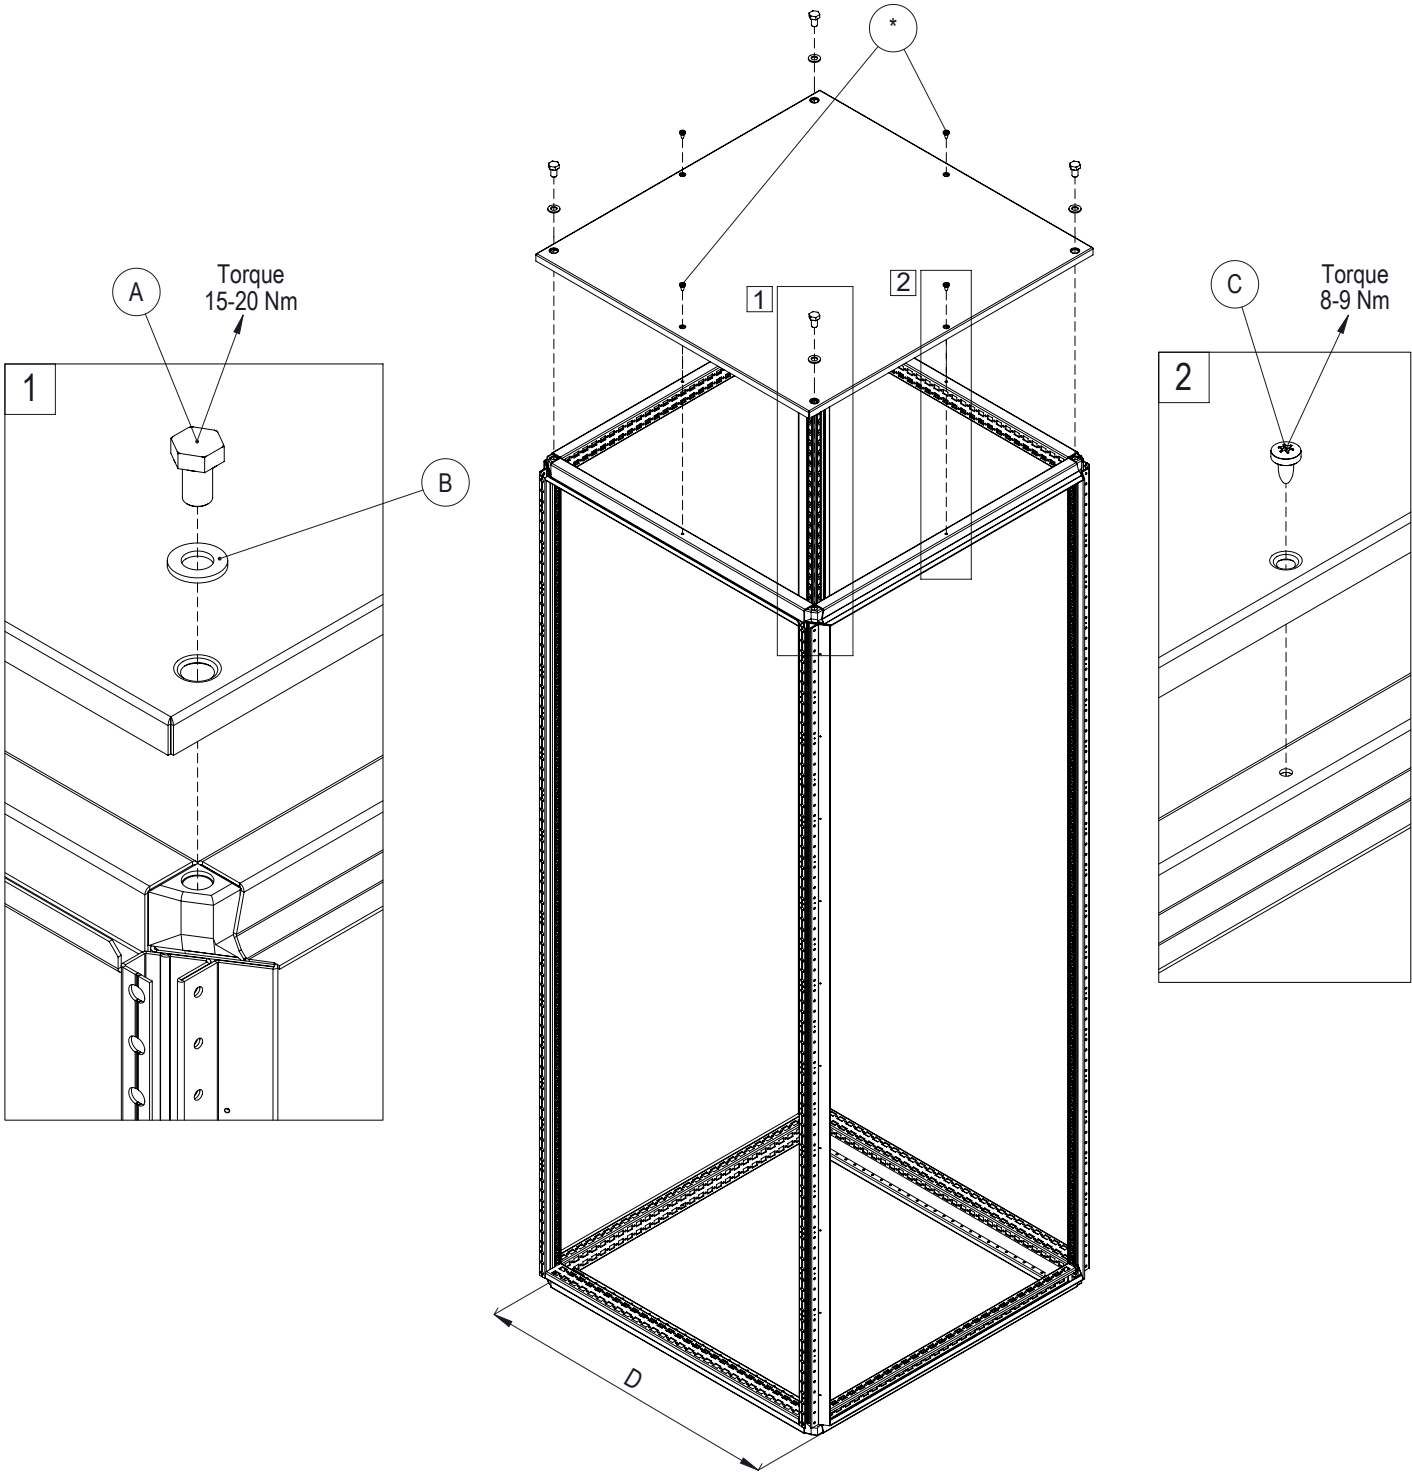


* - Used on enclosures 800 mm deep.
** - Torque value for first tightening. For following tightening, torque value recommended is 4-5 Nm.



BACK PANEL


Ref.	Pic.	Qty.
A		8
B	 M6x12	16

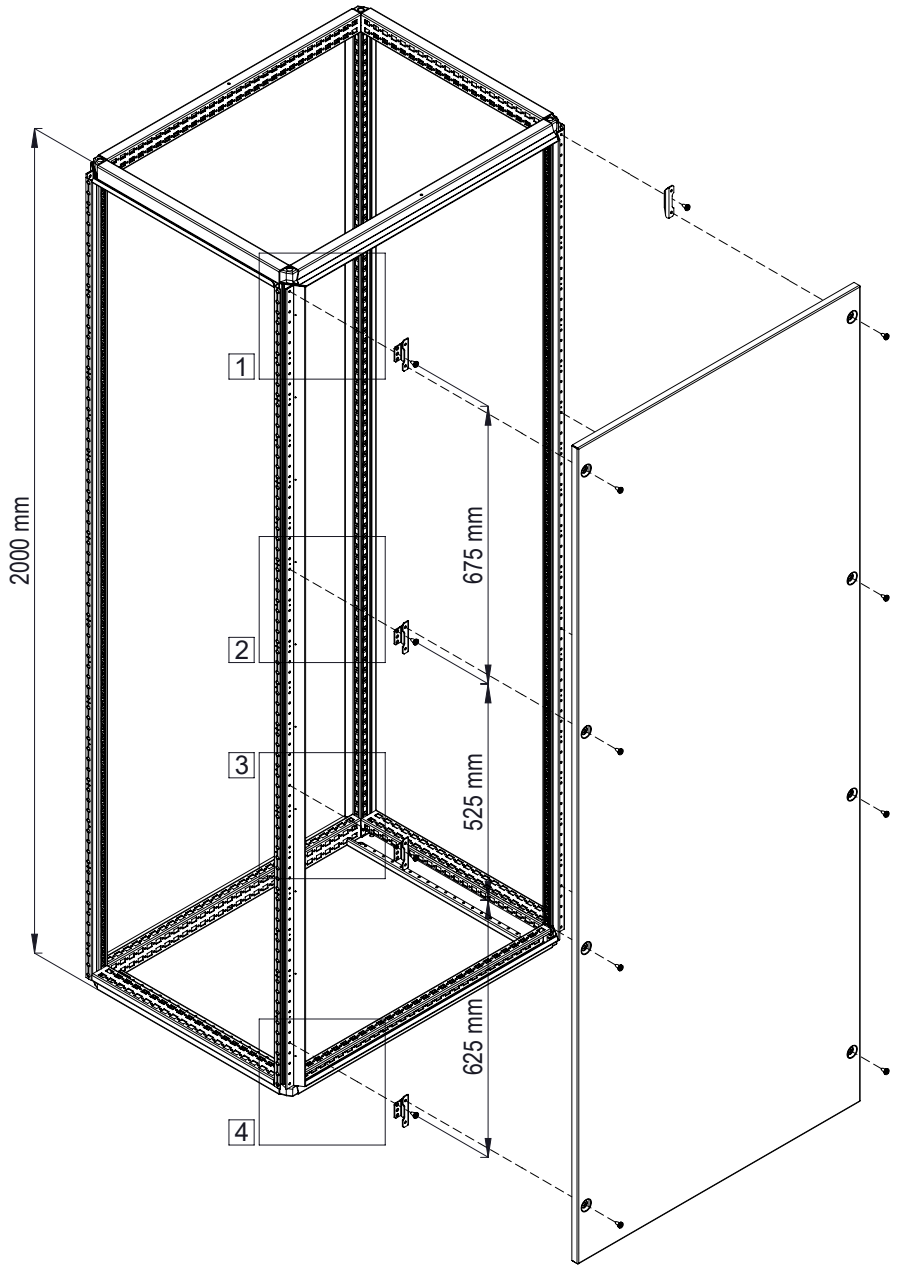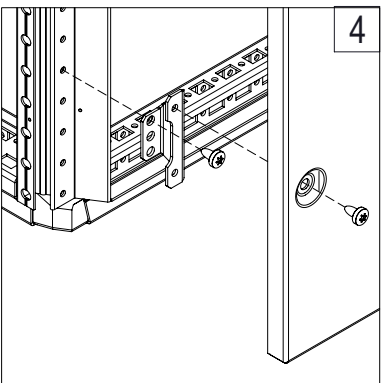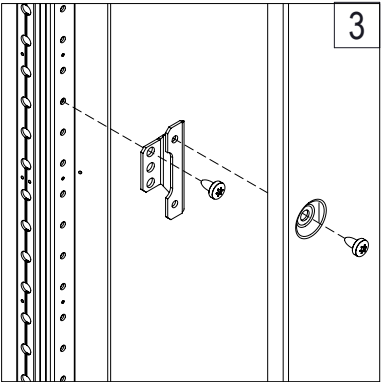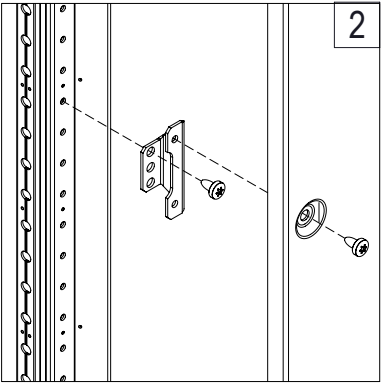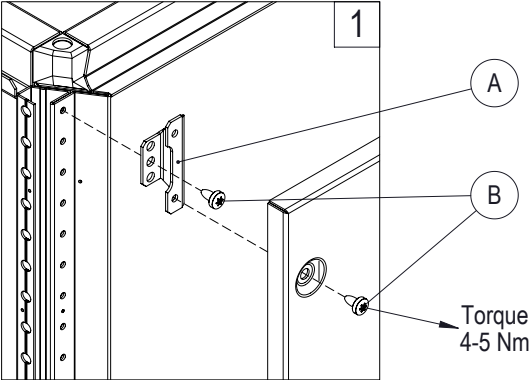






BOTTOM PLATES

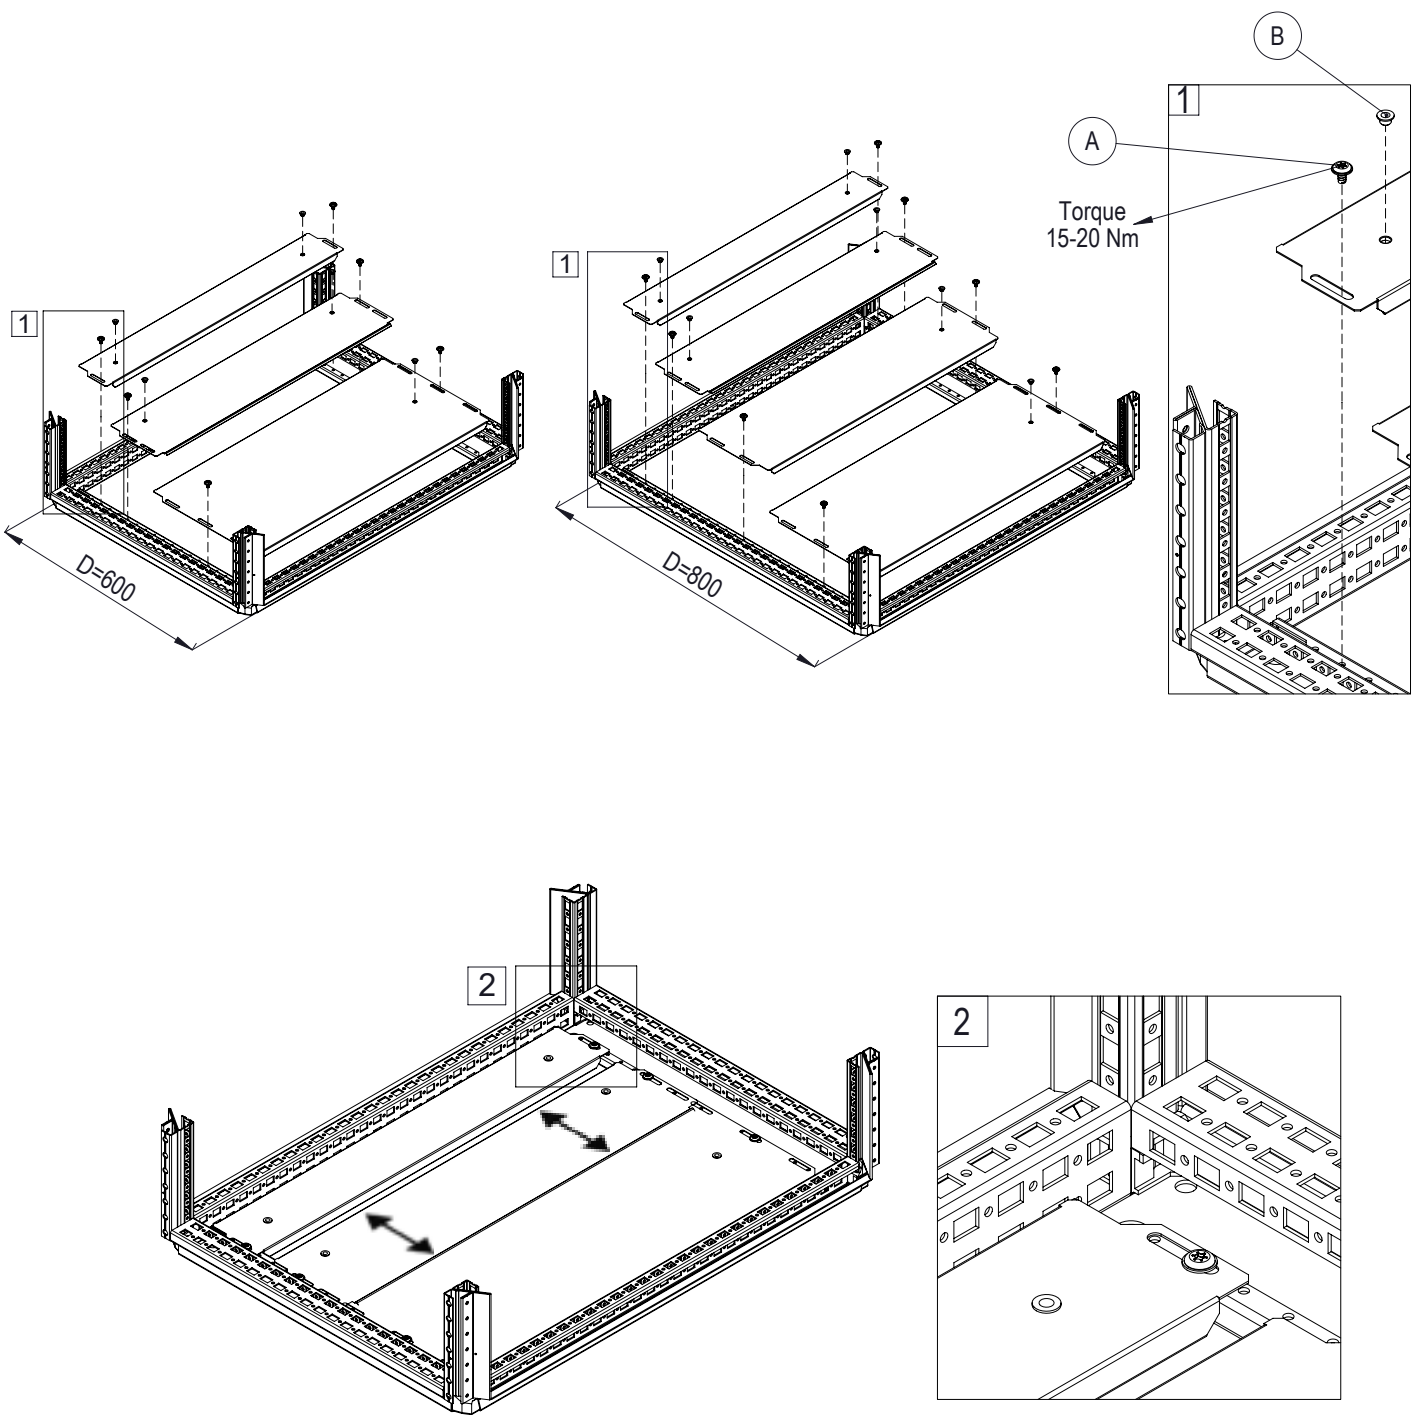Ref.	Pic.	Qty.	
		D=600	D=800
A	St. 5.5x10	6	8
B		5	6







SEALING BOTTOM PLATES *Required for IP55*

Ref.	Pic.	Qty.
A		6 m
B		1.6 m
C		4







BG01 ordered separately

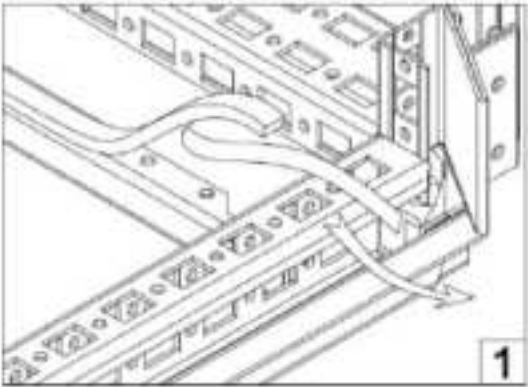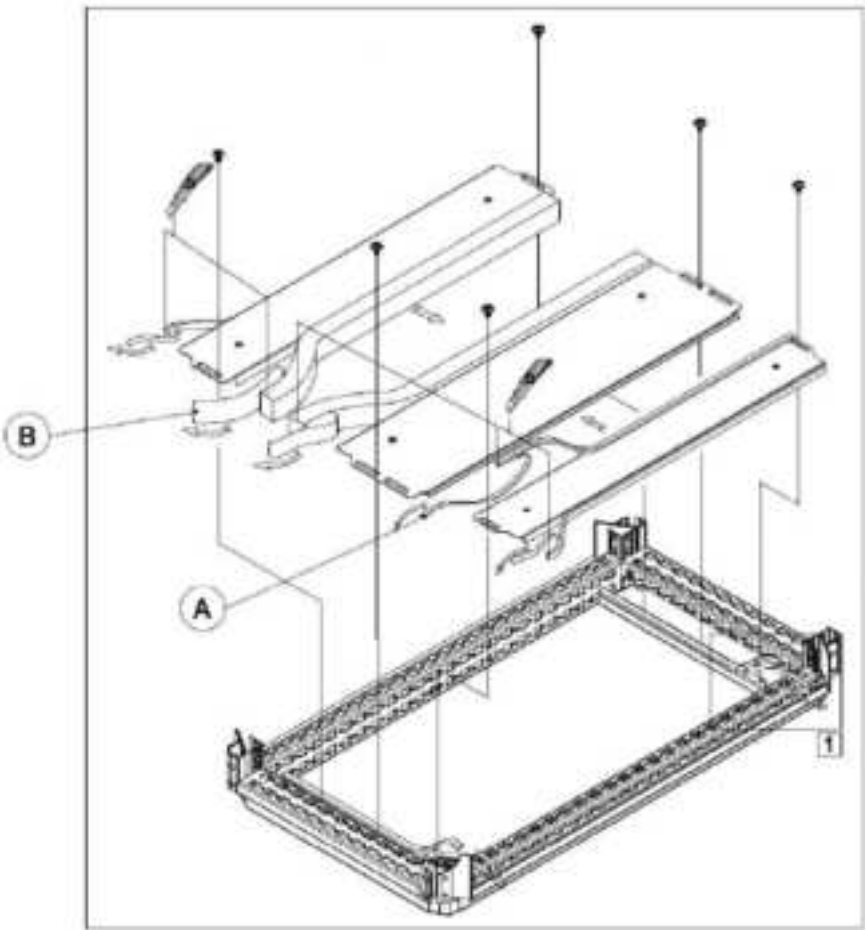



SWING FRAME



Ref.	Pic.	Qty.
A		1
B		1
C		1
D		1
E		1
F		2
G		2
H		10

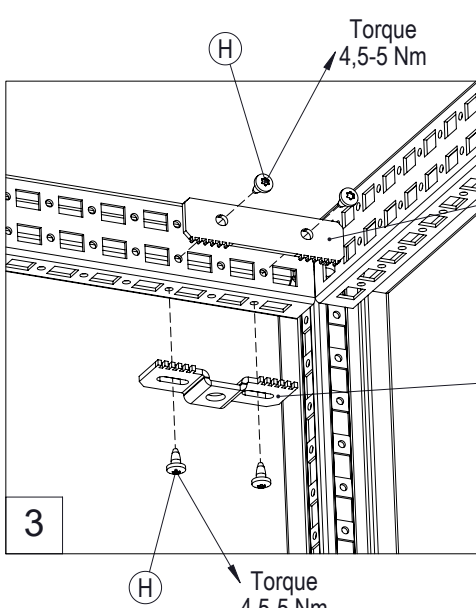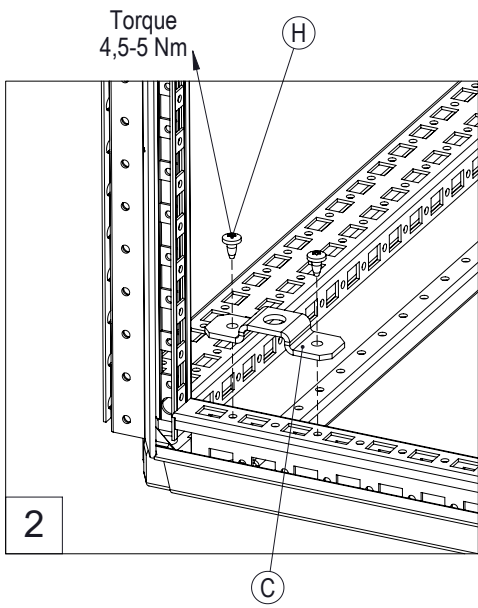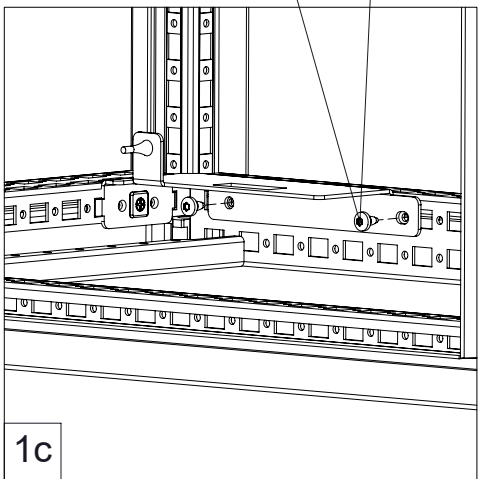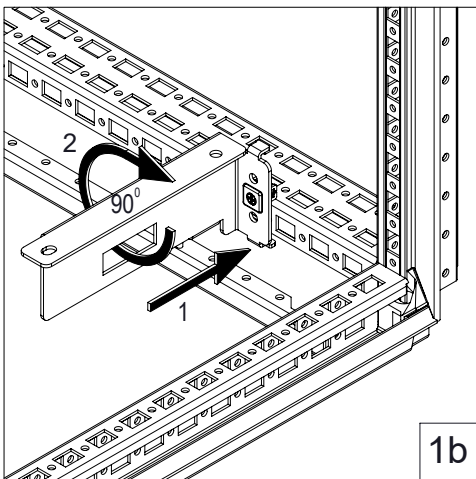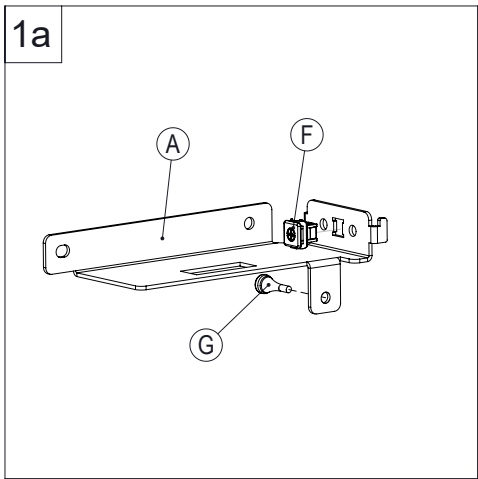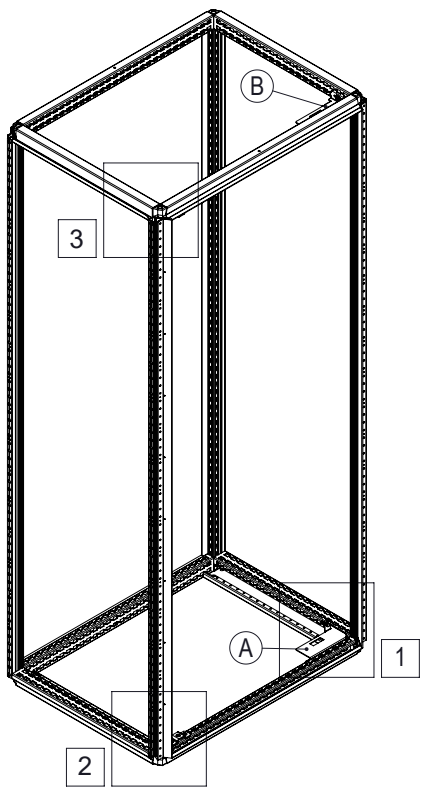







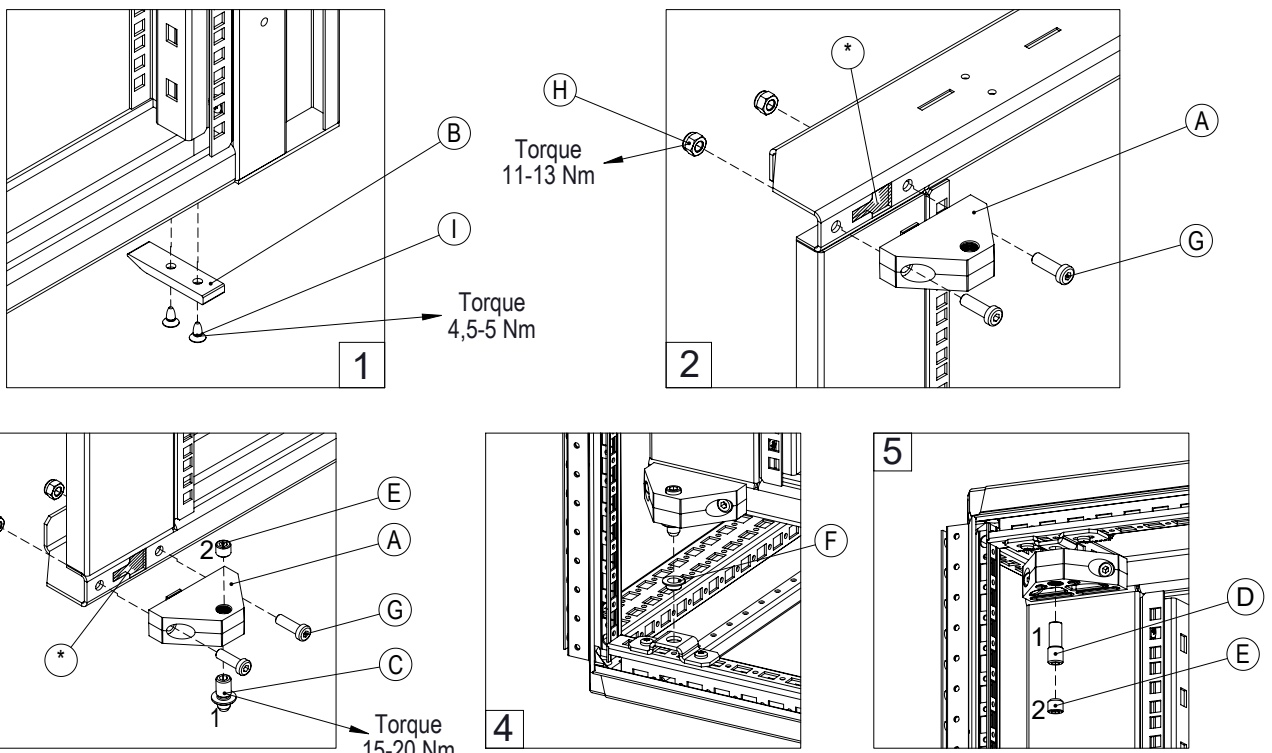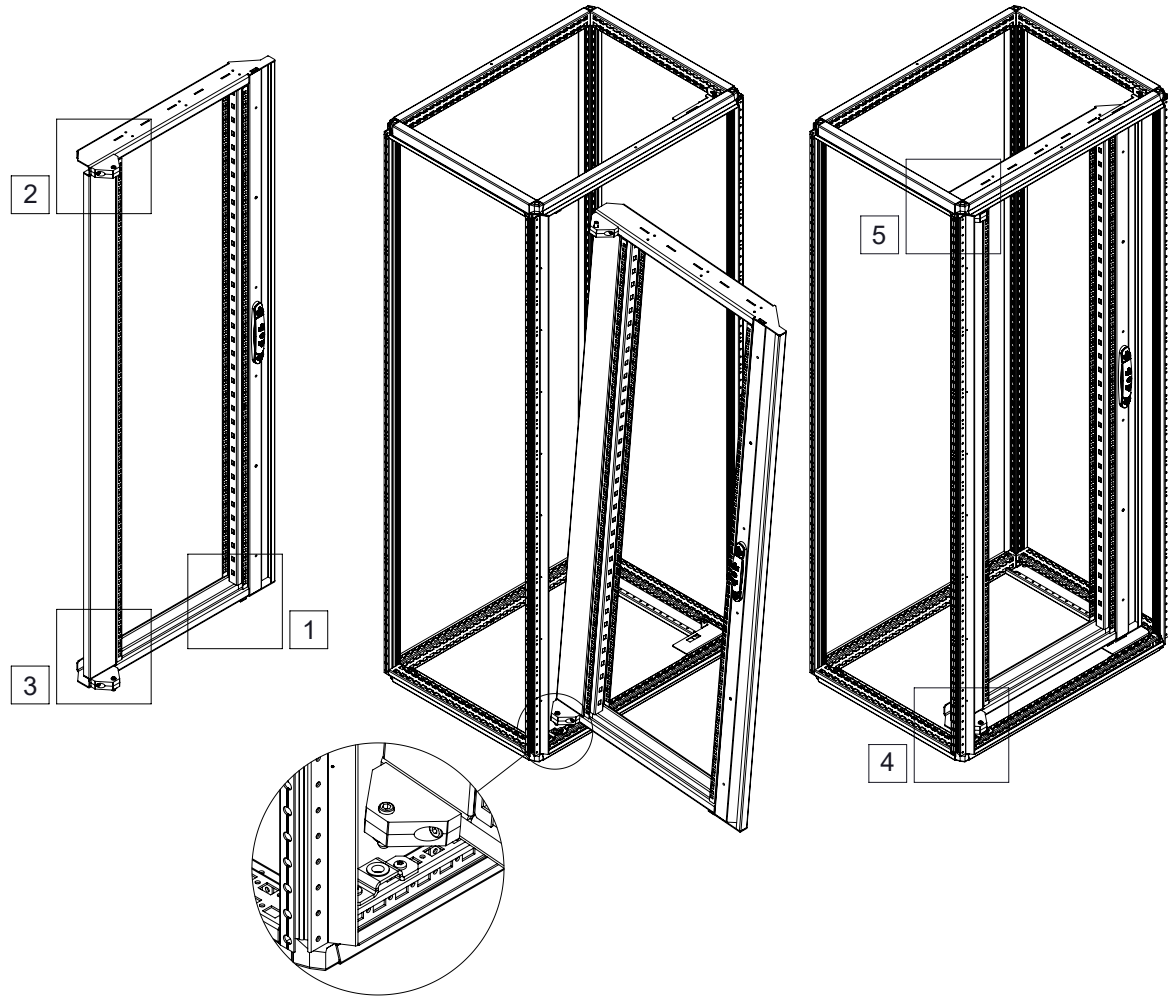


SWING FRAME

Ref.	Pic.	Qty.
A		2
B		1
C		1
D		1
E		2
F		1
G		4
H		4
I		2



* - Remove with straight screwdriver

EARTHING

Ref.	Pic.	Qty.
A		1
B		1
C		1
D		4
E		2
F		2
G		3

