

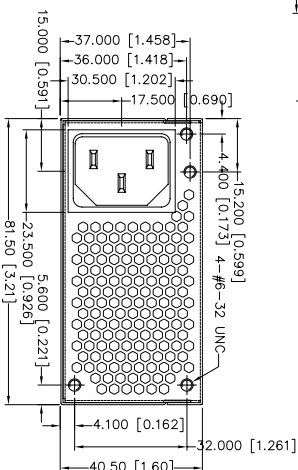


外觀圖

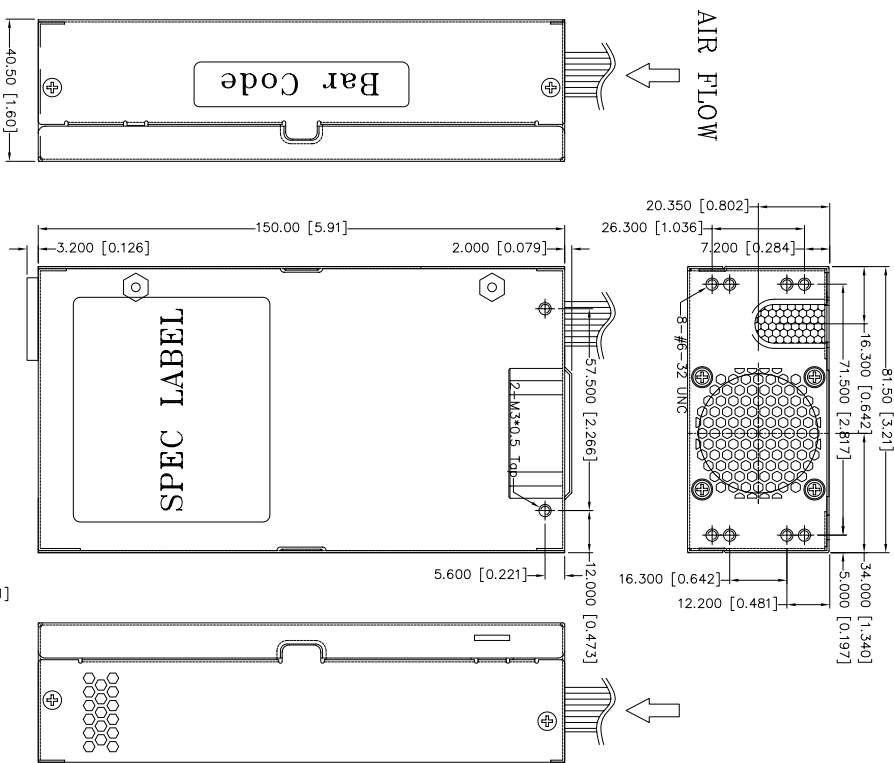

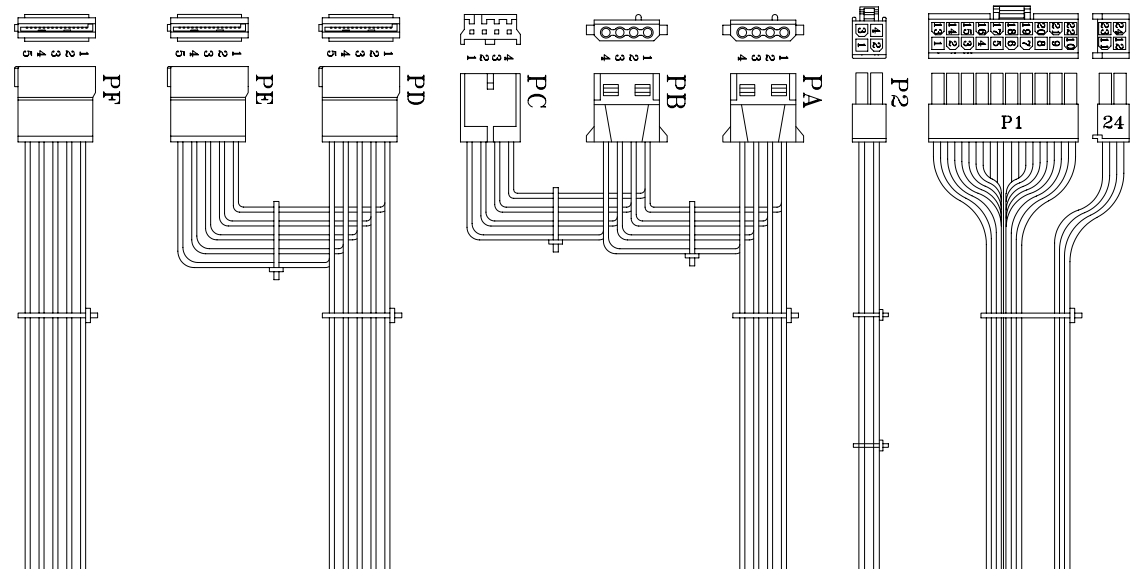

REF. D.	PIN NO.	SIGNAL.	WIRE COLOR	GAGE	CONNECTOR TYPE	LENGTH
P1 / 24	1	+3.3V	ORANGE	20	WST	300±15
	2	+3.3V	ORANGE	20	P29-14600R24ID	300±15
	3	COM	BLACK	20	14600R24ID	
	4	+5V	RED	20	14600R24ID	
	5	COM	BLACK	20	or EQUIV.	
	6	+5V	RED	20		
	7	COM	BLACK	20		
	8	PNV-OK	GRAY	22		
	9	+5V8S	PURPLE	20		
	10	+12V	YELLOW	20		
	11	+12V	YELLOW	20		
	12	+3.3V	ORANGE	20		
	13	+3.3VS	BROWN	22		
	14	-12V	BLUE	22		
	15	COM	BLACK	20		
	16	PS-ON	GREEN	22		
	17	COM	BLACK	20		
	18	COM	BLACK	20		
	19	COM	BLACK	20		
	20					
P2	21	+5V	RED	20		
	22	+5V	RED	20		
	23	+5V	RED	20		
	24	COM	BLACK	20		
PA	1	COM	BLACK	20	MOLEX	450±15
	2	COM	BLACK	20	39-01-	
	3	+12V	YELLOW	20	or EQUIV.	
	4	+12V	YELLOW	20		
PB	1	+12V	YELLOW	20	WST	250±15
	2	COM	BLACK	20	P4-410002	
	3	COM	BLACK	20	or EQUIV.	
	4	+5V	RED	20		
PC	1	+12V	YELLOW	20	WST	155±15
	2	COM	BLACK	20	P4-410002	
	3	COM	BLACK	20	or EQUIV.	
	4	+5V	RED	20		
PD	1	+5V	RED	22	AMP	155±10
	2	COM	BLACK	22	171622-4	
	3	COM	BLACK	22	or EQUIV.	
	4	+12V	YELLOW	22		
PE	1	+3.3V	ORANGE	20	MOLEX	100±10
	2	COM	BLACK	20	SP-67592	
	3	+5V	RED	20	or EQUIV.	
	4	+12V	YELLOW	20		
PF	1	+3.3V	ORANGE	20	MOLEX	300±15
	2	COM	BLACK	20	SP-67592	
	3	+5V	RED	20	or EQUIV.	
	4	+12V	YELLOW	20		

P/N: 9PA250FK09

NOTE:

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01]

UNIT:mm [inch]

MODEL NO. : FSP250-50FEB(F220001)	TITLE: ASSY	SHEET: 1 OF 1 REV:01
R&D(2)	PE	DATE
周書宇		FEB.03.2020
INTERIOR COUNTERSIGN:		