

WALA-SW

Q-CAP Flexible Fixtures - MICRO 5 SERIES




Mounting

WSC-02:

WHITE SNUG CLIP

- For indoor/outdoor use
- Surface mounting
- Stainless steel/corrosion resistant
- Discrete mounting
- White glossy finish




MOUNTING HARDWARE

- #4 flat screw (one provided for each clip)
- 832 Silicone (sold separately)

MICRO5-PPS-2:


PVC MOUNT CLIP

- For indoor/outdoor use
- Surface mounting
- Wire way feature
- Off white finish
- Can be mounted with or without PPS-BRACKET (COVE FRIENDLY)



Built in wireway:

The PPS-BRACKET allows you to create a wire way under the PPS channel without any screws interfering




MOUNTING HARDWARE

- #6 flat head screw (1 screw for every 16")
- 832 Silicone (sold separately)

MICRO5-PPS-96 & MICRO5-PPS-FT:

PVC MOUNT CHANNEL

- 96" (PPS-96) or custom length (PPS-FT)
- For indoor/outdoor use
- Surface mounting
- Field modifications made easy
- Wire way feature
- Off white finish
- Can be mounted with or without PPS-BRACKET (COVE FRIENDLY)

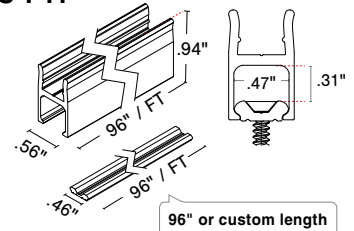

96" or custom length

Built in wireway:

The PPS-BRACKET allows you to create a wire way under the PPS channel without any screws interfering




MOUNTING HARDWARE

- #6 flat head screw (1 screw for every 16")
- 832 Silicone (sold separately)

MICRO5-PPS-LP-2:

PVC LOW PROFILE MOUNT CLIP

- For indoor/outdoor use
- Surface mounting
- Low profile mounting
- No wire way
- Off white finish




MOUNTING HARDWARE

- #6 Flat head screw (1 screw for every 16")
- 832 Silicone (sold separately)

MICRO5-PPS-LP-96 & MICRO5-PPS-LP-FT:

PVC LOW PROFILE MOUNT CHANNEL

- 96" (PPS-LP-96) or custom length (PPS-LP-FT)
- For indoor/outdoor use
- Surface mounting
- Low profile mounting
- No wire way
- Off white finish




96" or custom length

MOUNTING HARDWARE

- #6 Flat head screw (1 screw for every 16")
- 832 Silicone (sold separately)

Mounting Accessories

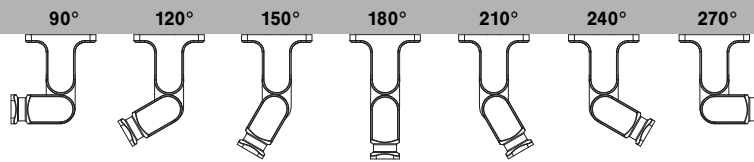


Q-ANGLE


(Full ordering guide and installation available for this product in the [accessories](#) section of website)

- Offset lighting to illuminate signs, artwork, etc.
- For indoor/outdoor use
- Wall, ceiling, or floor mounted
- Anodized aluminum/corrosion resistant
- Free moving rotating head which can be locked into specific angles
- Preset dial notches for easy adjustments from 90° to 270°


90° BACK VIEW



180° BACK VIEW




BASE; BOTTOM VIEW



MOUNTING HARDWARE

- Mounting Clip
- 6-32 Fillister head screw
- 4-40 Flat head screw
- Drywall anchor (not provided)
- #6- 1 1/4 " wood screw



Q-ANGLE MUST BE MOUNTED EVERY 12"

SEE [Q-ANGLE INSTALL](#) FOR MORE INFORMATION

WALA-SW


Q-CAP Flexible Fixtures - MICRO 5 SERIES




Rated

DRY

- Lengths up to 191"
- Encapsulated in polyurethane
- NOT FIELD CUTTABLE

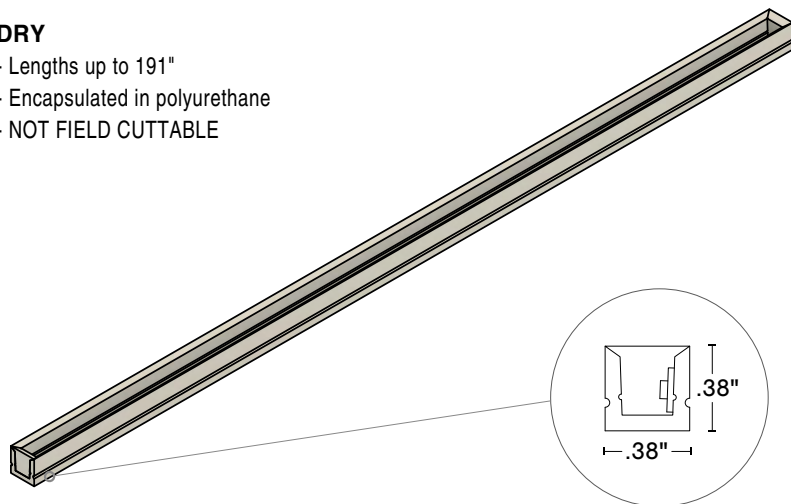


COMPATIBLE CONNECTORS

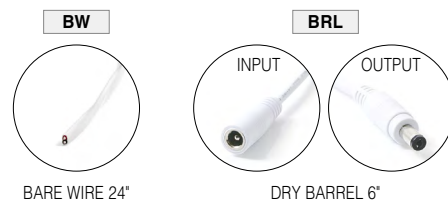

BARE WIRE 24"


DRY BARREL 6"



CONNECTOR 6"
CONNECTOR 24"

WET

- Lengths up to 191"
- Encapsulated in polyurethane
- NOT FIELD CUTTABLE

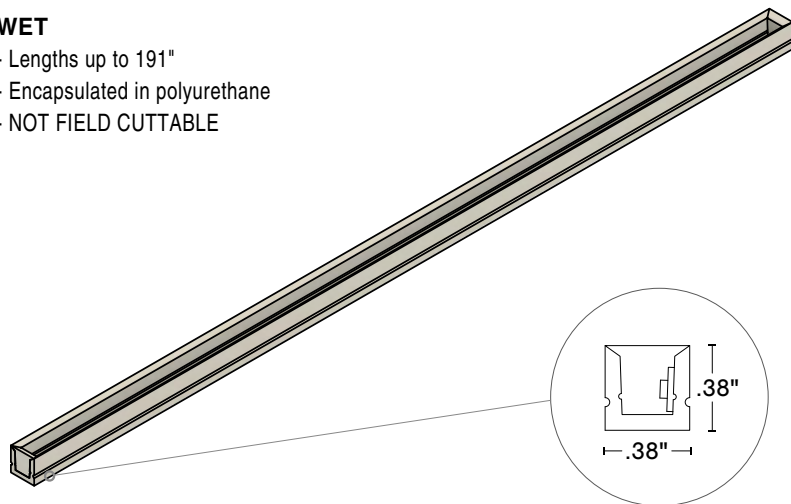

COMPATIBLE CONNECTORS



BARE WIRE 24"

WET BARREL 6"


Lens




ENC/CL Encapsulated in Clear

ENC/TL Encapsulated in Translucent


Light Orientation



Connectors

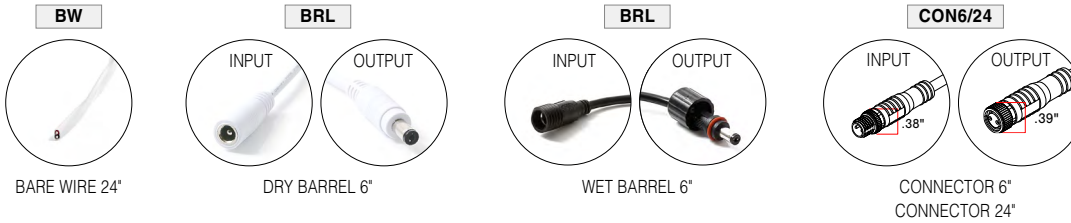


Type





.0" added at end

S1 - Input only




P1 - Input/Output


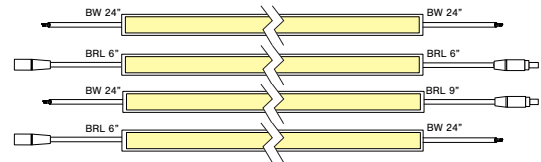


.00" added at end
.25" added to fixture side

S5 - Input only




P5 - Input/Output

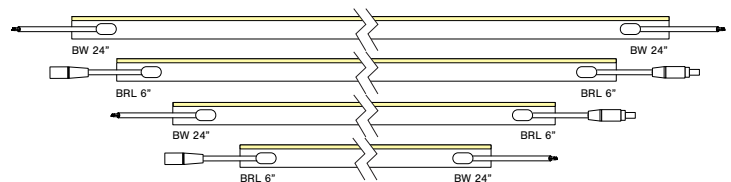


.00" added at end
.25" added to fixture side

S6 - Input only






P6 - Input/Output

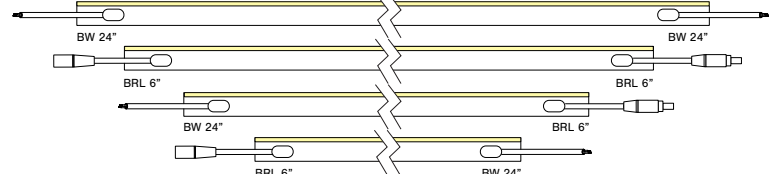


SEAMLESS

Order the **PPS-2** to join two fixtures together with no visible break and order the **PPS-96/PPS-FT** or to support the fixtures, All seamless fixtures have CLEAR endcaps

MICRO5-PPS-2

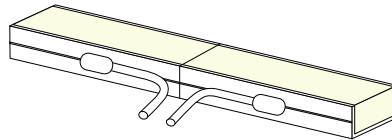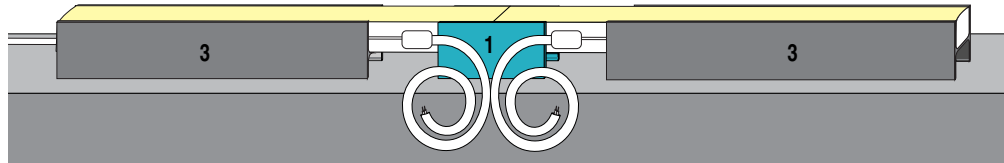

SEAMLESS WITH BARE WIRE



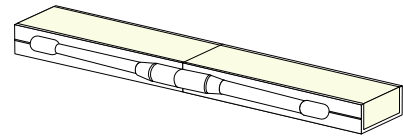


SEAMLESS WITH BARREL CONNECTORS

SEAMLESS

Order the **PPS-LP-2** to support two fixtures together with no visible break and order the **PPS-LP-96/PPS-LP-FT** to support the fixture

MICRO5-PPS-LP-2

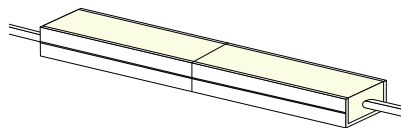

FIXTURE WITH BARE WIRE

- ① = PPS - 2
- ② = PPS - LP - 2
- ③ = PPS - 96/PPS - FT or PPS - LP - 96/PPS - LP - FT

Connectors/Wire

BARE WIRE

- 22 AWG, 2 conductor
- Outdoor rated
- 24" Standard length

BW



BARE WIRE

DRY BARREL

- 22 AWG
- Dry rated
- 6" Standard length including connector

BRL



INPUT CONNECTOR



OUTPUT CONNECTOR

WET BARREL

- 22 AWG
- Wet rated
- 6" Standard length including connector

BRL



INPUT CONNECTOR




OUTPUT CONNECTOR


CONNECTOR 6" / CONNECTOR 24"

- 22 AWG, 2 conductor
- Indoor rated
- 6" or 24" Standard length

CON6 / CON24



INPUT CONNECTOR



OUTPUT CONNECTOR

Related Products

TWO-FER

Sold: Individually



Two outputs and one input

FOUR-FER

Sold: Individually



Four outputs and one input

MALE BENDER

Sold: Individually



Connects an input to an input

FEMALE BENDER

Sold: Individually



Connects an output to an output

Q-MINI-J*

Sold: Individually



Junction box that allows for splicing of LED lead wires

*Full ordering guide available for this product in the [accessories](#) section of website