


Under Counter ProMax Dual Extension Kit

This kit is designed to separate a dual under counter system into two separate units. Intended for use when there's not enough room for the dual system mounted in one location.

Contents


Your kit includes the following:

- (a) bracket w/4 screws (2)
- (b) brass fittings (2)
- (c) stainless steel 30" flex hose with 3/8" female ends

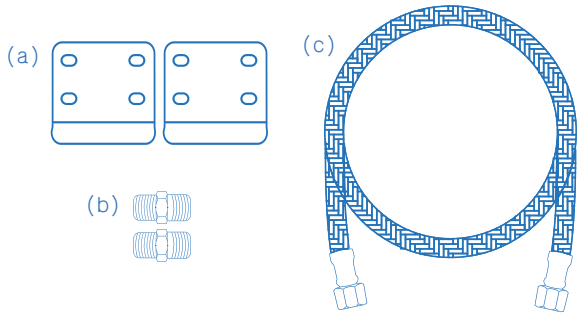

Installing Your Kit

1. Turn off the water supply line going to your dual system before removal.
2. Remove the dual mounting bracket from your system.
3. While holding one housing, turn the other counter clockwise to detach the connected housings.
4. Remove the nipple connector.
5. Install a bracket using the supplied screws to each housing base
6. Insert a new fitting using Teflon tape into the outlet of the pre-sediment filter and one into the inlet of the primary filter. Tighten securely.
7. Mount both housings making sure the included flex hose will reach each housing.
8. Attach the flex hose to both fittings installed.
9. Attach the inlet water supply line.
10. Slowly turn the water back on while looking for any possible leaks.

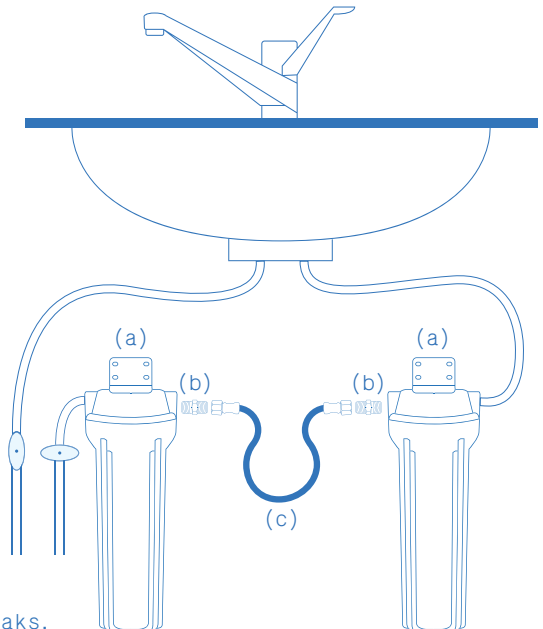

*Periodically inspect your system for any developing leaks.