

2MP MINI PIN HOLE PHOTOGRAPHIC CAMERA



ENC-HMP5F-00R-50


FEATURES

2.8 mm (Optional 2.1 mm) Fixed lens

ONVIF Profile (S, G, T)

Triple streams

Audio & Alarm Support



SPECIFICATION

MODEL	Model No.	ENC-HMP5F-00R-50
	Type	2MP MINI PIN HOLE PHOTOGRAPHIC CAMERA
CAMERA	Image Sensor	1/2.8" Progressive Scan CMOS
	Day/Night	IR Cut Filter with Auto Switch
	Lens Type	Fixed
	Focus	Fixed
	Iris Type	Fixed Iris
	Focal Length	2.8 mm (Optional 2.1 mm)
	Angle of View (H)	113.9° (Optional 135.0°)
	Angle of View (V)	60.0° (Optional 75.6°)
	Angle of View (D)	128.5° (Optional 154.7°)
	Aperture Range	2.8 mm @ F2.0 (Optional 2.1 mm @ F1.8)
	Electronic Shutter	1/5 ~ 1/20,000s, Auto / Manual
	Min. illumination	Color: 0.01 Lux @ F2.0/F1.8 B/W: 0.001 Lux, 0 lux
	AGC	Auto / Manual
	Digital Noise Reduction	2D & 3D DNR
	S/N Ratio	≥55 dB
	Defog	Smart Defog
	WDR	120dB
VIDEO	Max. Resolution	1920×1080
	Video Compression	Enhanced (H.265, H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream : (1920×1080, 1280×720) @ 25fps Sub Stream : (704×576, 640×480, 640×360, 352×288, 320×240) @ 25fps Third Stream : (640×480, 352×288, 320×240) @ 25fps
	Stream Settings	i-Frame, PAL, Frame Rate
	Video Bit Rate	100kbps ~ 6Mbps
	Bit Rate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night(Color, Mono, Auto), Flip/Mirror/Rotation, Multiple Scene & Profile
	White Balance	Auto / Manual
	Corridor Mode	Supported
	HLC	Supported
	BLC	Supported
	OSD	Up to 7 regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes, Image overlay
	ROI	Up to 8 regions
	Privacy Masking	Up to 4 regions


2MP MINI PIN HOLE PHOTOGRAPHIC CAMERA



ENC-HMP5F-00R-50

MODEL	Model No.	ENC-HMP5F-00R-50
	Type	2MP MINI PIN HOLE PHOTOGRAPHIC CAMERA
AUDIO	Audio Compression	G.711A, G.711U, RAW_PCM
	Audio Bit Rate	64 kbps, 128 kbps
	Audio I/O	1 / 1
SMART	Behaviour Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering
	Statistical Analysis	Face Detection, Wrong Way Detection, Human & Vehicle Detection, Alarm triggering
	Alarm Management	Motion Detection, Input & Output Event, Network Alarm, Disk Alarm, Day Night Switch Alarm, Abnormal Audio Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot
	Alarm Notifications	E-mail (Notification and Snapshot), HTTP (Alarm Icon), FTP (Snapshot and Recording), SD Card (Recording)
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IPv6, HTTP, HTTPS, FTP, DHCP, DNS, RTSP, RTP, RTCP, PPPoE, NTP, UPnP, SMTP, 802.1x, ARP, SNMP, TLS/SSL
	Security	AES 128 / 256 Video Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication (EAP-MD5), HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T), SDK / CGI
	Network	1xRJ45 10/100M self adaptive Ethernet port
	Alarm I/O	2 / 1
	Edge Storage	Micro SD Card Slot, up to 512 GB
	ANR	Supported
	CVBS Output	Supported
	Max. User	32
	Client Application	EyeGuard
GENERAL	Power Supply	DC 12V
	Power Consumption	≤3W
	Working Temperature	-30°C ~ 55°C
	Working Humidity	≤90% RH
	Casing	Metal
	Reset button	Supported
	Dimensions	37.6 x 44.1 x 46.5 mm
	Net Weight	0.18 Kg

Dimension Unit : mm

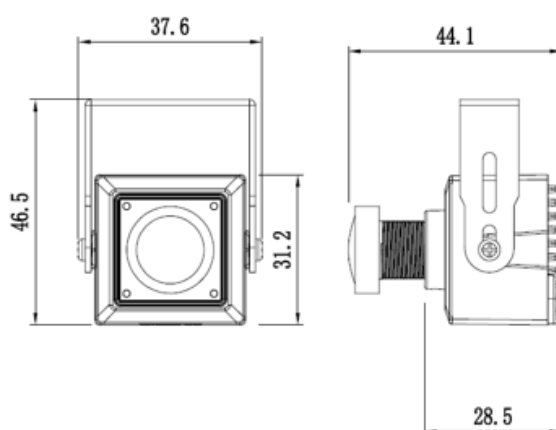

2MP MINI PIN HOLE PHOTOGRAPHIC CAMERA



ENC-HMP5F-00R-50

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HMP5F-00R-50 (With 2.8 mm Fixed Lens)	2MP Mini Pin Hole Photographic Camera with 2.8 mm Fixed Lens, WDR , SD Card, & Smart Analytics	1
ENC-HMP5F-00R-50 (With 2.1 mm Fixed Lens)	2MP Mini Pin Hole Photographic Camera with 2.1 mm Fixed Lens, WDR, SD Card, & Smart Analytics	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HMP5F-00R-50	Carton Box	-	-

★Product specification and availability are subject to change without notice.