



PRO-X6.4BM

6.5" MIDRANGE LOUDSPEAKER
WITH BULLET

MAX Power Handling: 500 Watts

RMS Power Handling: 250 Watts

Frequency Response: 125Hz-12KHz

Voice Coil Diameter: 1.5" / 38.1 mm

Voice Coil Material: Kapton


Nominal Impedance: 4 ohm

Sensitivity (1W/1M): 94dB

Magnet Weight: 30 oz

Magnet Material: Ferrite

Mounting Depth: 2.44" / 62 mm

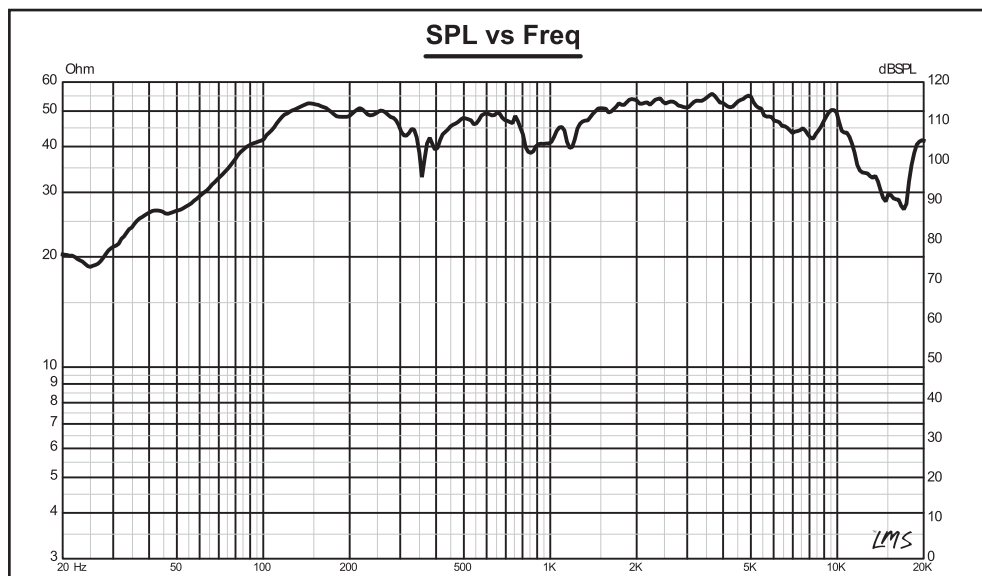

PRO-X6.4BM

6.5" MIDRANGE LOUDSPEAKER
WITH BULLET



500W MAX



250W RMS

4 OHMS

OWNER'S MANUAL



PRO-X6.4BM

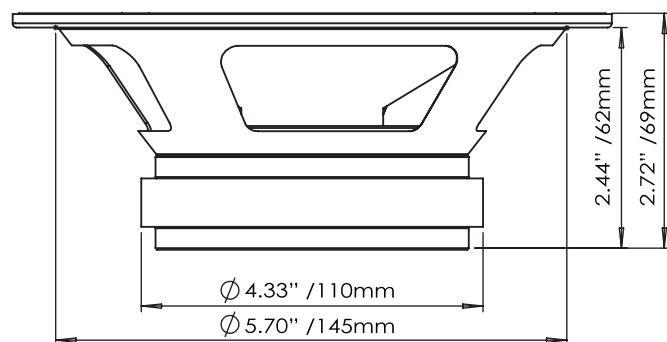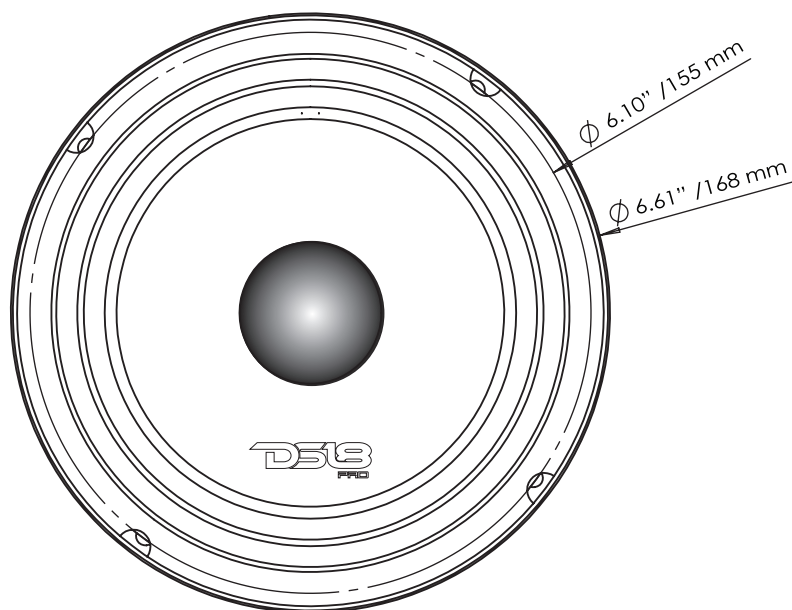

DS18.COM



Data Sheet

Specifications:

Nominal Diameter	6.5" (165.1 mm)
Nominal Impedance	4 ohms
MAX Power Handling	500W
RMS Power Handling	250W
Sensitivity (1w/1m)	94dB
Frequency Response	125Hz-12KHz
Recommended Hi Pass Crossover	120 Hz

Midrange:

Voice Coil Diameter	1.5" (38.1 mm)
Voice Coil Former Material	Kapton
Winding Material	CCAW
Basket Material	Steel
Magnet Weight	30 oz


Thiele & Small Parameters:

Equivalent Volume	Vas	3.810 LTR
Excursion	Xmax	8.2mm
Free Air Resonance	Fs	106 Hz
Mechanical Factor	Qms	8.027
Electrical Factor	Qes	0.471
Total Factor	Qts	0.445
Dc Resistance	Re	3.2 ohms

Measurements:

Overall Diameter	168 mm (6.61")
Front Mount Baffle Cutout	145 mm (5.70")
Mounting Depth	62 mm (2.44")
Overall Depth	69 mm (2.72")

#WeLikeItLoud



PRO-X6.4BM 6.5 INCH MIDRANGE LOUDSPEAKER WITH BULLET