

材质128g单铜
尺寸:450*90mm
工艺:正反彩刷


450.00mm

90.00mm



Diagram illustrating the components of the foldable stand:


- Cooling Vent
- Anti-slip Silicon
- Fold axis
- Type-C Port

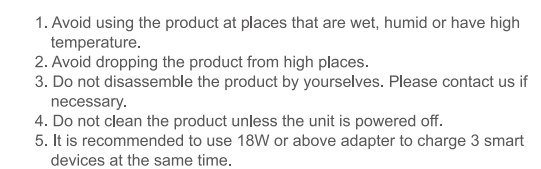

90.00mm

 MADE IN CHINA

Das Diagramm zeigt eine Detailansicht des Typ C-Ladeanschlusses. Beschriftungen mit Pfeilen weisen auf folgende Teile hin: 'Kühlöffnung' (am oberen Ende des Anschlusses), 'Achse' (die drehbare Verbindung), 'Typ C-Ladeanschluss' (das eigentliche Ladekabelende) und 'Rutsch Silikon' (das gummierte Gleitelement am Ende des Stützes).

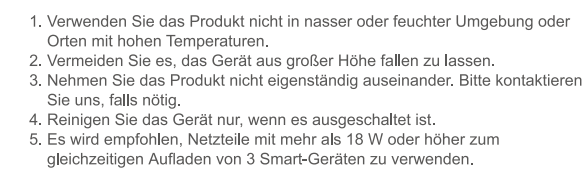

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment