


TouchWo® 15.6" Touch Pc

Model : DM156G

Views & Dimensions

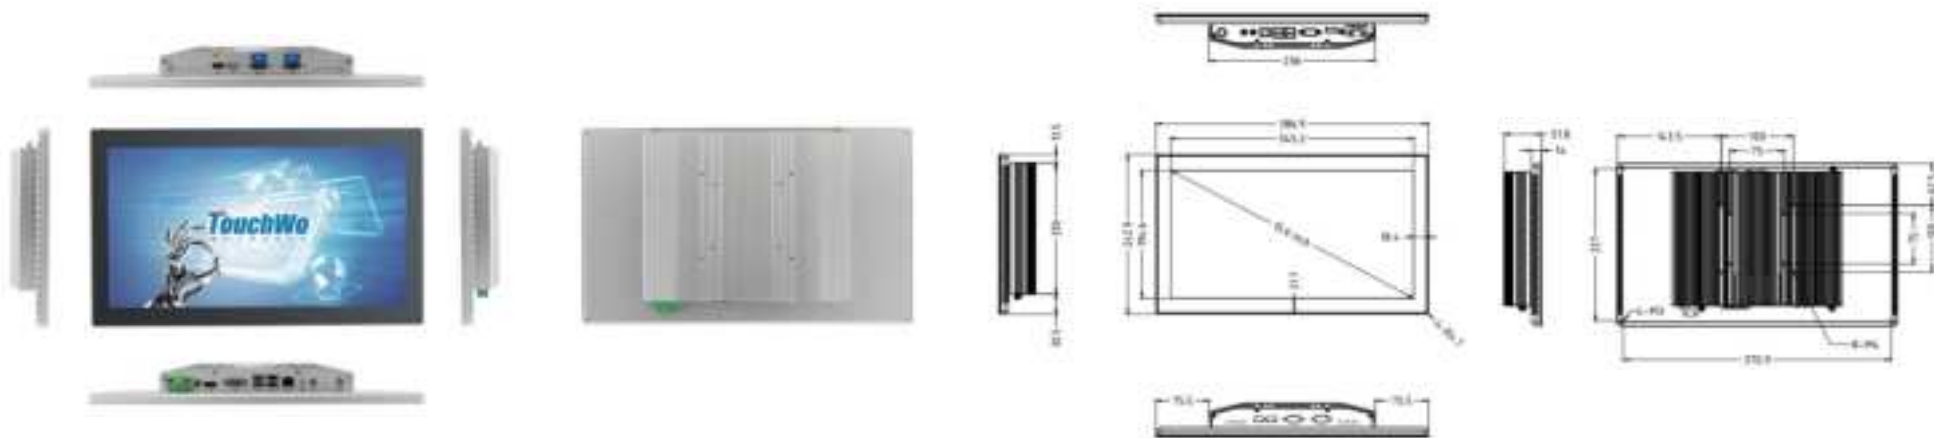

Features

- **24/7 Commercial Use**

Industrial-grade Power Supply

15,000-hour extended life LCD display

- **Support multiple installation requirements**

- **Stylish Appearance**

High precision die-casting integrated molding

High quality structural design of aluminum alloy

- **Surface IP65 waterproof**

CE FC RoHS

Tech Specs

LCD Panel	Screen diagonal	15.6 inch	Touch Panel	Touch technology	PCAP
	Physical resolution	1920*1080		Response time	<5ms
	Aspect ratio	16 : 9		Touch points	10 points standard
	Display size (mm)	345.2(W)*194.6(H)		Touch effective recognition	>1.5mm
	Colours displayed	16.7M		Scanning Frequency	200Hz
	Brightness (cd/m2)	≥250cd/m2		Scanning accuracy	4096 * 4096
	Contrast	≥ 800: 1		Working Current/Voltage	180Ma/DC+5V±5%
	Visual Angle H/V (°)	85/85/85/85(Typ.) (CR≥10)		Surface Hardness	Mohs class 7 explosion-proof glass
	Backlight Lifetime (hours)	15000h			
Refrash Rate	60 Hz				
Operation Environment	Operation Temperature	0℃-50℃	Dimension	Machine(cm)	38.7(L) * 24.3(W) * 5.2(H)
	Operation Humidity	10% - 80%		Package(cm)	45(L) * 34.5(W) * 14.3(H)
	Storage Temperature	-5℃-60℃		Net weight	3.86 KG
	Storage Humidity	10% - 85%		Gross weight	5.35 KG
	EMC	CE/FCC Class B		Mounting bracket	Desktop/Wall mounted

**PC System-
Windows**

CPU	Intel Celeron® J6412	Intel® Core™ i5-8Gens	Intel® Core™ i7-10Gens
Graphic GPU	Intel® UHD Graphics	Intel® Iris® Plus Graphics 645	Intel® UHD Graphics
Audio	HD Audio: ALC269	HD Audio: ALC269	HD Audio: ALC269
Memory	DDR4-2666MHz-SODIMM-4G	DDR4-2666MHz-SODIMM-8G	DDR4-2666MHz-SODIMM-16G
Storage	mSATA-128GB	mSATA-256GB	mSATA-512GB
Network	10/100/1000M RJ45, 802.11a/b/g/n/ac Wifi		
Pre-installed OS	Windows 10 /11/Linux		

**Power supply
parameters**

Power Output	DC 12V5A	Manual	* 1
Standby power consumption	<36W	Mounting bracket	* 1

**Vibration
during work**

SSD applied: 1.5 Grms, IEC 60068-2-64, random,
5 ~ 500 Hz, 1 hr/axis

**Included in the
Delivery**

Power Adapter&cable * 1

**Impact during
work**

SSD applied: 10 G, IEC 60068-2-27, Half sine wave,
lasting for 11ms

WiFi antenna * 1

External Connectors



Network 1 * 10/100/1000Mbps controller/1 * wifi

Serial port 2 * RS-232 /(1 * RS-485 optional)

HDMI 1 * HDMI 1.4

USB 2 * USB3.0; 4 * USB2.0

Power interface 1 * 2P Phoenix terminal interface/1 * DC2.1

Audio 1 * Earphones/1 * Microphone

Use Case

