

Thermostat replacement

1. Turn off oven and disconnect from power supply
2. Remove knob from thermostat dial (Fig. 1)
3. Remove lower front cover, under the doors, by opening the doors and removing screws
4. Remove right side panel by removing screws along the back edge of the panel and in the lower right front corner (Fig. 3)
5. Remove Phillips screws holding thermostat to control panel
6. Remove wiring from thermostat, note locations as they are similar to new replacement thermostat (Fig. 2)
7. Remove existing thermostat probe by removing Phillips screws from mount and pull towards you (Fig. 4)

New thermostat = 351030208

New thermostat probe = 351170069

New bracket = 351150756

Temperature dial sticker = 351124365

8. Install new thermostat onto new bracket with Phillips head screws from old thermostat mounting locations. Note orientation of bracket and thermostat (Fig. 5)
9. Install wiring onto new thermostat, ensure locations are correct for power supply, same as old thermostat (Fig. 6 & 7)
10. Install new thermostat probe wiring onto new thermostat (Fig. 7)
11. New thermostat probe is installed the same as the old thermostat probe
12. Place new temperature dial sticker onto the front of the control panel, reference the 3 holes for alignment
13. Install new thermostat to control panel with Phillips screws (Fig. 8)
14. Install knob onto thermostat dial post. Note, you may have to hold the back side of the thermostat to fully seat the knob on the dial post



Fig. 1




Fig. 3



Fig. 2



Fig. 5



Fig. 4

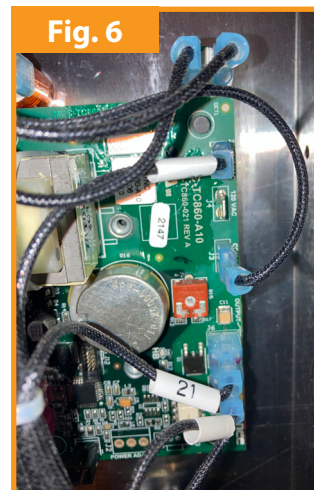


Fig. 6



Fig. 7



Fig. 8



Fig. 9