

SOFTWARE

FIELD SURVEYING SOFTWARE

- Compatible with most brands of NMEA devices
- Available Datums of most countries and regions
- Full work modes – PDA CORS, internal/external radio, GSM and etc.
- Various survey methods – topo survey, road stake, surface stake, CAD stake and etc.
- Support tilt initialization and measurement
- Abundant formats supported – TXT, DXF, CSV, HTML, KML, SHP and etc.
- SingularPad can be used with both GNSS receiver and total station.



Professional Version
SingularPad

GNSS POST-PROCESSING SOFTWARE

- Support both static and kinematic post-processing
- Support GPS/GLONASS/BeiDou/Galileo GNSS raw data processing
- Support raw data formats like binary, RINEX, RTCM32 and etc.
- Support multiple baseline processing and adjustment methods
- Support various output formats, including HTML, TXT, KML and etc.



X1 GNSS RECEIVER

Version 24-03-2024

SATELLITES TRACKING

Channels	1408
BDS	B1I, B2I, B3I, B1C, B2a, B2b ¹
GPS	L1 C/A, L1C, L2P, L2C, L5
GLONASS	G1, G2, G3
Galileo	E1, E5a, E5b
QZSS	L1, L2, L5
IRNSS	L5
SBAS	WAAS, EGNOS, SDCM, BDSBAS, GAGAN
L-Band	Upgradeable
Cold start	<30s
RTK Initialization Time	<5s(typical)
RTK initialization reliability	>99.9%
Re-acquisition	<1s

ACCURACY

Standalone	1.5m Horizontally 2.5m Vertically
DGPS	0.4m Horizontally 0.8m Vertically
Static post-processing	2.5mm+0.5ppm Horizontally 5mm+0.5ppm Vertically
RTK	8mm+1ppm Horizontally 15mm+1ppm Vertically
SBAS	< 1.0 m 3D RMS
Time Accuracy	20ns
Tilt surveying	< 2.5cm, within 60° tilt

COMMUNICATION

4G modem (For X1 & X1 Pro only)	FDD-LTE B1/B3/B5/B7/B8 TDD-LTE B38/B39/B40/B41 TDSCDMA B34/B39 WCDMA B1/B2/B5/B8 GSM B2/B3/B5/B8 CDMA1x/CDMA2000 BC0/BC1
UHF modem ²	- Working range: 5km – 15km ³ , in ideal environments - Frequency range: 410-470MHz - Protocol: TRIMATLK, TRANSEOT, SATEL, TRIMMARK3, etc. - Channel spacing: 25KHz - Transmit power: 0.5W/1W selectable
Bluetooth	BT4.0 dual mode
NFC	Support NFC connection
WiFi	802.11 a/b/g/n/ac
Interface	- 1 7-pin lemo port for RS232 transmission and power supply - 1 SIM card slot for 4G(For X1 & X1 Pro only) - 1 TNC connector for UHF antenna - 1 Type-C USB port for static data download & firmware upgrade

DATA FORMAT

Data output format	- NMEA-0183 - RINEX 3.02/3.04 - Binary format *.xyz
Data update rate	1~50Hz selectable
Correction data format	- RTCM v3.3/3.2/3.1/3.0 - CMR
Supported protocols	Ntrip client, Ntrip Server, Ntrip Caster, TCP

USER INTERACTION

Indicators	4 LEDs indicating battery/charging, satellite tracking, correction data transmission, and 4G status/static recording
Display(For X1 Pro only)	1.1" OLED display
Button	2 buttons for power and function
WebUI	- Accessible via Wi-Fi - Support configuration, status checking, data transfer, data storage and system upgrade

ELECTRICAL

Power consumption	2.0 W ⁴
Input voltage	DC 9~28V
Battery	- 6700 mAh, over 20 hours working time - Fast charge of 2.5 hours charging time

PHYSICAL

Size	Φ133.5 mm × 67 mm
Weight	870 g
Storage	8 GB ⁵
Housing material	Magnesium-aluminum alloy
Speaker (optional)	For voice broadcast of real-time status

ENVIRONMENTAL

Working temperature	-40 ℃ to + 65 ℃
Storage temperature	-55 ℃ to + 85 ℃
Humidity	100% non-condensing
Waterproof & dustproof	IP68
Drop	Designed to survive a 2m drop onto concrete

- The BDS B2b signal is reserved for future upgrade.
 - The enhanced UHF modem is compatible with common UHF modems in the market in RX mode, but not in TX mode. To accommodate the need to use X1-Series as base for other common UHF rovers, SingularXYZ also offers regular UHF as an option. Please clarify your requirements when placing the order.
 - The maximum working range of the enhanced UHF modem is 15km in ideal environments.
 - The power consumption of X1-series varies with the different work modes.
 - Storage can be expanded to 32GB according to user demands.
- All specifications are subject to change without notice.

©2024 SingularXYZ Intelligent Technology Ltd. All rights reserved. SingularXYZ® is the official trademark of SingularXYZ Intelligent Technology Ltd., registered in People's Republic of China, EU. All other trademarks are the property of their respective owners.

+86-21-60835489
+86-21-60835497
singularxyz@singularxyz.com
www.singularxyz.com

SingularXYZ®
SingularXYZ Intelligent Technology Ltd.
Floor 2, Building A, No. 599 Gaojing Road, 201702 Shanghai, China

X1-SERIES GNSS RECEIVERS

PROFESSIONAL SURVEYING SOLUTIONS

Meet your needs at different levels



SingularXYZ®

X1-SERIES GNSS RECEIVERS

Nowadays, with more and more "full-function" GNSS receivers appearing on the market, how to make the receiver smaller and more durable while maintaining its functionality has become the point.

On the one hand, the X1-series has greatly optimized the RTK performance and main functions in all aspects, and at the same time makes it smaller to reduce your burden, providing the smallest size at the same performance level.

On the other hand, for different levels of user needs, the SingularXYZ team will launch several receiver models of the X1-series to provide more choices for wide users.



X1-SERIES GNSS RECEIVERS

X1 Lite
GNSS Receivers

X1
GNSS Receivers

X1 Pro
GNSS Receivers

FULL-CONSTELLATION
1598 channels for synchronously track GPS, GLONASS, BeiDou, Galileo, QZSS, Navic and SBAS, delivering centimeter accuracy.

IMU
60° TILT IMU
The built-in IMU module supports up to 60° tilt surveying while keeping the accuracy within 2.5cm

PDA CORS
Connected via Bluetooth, X1 Lite can obtain CORS data through the PDA network to get a stable RTK fixed solution.

IP68
RUGGED HOUSING
IP68 waterproof and dustproof protection and 1.5m anti-drop design of X1-series, coping with harsh working environments.

WEB UI
Accessed via WiFi, users can easily configure work modes, download data, upgrade firmware and check device status via web UI.

UHF
ENHANCED UHF
The enhanced UHF can achieve up to 15km working range with 2W power, reducing your burden without the need of external radio.

NFC
NFC CONNECTION
Equipped with an NFC chip, users can easily connect the X1 Lite and the data collector with just one touch, without searching for pairing

PORTABLE SIZE
Compared with most GNSS receivers, X1 Lite shows small size and light weight for your convenience in the field.

6700
6700MAH BATTERIES
Built-in battery with 6700mAh large capacity support more than 20hrs working time and less than 2.5 hrs charging time.


8GB
8GB STORAGE
8GB large internal memory guarantees your long-time GNSS raw data recording for static surveying.

4G
INTERNAL 4G
With a plug-in SIM card, you can set up the X1 as an internal GSM base station or connect to CORS without a PDA network.

OLED
1.1" FRONT PANEL
Clear & detailed device status checking and easy configuration via the front panel.

X1-SERIES GNSS RECEIVERS

Strong Performance in Different Environments

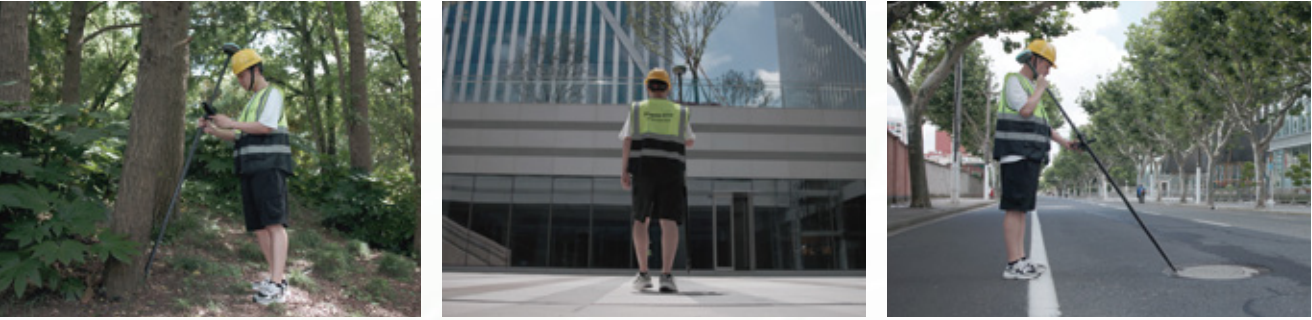

T8 TABLET

Powered by Android 10 OS

IP67
IP67 & 1.5m anti-drop

4G
4G/WiFi/Bluetooth communication

8"
8" sunlight-readable touch screen

12h
8200mAh battery for 12h operating

4GB RAM + 64GB ROM + Extend TF